

AMDSK链条


阿姆达数控技术无锡有限公司

AMDSK Technology(Wuxi)Co.,Ltd




www.amdsk.com

部分产品展示

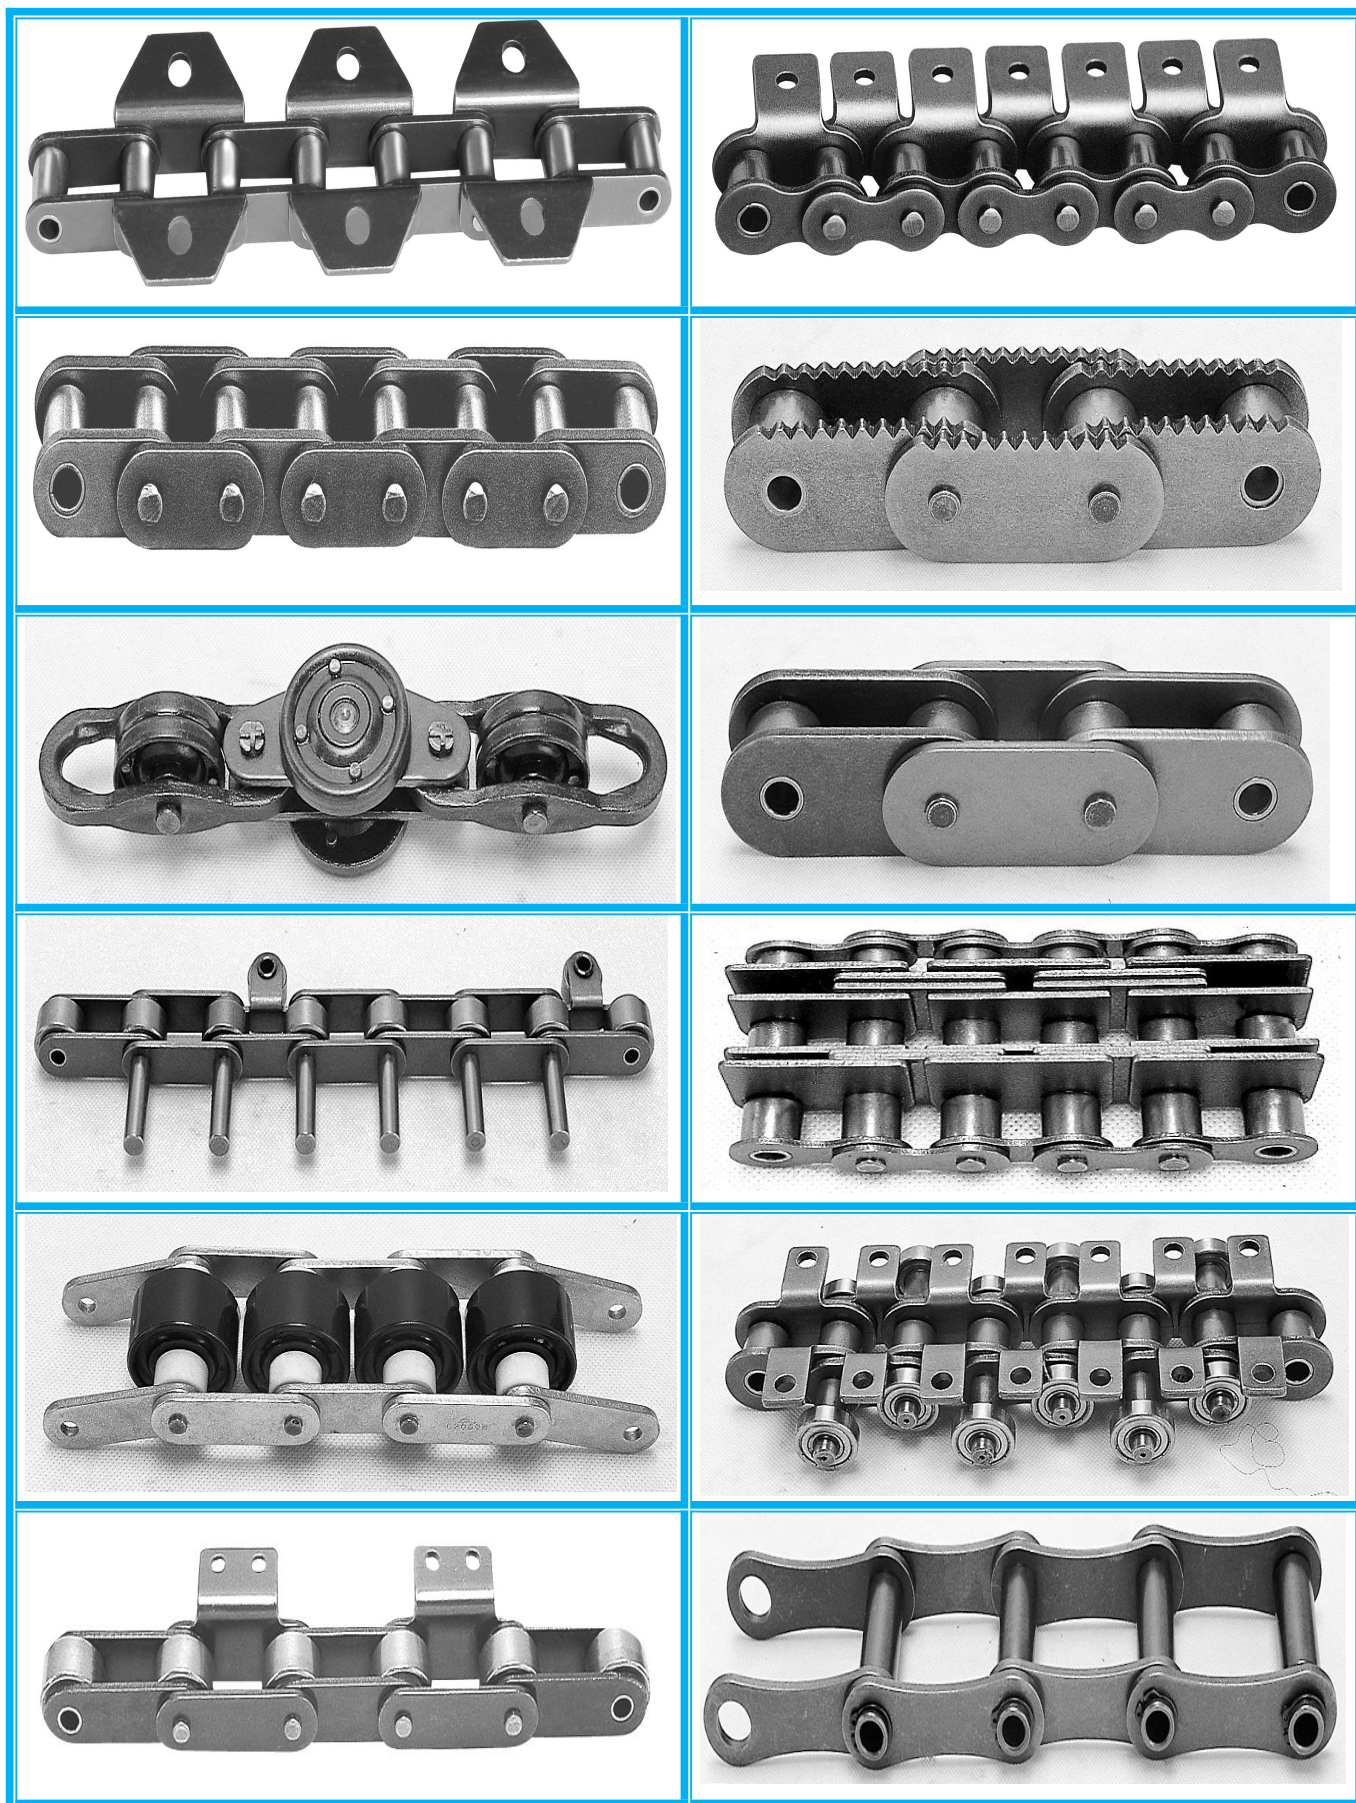

部分产品展示

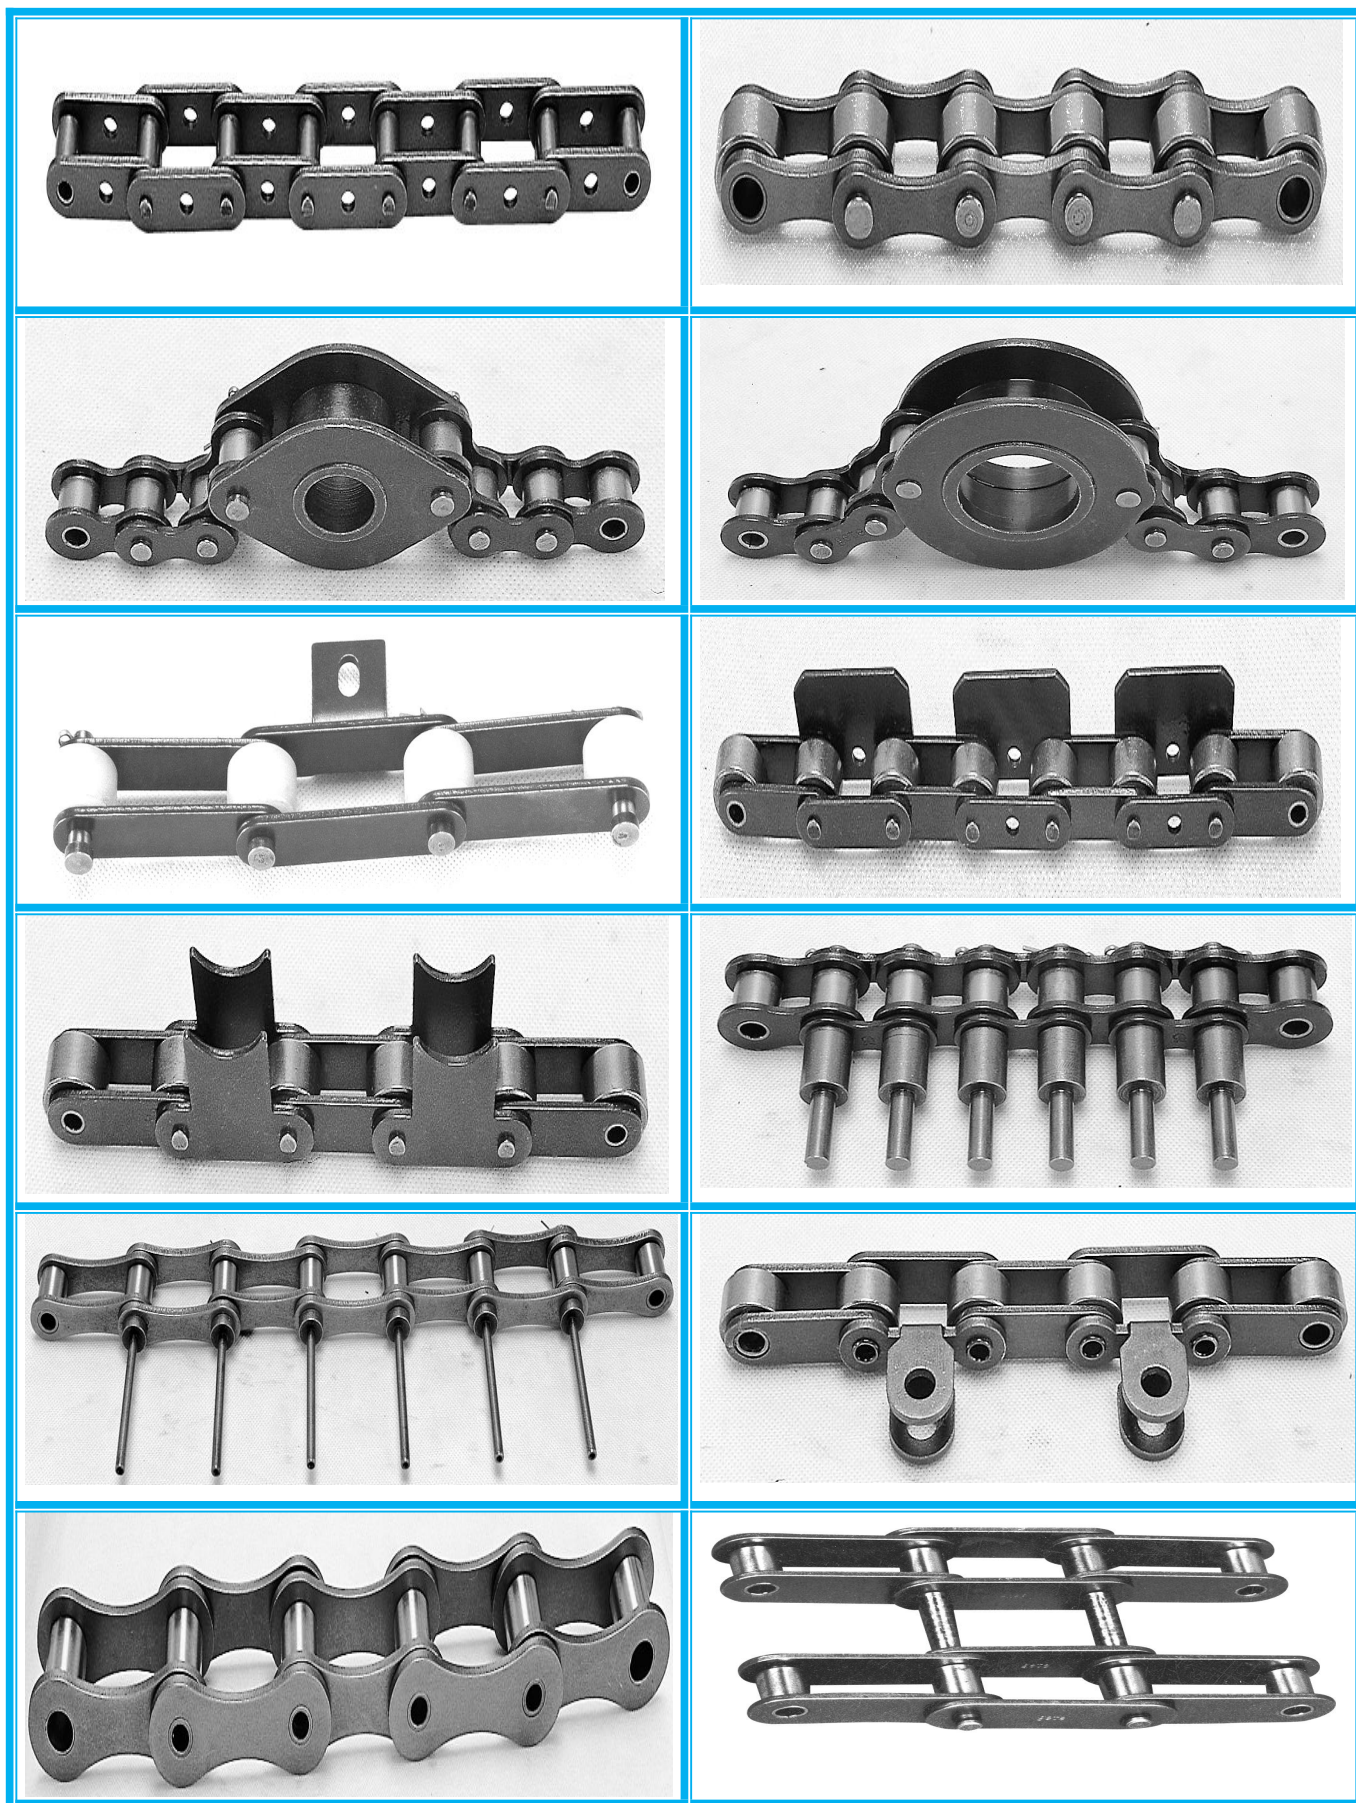

部分产品展示



部分产品展示



产品目录
Product List

A 系列短节距精密滚子链
Short pitch precision roller chains (A series) 1-3

B 系列短节距精密滚子链
Short pitch precision roller chains (B series) 4-6

重载系列滚子链
Heavy duty series roller chains 7-9

A 系列开口销型短节距精密滚子链
Cottered type short pitch precision roller chains (A series) 10-12

重载系列开口销型滚子链
Heavy duty series cottered type roller chains 13

A 系列直板滚子链
Roller chains with straight side plates (A series) 14

B 系列直板滚子链
Roller chains with straight side plates (B series) 15

短节距输送链附件
Short pitch conveyor chain attachments 16-19

短节距加长销输送链
Short pitch conveyor chains with extended pin 20

双节距输送链
Double pitch conveyor chains 21-22

双节距加长销输送链
Double pitch conveyor chains with extended pins 23

双节距输送链附件
Double pitch conveyor chain attachments 24-31

空心销轴链
Hollow pin chains 32-34

镀达克罗链
Corrosion resistant/Dacromet-plated chains 35

镀镍链
Corrosion resistant/Nickel-plated chains 36

镀锌链
Corrosion resistant/Zinc-plated chains 37

O 型密封圈链
O-Ring chains 38

产品目录
Product List

侧弯链
Side bow chains 39

带 U 型附件滚子链
Roller chains with U type attchments 40

橡胶链
Roller chains with vulcanised elastomer profiles 41-44

停车库链条
Car parking chains 45-47

板式链
Leaf chains 48-52

尖齿链
Sharp top chains 53-54

塑料链
Plastic chains 55-56

倍速链
Double plus chains 57-58

带顶滚轮短节距输送链
Short pitch conveyor chains with top rollers 59

带顶滚轮双节距输送链
Double pitch conveyor chains with top rollers 60

带侧滚轮输送链
Conveyor chains with outboard rollers 61-62

带大滚轮输送链
Conveyor chains with large roller 63-64

带特殊滚轮输送链
Conveyor chains with special rollers 65

带附板输送链
Conveyor chains with attachments 66-69

木材输送链及附件
Lumber conveyor chains & attachments 70

烟草输送链
Tobacco conveyor chains 71

纸卷用输送链
Conveyor chains for paper mill 72

产品目录
Product List

曳引用钢制焊接弯板链
Welded steel type cranked link drag chains 73

A 型 CA 型钢制农机链
A type CA type steel agricultural chains 74

CA 型钢制农机链
CA type steel agricultural chains 75-84

C 型钢制农机链附件
C type steel agricultural chain attachments 85-92

S 型钢制农机链
S type steel agricultural chains 93

ZGS38 联合收割机链及附件
ZGS38 combine chain with attachments 94-95

联合收割机链
Combine chains 96-97

水稻收割机链
Rice harvester chain 98-99


链传动维护保养
Maintenance For Roller Chain Drive 100-104

A 系列短节距精密滚子链

Short pitch precision roller chains (A series)

单排滚子链/套筒链

Simplex roller chains & bush chains

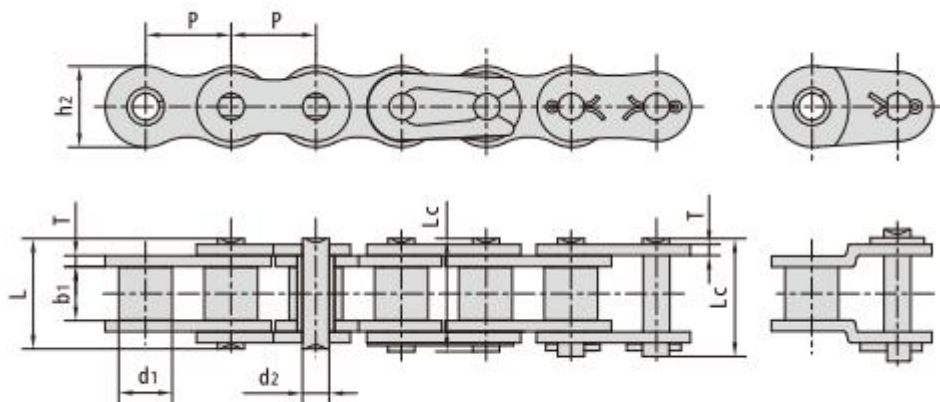

DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
		P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
*03C	*15	4.7625	2.48	2.38	1.62	6.10	6.90	4.30	0.60	1.80/409	2.0	0.08
*04C-1	*25	6.3500	3.30	3.18	2.31	7.90	8.40	6.00	0.80	3.50/795	4.6	0.15
*06C-1	*35	9.5250	5.08	4.77	3.58	12.40	13.17	9.00	1.30	7.90/1795	10.8	0.33
085-1	41	12.7000	7.77	6.25	3.58	13.75	15.00	9.91	1.30	6.67/1516	12.6	0.41
08A-1	40	12.7000	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.10/3205	17.5	0.62
10A-1	50	15.8750	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.20/5045	29.4	1.02
12A-1	60	19.0500	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.80/7227	41.5	1.50
16A-1	80	25.4000	15.88	15.75	7.92	32.70	35.00	24.00	3.25	56.70/12886	69.4	2.60
20A-1	100	31.7500	19.05	18.90	9.53	40.40	44.70	30.00	4.00	88.50/20114	109.2	3.91
24A-1	120	38.1000	22.23	25.22	11.10	50.30	54.30	35.70	4.80	127.00/28864	156.3	5.62
28A-1	140	44.4500	25.40	25.22	12.70	54.40	59.00	41.00	5.60	172.40/39182	212.0	7.50
32A-1	160	50.8000	28.58	31.55	14.27	64.80	69.60	47.80	6.40	226.80/51545	278.9	10.10
36A-1	180	57.1500	35.71	35.48	17.46	72.80	78.60	53.60	7.20	280.20/63682	341.8	13.45
40A-1	200	63.5000	39.68	37.85	19.85	80.30	87.20	60.00	8.00	353.80/80409	431.6	16.15
48A-1	240	76.2000	47.63	47.35	23.81	95.50	103.00	72.39	9.50	510.30/115977	622.5	23.20

*套筒链：表中滚子直径 d1 为套筒直径


*Bush chain: d1 in the table indicates the external diameter of the bush.

A 系列短节距精密滚子链

Short pitch precision roller chains (A series)

双排滚子链/套筒链

Duplex roller chains & bush chains

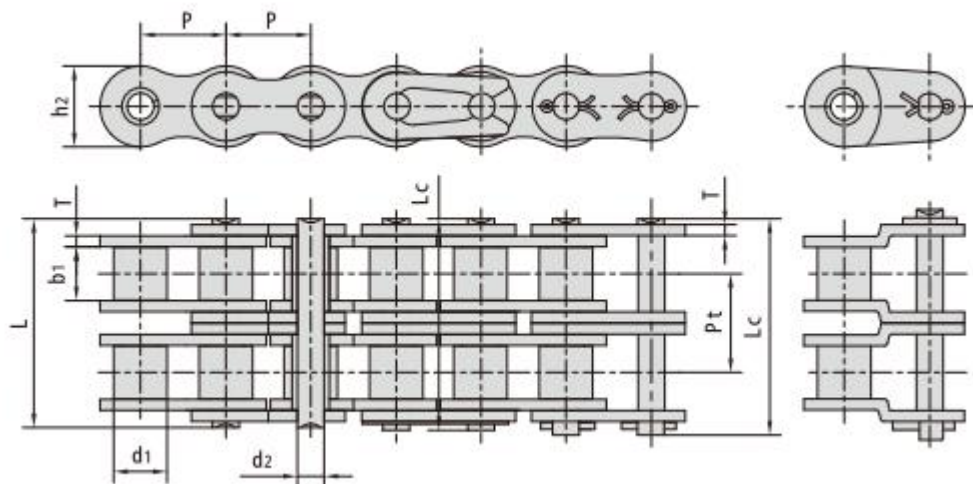

DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transvers e pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
		P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Pt	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
*04C-2	*25-2	6.350	3.30	3.18	2.31	14.5	15.0	6.00	0.80	6.40	7.00/1591	8.6	0.28
*06C-2	*35-2	9.525	5.08	4.77	3.58	22.5	23.3	9.00	1.30	10.13	15.80/3591	19.7	0.63
085-2	41-2	12.700	7.77	6.25	3.58	25.7	26.9	9.91	1.30	11.95	13.34/3032	16.9	0.81
08A-2	40-2	12.700	7.95	7.85	3.96	31.0	32.2	12.00	1.50	14.38	28.20/6409	35.9	1.12
10A-2	50-2	15.875	10.16	9.40	5.08	38.9	40.4	15.09	2.03	18.11	44.40/10091	58.1	2.00
12A-2	60-2	19.050	11.91	12.57	5.94	48.8	50.5	18.00	2.42	22.78	63.60/14455	82.1	2.92
16A-2	80-2	25.400	15.88	15.75	7.92	62.7	64.3	24.00	3.25	29.29	113.40/25773	141.8	5.15
20A-2	100-2	31.750	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	177.00/40227	219.4	7.80
24A-2	120-2	38.100	22.23	25.22	11.10	95.8	99.7	35.70	4.80	45.44	254.00/57727	314.9	11.70
28A-2	140-2	44.450	25.40	25.22	12.70	103.3	107.9	41.00	5.60	48.87	344.80/78364	427.5	15.14
32A-2	160-2	50.800	28.58	31.55	14.27	123.3	128.1	47.80	6.40	58.55	453.60/103091	562.4	20.14
36A-2	180-2	57.150	35.71	35.48	17.46	138.6	144.4	53.60	7.20	65.84	560.50/127386	695.0	29.22
40A-2	200-2	63.500	39.68	37.85	19.85	151.9	158.8	60.00	8.00	71.55	707.60/160818	877.4	32.24
48A-2	240-2	76.200	47.63	47.35	23.81	183.4	190.8	72.39	9.50	87.83	1020.60/213955	1255.3	45.23

*套筒链：表中滚子直径 d1 为套筒直径


*Bush chain: d1 in the table indicates the external diameter of the bush.

A 系列短节距精密滚子链

Short pitch precision roller chains (A series)

三排滚子链/套筒链

Triplex roller chains & bush chains

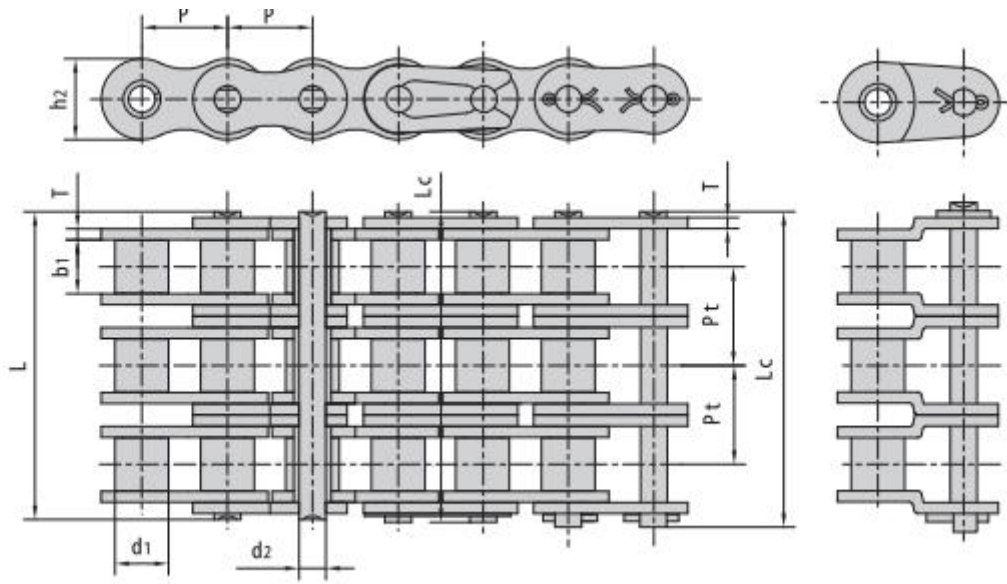

DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transvers e pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
		P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Pt	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
*04C-3	*25-3	6.350	3.30	3.18	2.31	21.0	21.5	6.00	0.80	6.40	10.5/2386	15.0	0.44
*06C-3	*35-3	9.525	5.08	4.77	3.58	32.7	33.5	9.00	1.30	10.13	23.7/5386	33.9	1.05
08A-3	40-3	12.700	7.95	7.85	3.96	45.4	46.6	12.00	1.50	14.38	42.3/9614	55.8	1.90
10A-3	50-3	15.875	10.16	9.40	5.08	57.0	58.5	15.09	2.03	18.11	66.6/15136	93.9	3.09
12A-3	60-3	19.050	11.91	12.57	5.94	71.5	73.3	18.00	2.42	22.78	95.4/21682	129.6	4.54
16A-3	80-3	25.400	15.88	15.75	7.92	91.7	93.6	24.00	3.25	29.29	170.1/38659	222.9	7.89
20A-3	100-3	31.750	19.05	18.90	9.53	112.2	116.3	30.00	4.00	35.76	265.5/60341	322.8	11.77
24A-3	120-3	38.100	22.23	25.22	11.10	141.4	145.2	35.70	4.80	45.44	381.0/86591	489.3	17.53
28A-3	140-3	44.450	25.40	25.22	12.70	152.2	156.8	41.00	5.60	48.87	517.2/117545	667.5	22.20
32A-3	160-3	50.800	28.58	31.55	14.27	181.8	186.6	47.80	6.40	58.55	680.4/154636	800.7	30.02
36A-3	180-3	57.150	35.71	35.48	17.46	204.4	210.2	53.60	7.20	65.84	840.7/191068	1083.3	38.22
40A-3	200-3	63.500	39.68	37.85	19.85	223.5	230.4	60.00	8.00	71.55	1061.4/241227	1400.4	49.03
48A-3	240-3	76.200	47.63	47.35	23.81	271.3	278.6	72.39	9.50	87.83	1530.9/347932	2014.8	71.60

*套筒链：表中滚子直径 d1 为套筒直径


*Bush chain: d1 in the table indicates the external diameter of the bush.

B 系列短节距精密滚子链

Short pitch precision roller chains (B series)

单排滚子链

Simplex roller chains

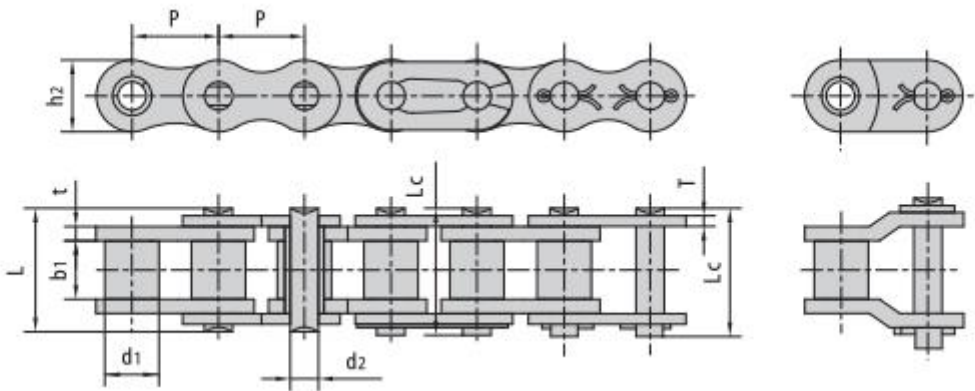

DIN/ISO 链号 DIN/ISO Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/ bf	kN	kg/m
05B-1	8.000	5.00	3.00	2.31	8.20	8.9	7.10	0.80	5.0/1136	5.9	0.20
*06B-1	9.525	6.35	5.72	3.28	13.15	14.1	8.20	1.30	9.0/2045	10.4	0.41
08B-1	12.700	8.51	7.75	4.45	16.70	18.2	11.80	1.60	18.0/4091	19.4	0.69
10B-1	15.875	10.16	9.65	5.08	19.50	20.9	14.70	1.70	22.4/5091	27.5	0.93
12B-1	19.050	12.07	11.68	5.72	22.50	24.2	16.00	1.85	29.0/6591	32.2	1.15
16B-1	25.400	15.88	17.02	8.28	36.10	37.4	21.00	4.15/3.1	60.0/13636	77.1	2.71
20B-1	31.750	19.05	19.56	10.19	41.30	45.0	26.40	4.50/3.5	95.0/21591	112.8	3.70
24B-1	38.100	25.40	25.40	14.63	53.40	57.8	33.20	6.00/4.8	160.0/36364	178.0	7.10
28B-1	44.450	27.94	30.99	15.90	65.10	69.5	36.70	7.50/6.0	200.0/45455	236.4	8.50
32B-1	50.800	29.21	30.99	17.81	66.00	71.0	42.00	7.00/6.0	250.0/56818	277.5	10.25
40B-1	63.500	39.37	38.10	22.89	82.20	89.2	52.96	8.50/8.0	355.0/80862	394.0	16.35
48B-1	76.200	48.26	45.72	29.24	99.10	107.0	63.80	12.00/10.0	560.0/127272	621.6	25.00

*直链板


*Straight side plates

B 系列短节距精密滚子链

Short pitch precision roller chains (B series)

双排滚子链

Duplex roller chains

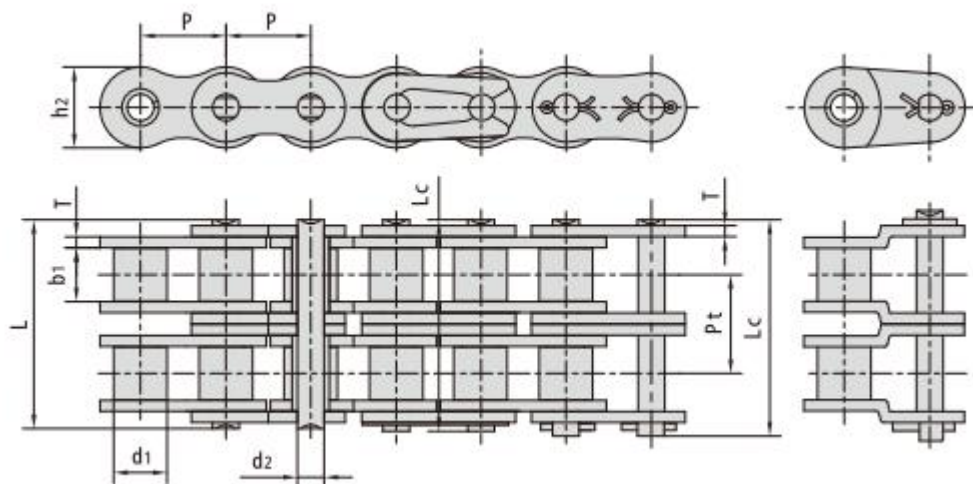

DIN/ISO 链号 DIN/ISO Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Pt	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/ bf	kN	kg/m
05B-2	8.000	5.00	3.00	2.31	13.9	14.5	7.10	0.80	5.64	7.8/1773	10.2	0.33
*06B-2	9.525	6.35	5.72	3.28	23.4	24.4	8.20	1.30	10.24	16.9/3841	18.7	0.77
08B-2	12.700	8.51	7.75	4.45	31.0	32.2	11.80	1.60	13.92	32.0/7273	38.7	1.34
10B-2	15.875	10.16	9.65	5.08	36.1	37.5	14.70	1.70	16.59	44.5/10114	56.2	1.84
12B-2	19.050	12.07	11.68	5.72	42.0	43.6	16.00	1.85	19.46	57.8/13136	66.1	2.31
16B-2	25.400	15.88	17.02	8.28	68.0	69.3	21.00	4.15/3.1	31.88	106.0/24091	133.0	5.42
20B-2	31.750	19.05	19.56	10.19	77.8	81.5	26.40	4.50/3.5	36.45	170.0/38636	211.2	7.20
24B-2	38.100	25.40	25.40	14.63	101.7	106.2	33.20	6.00/4.8	48.36	280.0/63636	319.2	13.40
28B-2	44.450	27.94	30.99	15.90	124.6	129.1	36.70	7.50/6.0	59.56	360.0/81818	406.8	16.60
32B-2	50.800	29.21	30.99	17.81	124.6	129.6	42.00	7.00/6.0	58.55	450.0/102273	508.5	21.00
40B-2	63.500	39.37	38.10	22.89	154.5	161.5	52.96	8.50/8.0	72.29	630.0/143182	711.9	32.00
48B-2	76.200	48.26	45.72	29.24	190.4	198.2	63.80	12.00/10.0	91.21	1000.0/227272	1130.0	50.00

*直链板


*Straight side plates

B 系列短节距精密滚子链

Short pitch precision roller chains (B series)

三排滚子链

Triplex roller chains

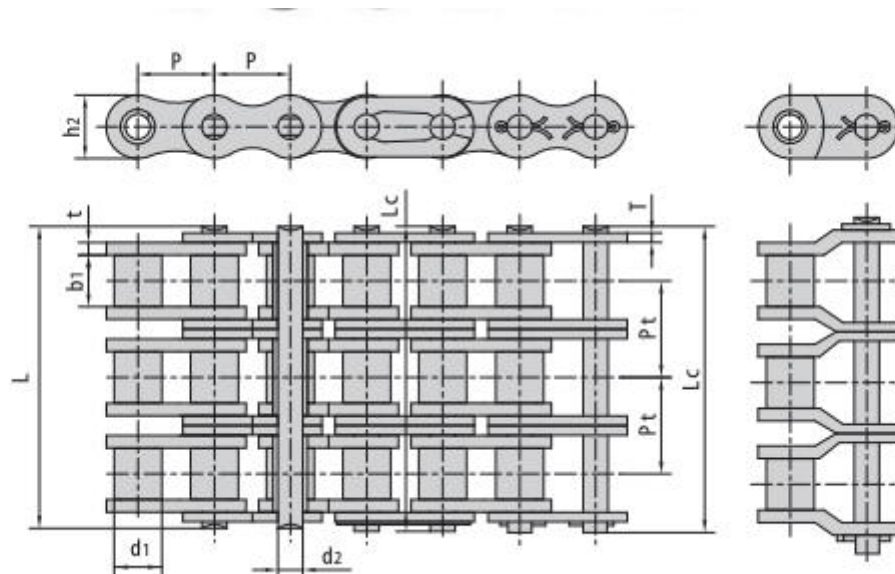

DIN/ISO 链号 DIN/ISO Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	t/T max	P _t	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
05B-3	8.000	5.00	3.00	2.31	19.5	20.2	7.10	0.80	5.64	11.1/2523	13.8	0.48
*06B-3	9.525	6.35	5.72	3.28	33.5	34.6	8.20	1.30	10.24	24.9/5659	30.1	1.16
08B-3	12.700	8.51	7.75	4.45	45.1	46.1	11.80	1.60	13.92	47.5/10795	57.8	2.03
10B-3	15.875	10.16	9.65	5.08	52.7	54.1	14.70	1.70	16.59	66.7/15159	84.5	2.77
12B-3	19.050	12.07	11.68	5.72	61.5	63.1	16.00	1.85	19.46	86.7/19705	101.8	3.46
16B-3	25.400	15.88	17.02	8.28	99.8	101.2	21.00	4.15/3.10	31.88	160.0/36364	203.7	8.13
20B-3	31.750	19.05	19.56	10.19	114.2	117.9	26.40	4.50/3.50	36.45	250.0/56818	290.0	10.82
24B-3	38.100	25.40	25.40	14.63	150.1	154.6	33.20	6.00/4.80	48.36	425.0/96591	493.0	20.10
28B-3	44.450	27.94	30.99	15.90	184.2	188.7	36.70	7.50/6.00	59.56	530.0/120454	609.5	24.92
32B-3	50.800	29.21	30.99	17.81	183.2	188.2	42.00	7.00/6.00	58.55	670.0/152273	770.5	31.56
40B-3	63.500	39.37	38.10	22.89	226.8	233.8	52.96	8.50/8.00	72.29	950.0/215909	1092.5	48.10
48B-3	76.200	48.26	45.72	29.24	281.6	289.4	63.80	12.00/10.00	91.21	1500.0/340909	1710.0	75.00

*直链板


*Straight side plates

重载系列滚子链

Heavy duty series roller chains

单排滚子链/套筒链

Simplex roller chains & bush chains

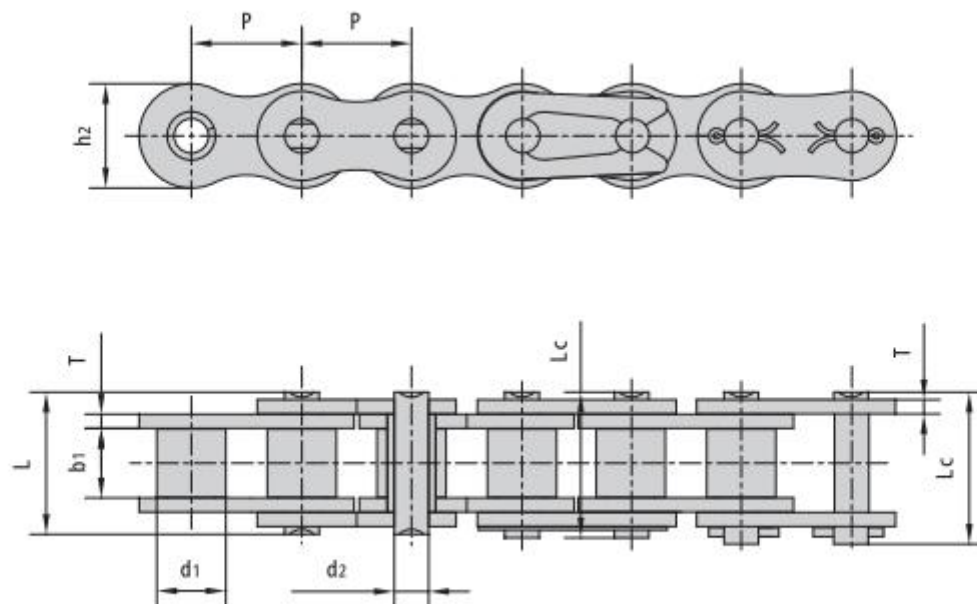

ANSI/ISO 链号 ANSI/ISO Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	极限拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
*35H-1	9.525	5.08	4.77	3.58	13.3	14.3	9.00	1.50	7.9/1795	10.8	0.41
40H-1	12.700	7.95	7.85	3.96	18.8	19.9	12.00	2.03	14.1/3205	19.1	0.82
50H-1	15.875	10.16	9.40	5.08	22.1	23.4	15.09	2.42	22.2/5045	30.2	1.25
60H-1	19.050	11.91	12.57	5.94	29.2	31.0	18.00	3.25	31.8/7227	42.7	1.87
80H-1	25.400	15.88	15.75	7.92	36.2	37.7	24.00	4.00	56.7/12886	71.4	3.10
100H-1	31.750	19.05	18.90	9.53	43.6	46.9	30.00	4.80	88.5/20114	112.4	4.52
120H-1	38.100	22.23	25.22	11.10	53.5	57.5	35.70	5.60	127.0/28864	160.9	6.60
140H-1	44.450	25.40	25.22	12.70	57.6	62.2	41.00	6.40	172.4/39182	217.3	8.30
160H-1	50.800	28.58	31.55	14.27	68.2	73.0	47.80	7.20	226.8/51545	285.8	10.30
180H-1	57.150	35.71	35.48	17.46	75.9	81.6	53.60	8.00	281.0/63863	341.8	14.83
200H-1	63.500	39.68	37.85	19.85	86.6	93.5	60.00	9.50	353.8/80409	444.5	19.16
240H-1	76.200	47.63	47.35	23.81	109.6	115.9	72.30	12.70	510.3/115977	622.5	30.40

*套筒链：表中滚子直径 d1 为套筒直径


*Bush chain: d1 in the table

重载系列滚子链

Heavy duty series roller chains

双排滚子链

Duplex roller chains

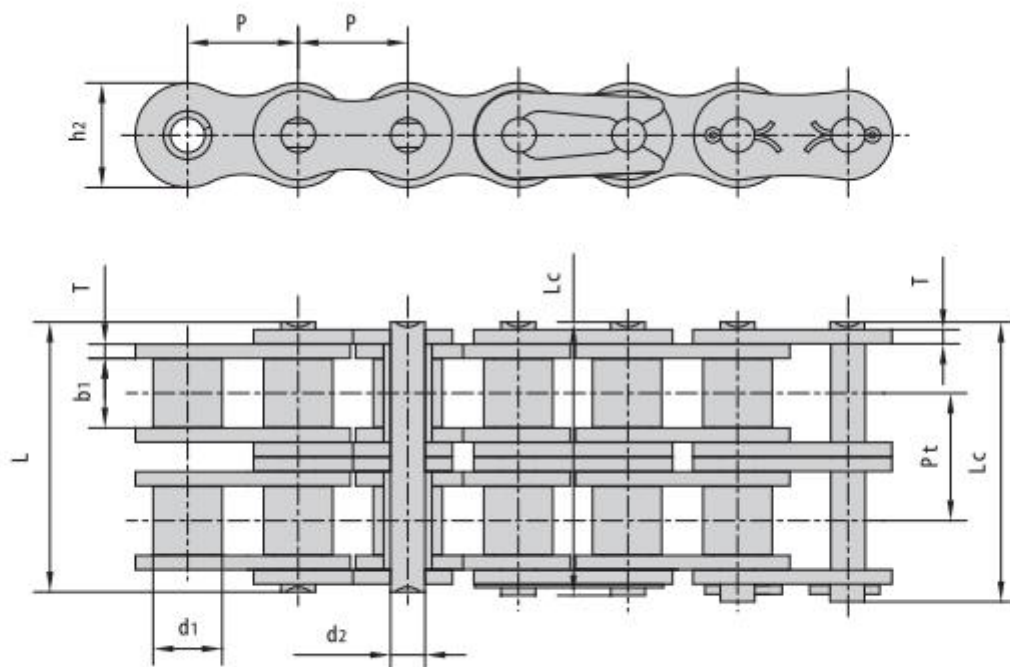


ANSI/ISO 链号 ANSI/ISO Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	P _t	Q min	Q ₀	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
60H-2	19.050	11.91	12.57	5.94	55.3	57.1	18.00	3.25	26.11	63.6/14455	84.5	3.71
80H-2	25.400	15.88	15.75	7.92	68.8	70.3	24.00	4.00	32.59	113.4/25773	145.3	6.15
100H-2	31.750	19.05	18.90	9.53	82.7	86.0	30.00	4.80	39.09	177.0/40227	225.9	9.03
120H-2	38.100	22.23	25.22	11.10	102.4	106.4	35.70	5.60	48.87	254.0/57727	322.7	13.13
140H-2	44.450	25.40	25.22	12.70	109.8	114.4	41.00	6.40	52.20	344.8/78364	437.7	16.60
160H-2	50.800	28.58	31.55	14.27	130.1	134.9	47.80	7.20	61.90	453.6/103091	571.6	20.20
180H-2	57.150	35.71	35.48	17.46	146.5	155.6	53.60	8.00	69.16	562/127726	680.0	29.20
200H-2	63.500	39.68	37.85	19.85	164.9	171.8	60.00	9.50	78.31	707.6/160818	894.9	38.11
240H-2	76.200	47.63	47.35	23.81	212.6	223.1	72.30	12.70	101.22	1000/227270	1200.0	60.50

重载系列滚子链

Heavy duty series roller chains

三排滚子链

Triplex roller chains

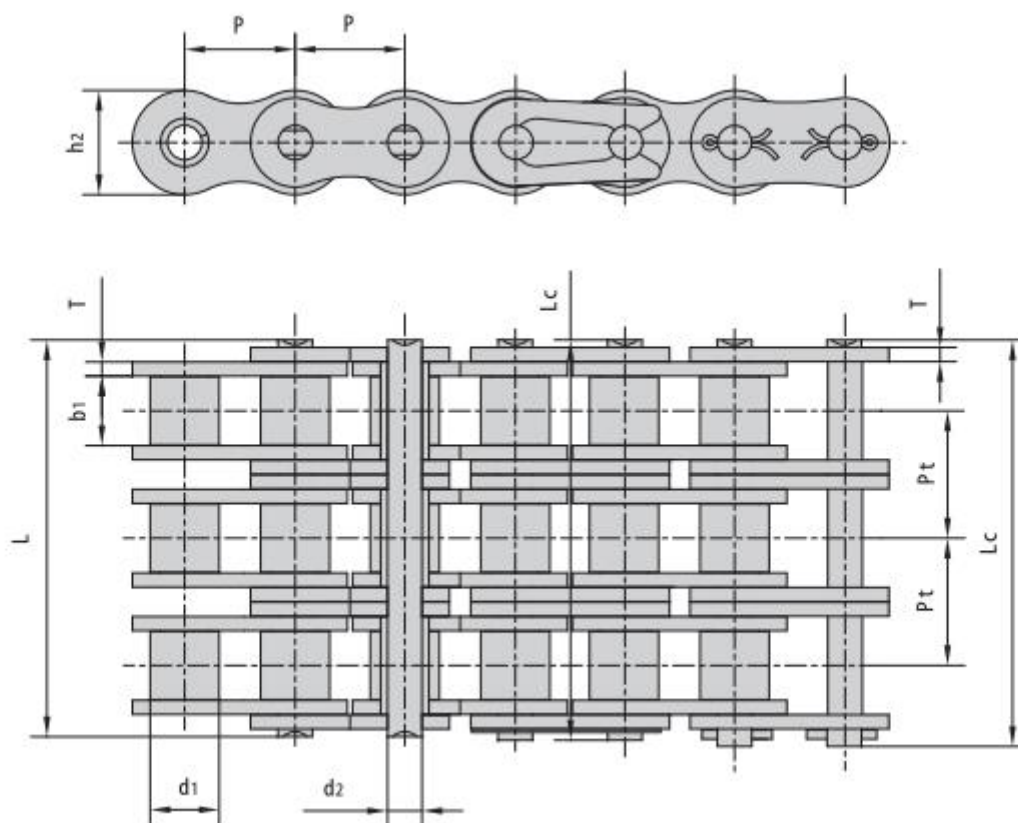


ANSI/ISO 链号 ANSI/ISO Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Pt	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
60H-3	19.050	11.91	12.57	5.94	81.4	83.2	18.00	3.25	26.11	95.4/21682	113.9	5.54
80H-3	25.400	15.88	15.75	7.92	101.4	102.9	24.00	4.00	32.59	170.1/38659	203.5	9.42
100H-3	31.750	19.05	18.90	9.53	121.8	125.1	30.00	4.80	39.09	265.5/60341	314.8	12.96
120H-3	38.100	22.23	25.22	11.10	151.2	155.2	35.70	5.60	48.87	381.0/86591	444.7	19.64
140H-3	44.450	25.40	25.22	12.70	162.0	166.6	41.00	6.40	52.20	517.2/117545	598.4	24.90
160H-3	50.800	28.58	31.55	14.27	192.0	196.8	47.80	7.20	61.90	680.4/154636	787.3	30.10
180H-3	57.150	35.71	35.48	17.46	215.7	224.8	53.60	8.00	69.16	843/191589	1011.0	44.10
200H-3	63.500	39.68	37.85	19.85	243.2	250.1	60.00	9.50	78.31	1061.4/241227	1228.2	57.06
240H-3	76.200	47.63	47.35	23.81	313.8	324.3	72.30	12.70	101.22	1500/340905	1650.0	91.00

A 系列开口销型短节距精密滚子链

Cottered type short pitch precision roller chains (A series)

单排精密滚子链

Simplex precisian roller chains

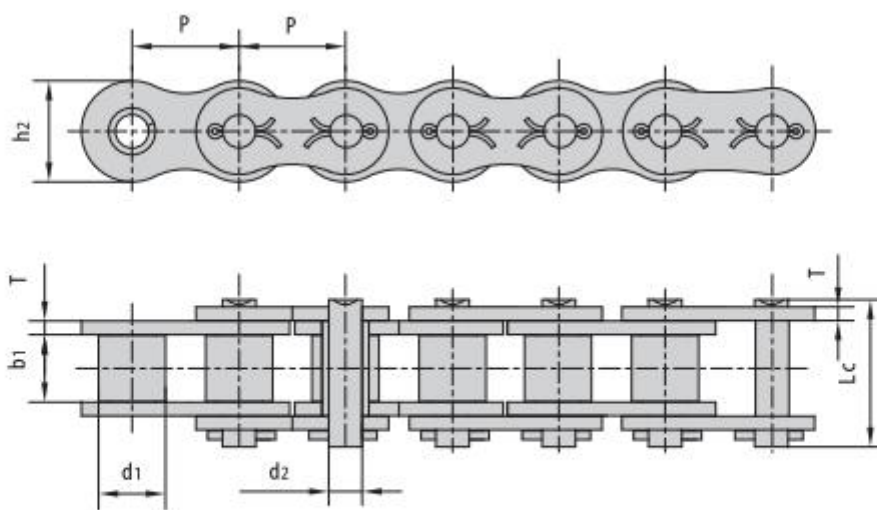


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
		P	d1 max	b1 min	d2 max	Lc max	h2 max	T max	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
10A-1	50-1	15.875	10.16	9.40	5.08	23.3	15.09	2.03	22.2/5045	29.4	1.02
12A-1	60-1	19.050	11.91	12.57	5.94	28.3	18.00	2.42	31.8/7227	41.5	1.50
16A-1	80-1	25.400	15.88	15.75	7.92	36.5	24.00	3.25	56.7/12886	69.4	2.60
20A-1	100-1	31.750	19.05	18.90	9.53	44.7	30.00	4.00	88.5/20114	109.2	3.91
24A-1	120-1	38.100	22.23	25.22	11.10	54.3	35.70	4.80	127.0/28864	156.3	5.62
28A-1	140-1	44.450	25.40	25.22	12.70	59.0	41.00	5.60	172.4/39182	212.0	7.50
32A-1	160-1	50.800	28.58	31.55	14.27	69.6	47.80	6.40	226.8/51545	278.9	10.10
36A-1	180-1	57.150	35.71	35.48	17.46	78.6	53.60	7.20	280.2/63682	341.8	13.45
40A-1	200-1	63.500	39.68	37.85	19.85	87.2	60.00	8.00	353.8/80409	431.6	16.15
48A-1	240-1	76.200	47.63	47.35	23.81	103.0	72.39	9.50	510.3/115977	622.5	23.20

A 系列开口销型短节距精密滚子链

Cottered type short pitch precision roller chains (A series)

双排精密滚子链

Duplex precision roller chains

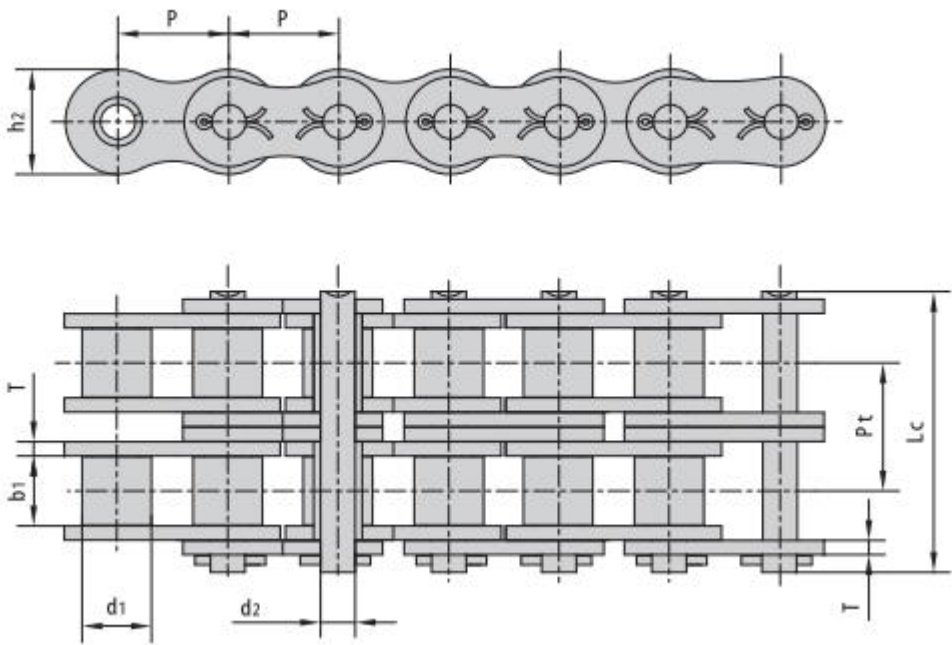


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长 度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载 荷 Average tensile strength	每米长重 Weight per meter
		P	d1 max	b1 min	d2 max	Lc max	h2 max	T max	Pt	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN/ bf	kN	kg/m
10A-2	50-2	15.875	10.16	9.40	5.08	41.2	15.09	2.03	18.11	44.4/10091	58.1	2.00
12A-2	60-2	19.050	11.91	12.57	5.94	51.1	18.00	2.42	22.78	63.6/14455	82.1	2.92
16A-2	80-2	25.400	15.88	15.75	7.92	65.8	24.00	3.25	29.29	113.4/25773	141.8	5.15
20A-2	100-2	31.750	19.05	18.90	9.53	80.5	30.00	4.00	35.76	177.0/40227	219.4	7.80
24A-2	120-2	38.100	22.23	25.22	11.10	99.7	35.70	4.80	45.44	254.0/57727	314.9	11.70
28A-2	140-2	44.450	25.40	25.22	12.70	107.9	41.00	5.60	48.87	344.8/78364	427.5	15.14
32A-2	160-2	50.800	28.58	31.55	14.27	128.1	47.80	6.40	58.55	453.6/103091	562.4	20.14
36A-2	180-2	57.150	35.71	35.48	17.46	144.4	53.60	7.20	65.84	560.5/127386	695.0	29.22
40A-2	200-2	63.500	39.68	37.85	19.85	158.8	60.00	8.00	71.55	707.6/160818	877.4	32.24
48A-2	240-2	76.200	47.63	47.35	23.81	190.8	72.39	9.50	87.83	1020.6/231955	1255.3	45.23

A 系列开口销型短节距精密滚子链

Cottered type short pitch precision roller chains (A series)

三排精密滚子链

Triplex precision roller chains

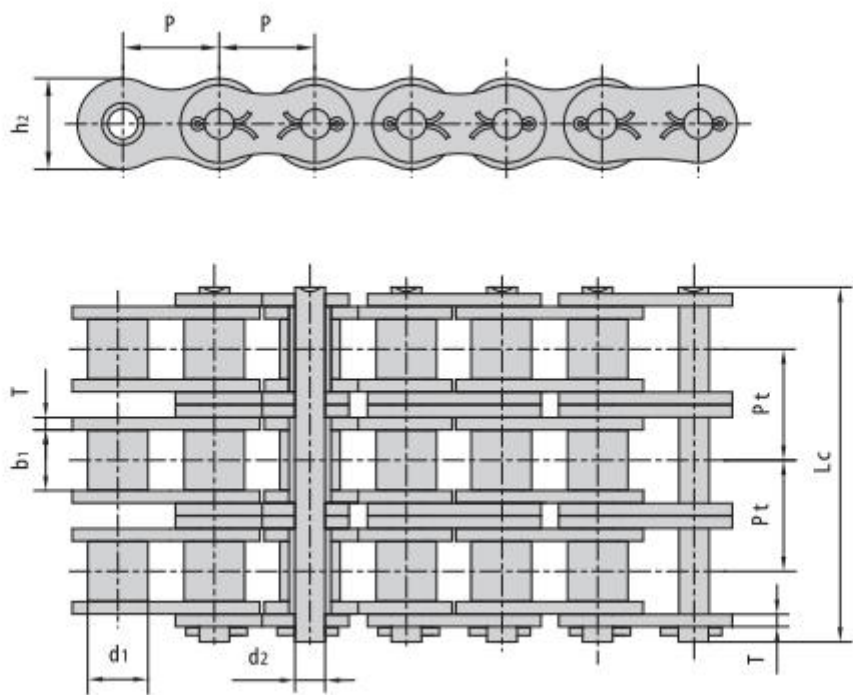


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长 度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载 荷 Average tensile strength	每米长重 Weight per meter
		P	d1 max	b1 min	d2 max	Lc max	h2 max	T max	Pt	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
10A-3	50-3	15.875	10.16	9.40	5.08	59.3	15.09	2.03	18.11	66.6/15136	77.8	3.09
12A-3	60-3	19.050	11.91	12.57	5.94	73.9	18.00	2.42	22.78	95.4/21682	111.1	4.54
16A-3	80-3	25.400	15.88	15.75	7.92	95.1	24.00	3.25	29.29	170.1/38659	198.4	7.89
20A-3	100-3	31.750	19.05	18.90	9.53	116.3	30.00	4.00	35.76	265.5/60341	309.6	11.77
24A-3	120-3	38.100	22.23	25.22	11.10	145.2	35.70	4.80	45.44	381.0/86591	437.2	17.53
28A-3	140-3	44.450	25.40	25.22	12.70	156.8	41.00	5.60	48.87	517.2/117545	593.3	22.20
32A-3	160-3	50.800	28.58	31.55	14.27	186.6	47.80	6.40	58.55	680.4/154636	780.6	30.02
36A-3	180-3	57.150	35.71	35.48	17.46	210.2	53.60	7.20	65.84	840.7/191068	983.6	38.22
40A-3	200-3	63.500	39.68	37.85	19.85	230.4	60.00	8.00	71.55	1061.4/241227	1217.8	49.03
48A-3	240-3	76.200	47.63	47.35	23.81	278.6	72.39	9.50	87.83	1530.9/347932	1756.5	71.60

重载系列开口销型滚子链

Heavy duty series cottered type roller chains

单排、双排、三排


Simplex, Duplex & Triplex strands

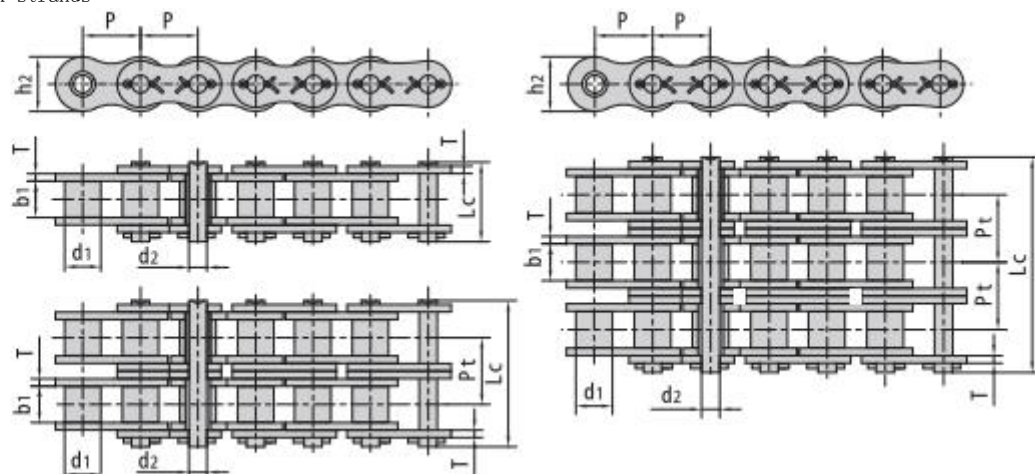

ANSI/ISO 链号 ANSI/ISO No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	Lc max	h2 max	T max	Pt	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
50H-1	15.875	10.16	9.40	5.08	24.4	15.09	2.42	-	22.2/5045	30.2	1.25
60H-1	19.050	11.91	12.57	5.94	31.6	18.00	3.25	-	31.8/7227	42.7	1.87
80H-1	25.400	15.88	15.75	7.92	39.4	24.00	4.00	-	56.7/12886	71.4	3.10
100H-1	31.750	19.05	18.90	9.53	46.9	30.00	4.80	-	88.5/20114	112.4	4.52
120H-1	38.100	22.23	25.22	11.10	57.5	35.70	5.60	-	127.0/28864	160.9	6.60
140H-1	44.450	25.40	25.22	12.70	62.2	41.00	6.40	-	172.4/39182	217.3	8.30
160H-1	50.800	28.58	31.55	14.27	73.0	47.80	7.20	-	226.8/51545	285.8	10.30
180H-1	57.150	35.71	35.48	17.46	81.6	53.60	8.00	-	281.0/63863	341.8	14.83
200H-1	63.500	39.68	37.85	19.85	93.5	60.00	9.50	-	353.8/80409	444.5	19.16
60H-2	19.050	11.91	12.57	5.94	57.7	18.00	3.25	26.11	63.6/14454	84.5	3.71
80H-2	25.400	15.88	15.75	7.92	72.0	24.00	4.00	32.59	113.4/25773	145.3	6.15
100H-2	31.750	19.05	18.90	9.53	86.0	30.00	4.80	39.09	177.0/40227	225.9	9.03
120H-2	38.100	22.23	25.22	11.10	106.4	35.70	5.60	48.87	254.0/57727	322.7	13.13
140H-2	44.450	25.40	25.22	12.70	114.4	41.00	6.40	52.20	344.8/78364	437.7	16.60
160H-2	50.800	28.58	31.55	14.27	134.9	47.80	7.20	61.90	453.6/103091	571.6	20.20
180H-2	57.150	35.71	35.48	17.46	150.8	53.60	8.00	69.16	562.0/127726	680.0	29.20
200H-2	63.500	39.68	37.85	19.85	171.8	60.00	9.50	78.31	707.6/160818	894.9	38.11
60H-3	19.050	11.91	12.57	5.94	83.8	18.00	3.25	26.11	95.4/21682	113.9	5.54
80H-3	25.400	15.88	15.75	7.92	104.6	24.00	4.00	32.59	170.1/38659	203.5	9.42
100H-3	31.750	19.05	18.90	9.53	125.1	30.00	4.80	39.09	265.5/60341	314.8	12.96
120H-3	38.100	22.23	25.22	11.10	155.2	35.70	5.60	48.87	381.0/86591	444.7	19.64
140H-3	44.450	25.40	25.22	12.70	166.6	41.00	6.40	52.20	517.2/117545	598.4	24.90
160H-3	50.800	28.58	31.55	14.27	196.8	47.80	7.20	61.90	680.4/154636	787.3	30.10
180H-3	57.150	35.71	35.48	17.46	220.0	53.60	8.00	69.16	843.0/191589	1011.0	44.10
200H-3	63.500	39.68	37.85	19.85	250.1	60.00	9.50	78.31	1061.4/241227	1228.2	57.06

A 系列直板滚子链


Roller chains with straight side plates (A series)

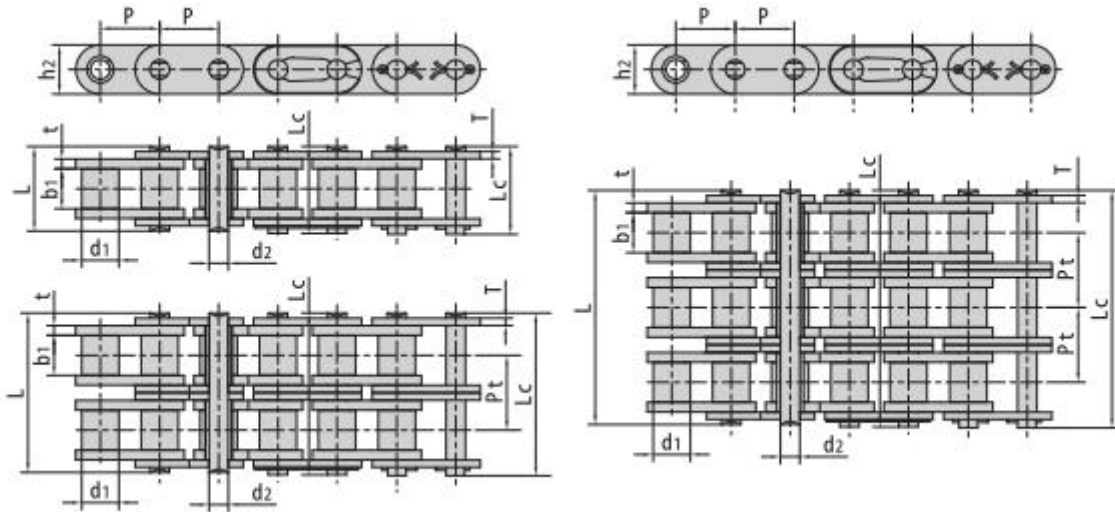

链号		节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transvers e pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
		P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Pt	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
C08A-1	C40-1	12.700	7.95	7.85	3.96	16.60	18.8	12.00	1.50	-	14.1/3273	17.5	0.73
C10A-1	C50-1	15.875	10.16	9.40	5.08	20.70	23.3	15.09	2.03	-	22.2/5045	29.4	1.23
C12A-1	C60-1	19.050	11.91	12.57	5.94	25.90	28.3	18.0/18.2	2.42	-	31.8/7227	41.5	1.81/1.83
C16A-1	C80-1	25.400	15.88	15.75	7.92	32.70	36.5	24.00	3.25	-	56.7/12886	69.4	3.09
C20A-1	C100-1	31.750	19.05	18.90	9.53	40.40	44.7	30.00	4.00	-	88.5/20114	109.2	4.56
C24A-1	C120-1	38.100	22.23	25.22	11.10	50.30	54.3	35.70	4.80	-	127.0/28864	156.3	6.86
C28A-1	C140-1	44.450	25.40	25.22	12.70	54.40	59.0	41.00	5.60	-	172.4/39182	212.0	8.49
C32A-1	C160-1	50.800	28.58	31.55	14.27	64.80	69.6	47.80	6.40	-	226.8/51545	278.9	11.50
C08A-2	C40-2	12.700	7.95	7.85	3.96	31.0	33.2	12.00	1.50	14.38	28.2/6409	35.9	1.43
C10A-2	C50-2	15.875	10.16	9.40	5.08	38.9	41.4	15.09	2.03	18.11	44.4/10091	58.1	2.42
C12A-2	C60-2	19.050	11.91	12.57	5.94	48.8	51.1	18.0/18.2	2.42	22.78	63.6/14455	82.1	3.58/3.62
C16A-2	C80-2	25.400	15.88	15.75	7.92	62.7	65.8	24.00	3.25	29.29	113.4/25773	141.8	6.12
C20A-2	C100-2	31.750	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	177.0/40227	219.4	9.08
C24A-2	C120-2	38.100	22.23	25.22	11.10	95.8	99.7	35.70	4.80	45.44	254.0/57727	314.9	13.60
C28A-2	C140-2	44.450	25.40	25.22	12.70	103.3	107.9	41.00	5.60	48.87	344.8/78364	427.5	16.86
C32A-2	C160-2	50.800	28.58	31.55	14.27	123.3	128.1	47.80	6.40	58.55	453.6/103091	562.4	22.90
C08A-3	C40-3	12.700	7.95	7.85	3.96	45.4	47.6	12.00	1.50	14.38	42.3/9614	50.0	2.14
C10A-3	C50-3	15.875	10.16	9.40	5.08	57.0	59.5	15.09	2.03	18.11	66.6/15136	77.8	3.62
C12A-3	C60-3	19.050	11.91	12.57	5.94	71.5	73.9	18.0/18.2	2.42	22.78	95.4/21682	111.1	5.36/5.41
C16A-3	C80-3	25.400	15.88	15.75	7.92	91.7	95.1	24.00	3.25	29.29	170.1/38659	198.4	9.10
C20A-3	C100-3	31.750	19.05	18.90	9.53	112.2	116.3	30.00	4.00	35.76	265.5/60341	309.6	13.60
C24A-3	C120-3	38.100	22.23	25.22	11.10	141.4	145.2	35.70	4.80	45.44	381.0/86591	437.2	20.43
C28A-3	C140-3	44.450	25.40	25.22	12.70	152.2	156.8	41.00	5.60	48.87	517.2/117545	593.3	25.23
C32A-3	C160-3	50.800	28.58	31.55	14.27	181.8	186.6	47.80	6.40	58.55	680.4/154636	780.6	34.19

B 系列直板滚子链


Roller chains with straight side plates (B series)

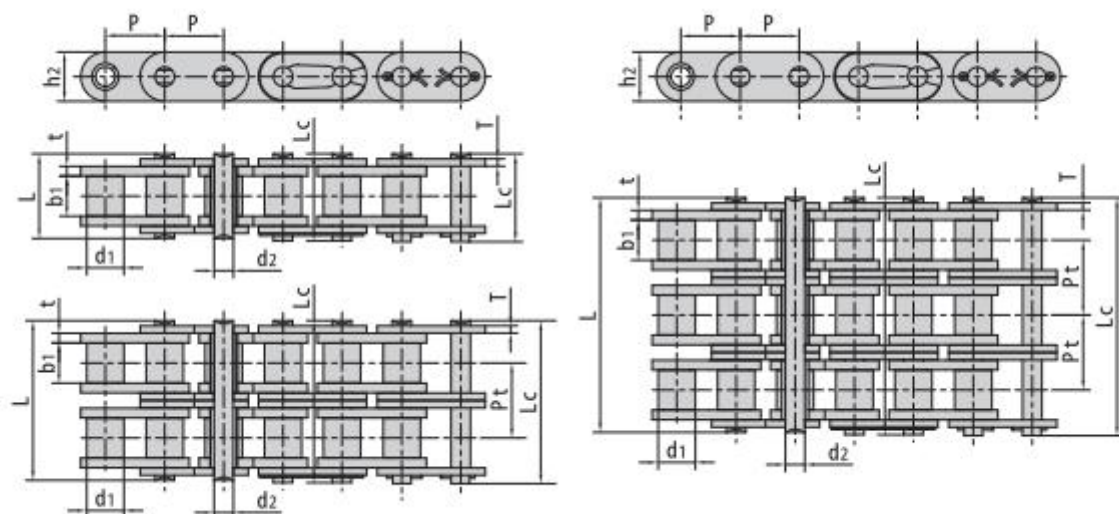

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	极限拉伸载荷 Ultimate tensile strength	平均拉伸载 荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Pt	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
C08B-1	12.700	8.51	7.75	4.45	16.7	18.2	11.8	1.60	—	18.0/4091	19.5	0.80
C10B-1	15.875	10.16	9.65	5.08	19.5	20.9	14.7	1.70	—	22.4/5091	27.9	1.06
C12B-1	19.050	12.07	11.68	5.72	22.5	25.2	16.0	1.85	—	29.0/6591	32.2	1.32
C16B-1	25.400	15.88	17.02	8.28	36.1	39.1	21.0/24.0	4.15/3.1	—	60.0/13636	72.8	3.08/3.49
C20B-1	31.750	19.05	19.56	10.19	41.3	45.0	26.4	4.5/3.5	—	95.0/21591	106.7	4.16
C24B-1	38.100	25.40	25.40	14.63	53.4	57.8	33.2	6.0/4.8	—	160.0/36364	178.0	7.47
C28B-1	44.450	27.94	30.99	15.90	65.1	69.5	36.7	7.5/6.0	—	200.0/45455	222.0	9.90
C32B-1	50.800	29.21	30.99	17.81	66.0	71.0	42.0	7.0/6.0	—	250.0/56818	277.5	10.45
C08B-2	12.700	8.51	7.75	4.45	31.2	32.2	11.8	1.60	13.92	32.0/7273	38.7	1.45
C10B-2	15.875	10.16	9.65	5.08	36.1	37.5	14.7	1.70	16.59	44.5/10114	57.8	2.00
C12B-2	19.050	12.07	11.68	5.72	42.0	44.7	16.0	1.85	19.46	57.8/13136	66.1	2.62
C16B-2	25.400	15.88	17.02	8.28	68.0	71.0	21.0/24.0	4.15/3.1	31.88	106.0/24091	133.0	6.10/6.92
C20B-2	31.750	19.05	19.56	10.19	77.8	81.5	26.4	4.5/3.5	36.45	170.0/38636	211.2	8.23
C24B-2	38.100	25.40	25.40	14.63	101.7	106.2	33.2	6.0/4.8	48.36	280.0/63636	319.2	14.77
C28B-2	44.450	27.94	30.99	15.90	124.6	129.1	36.7	7.5/6.0	59.56	360.0/81818	406.8	19.82
C32B-2	50.800	29.21	30.99	17.81	124.6	129.6	42.0	7.0/6.0	58.55	450.0/102273	508.5	20.94
C08B-3	12.700	8.51	7.75	4.45	45.1	46.1	11.8	1.60	13.92	47.5/10795	57.8	2.10
C10B-3	15.875	10.16	9.65	5.08	52.7	54.1	14.7	1.70	16.59	66.7/15159	84.5	2.87
C12B-3	19.050	12.07	11.68	5.72	61.5	64.2	16.0	1.85	19.46	86.7/19705	101.8	3.89
C16B-3	25.400	15.88	17.02	8.28	99.8	102.9	21.0/24.0	4.15/3.1	31.88	160.0/36364	203.7	9.12/10.34
C20B-3	31.750	19.05	19.56	10.19	114.2	117.9	26.4	4.5/3.5	36.45	250.0/56818	290.0	11.34
C24B-3	38.100	25.40	25.40	14.63	150.1	154.6	33.2	6.0/4.8	48.36	425.0/96591	493.0	22.10
C28B-3	44.450	27.94	30.99	15.90	184.2	188.7	36.7	7.5/6.0	59.56	530.0/120454	609.5	29.64
C32B-3	50.800	29.21	30.99	17.81	183.2	188.2	42.0	7.0/6.0	58.55	670.0/152273	770.5	31.27

短节距输送链附件

Short pitch conveyor chain attachments

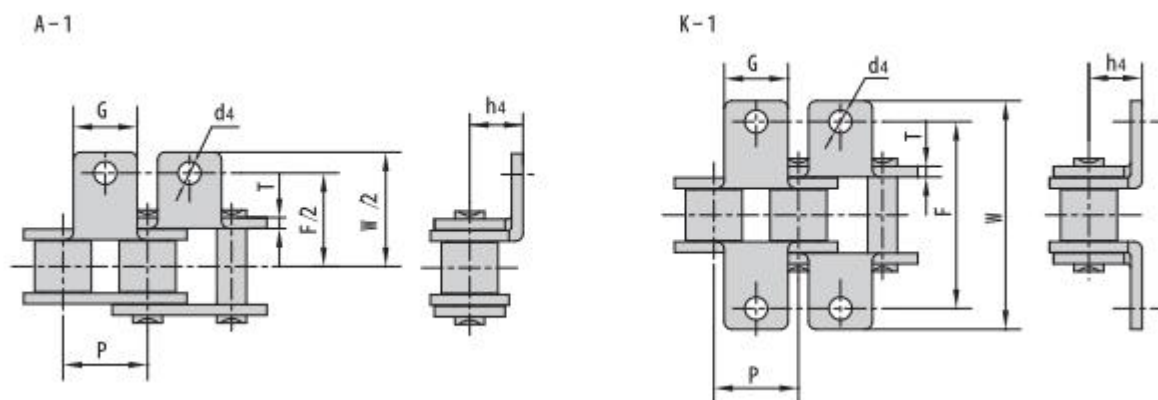



DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	P	G	F	W	T	h4	d4
		mm	mm	mm	mm	mm	mm	mm
04C	25	6.350	5.6	13.80	23.2	0.80	4.30	3.4
06C	35	9.525	7.9	19.00	28.6	1.30	6.35	3.4
08A	40	12.700	9.5	25.40	35.2	1.50	7.90	3.4
085	41	12.700	9.5	24.00	33.4	1.30	6.90	3.6
10A	50	15.875	12.7	31.75	46.2	2.03	10.30	5.5
12A	60	19.050	15.9	38.10	55.6	2.42	11.90	5.5
16A	80	25.400	19.1	50.80	64.8	3.25	15.90	6.8
20A	100	31.750	25.4	63.50	89.8	4.00	19.80	9.2
24A	120	38.100	28.6	76.20	108.5	4.80	23.00	9.8
28A	140	44.450	34.9	88.90	123.0	5.60	28.60	11.4
32A	160	50.800	38.1	101.60	142.8	6.40	31.75	13.1
40A	200	63.500	50.8	127.00	179.0	8.00	42.88	16.3
*06B		9.525	8.0	19.04	27.0	1.30	6.50	3.5
08B		12.700	9.5	25.40	36.4	1.60	8.90	4.5
10B		15.875	14.3	31.75	44.6	1.70	10.31	5.3
12B		19.050	16.0	38.10	52.4	1.85	13.46	6.4
16B		25.400	19.1	50.80	72.6	3.10	15.88	6.4
20B		31.750	35.0	63.50	100.5	3.50	19.80	9.0
24B		38.100	30.0	76.20	108.4	4.80	26.67	10.5
28B		44.450	35.0	88.90	123.0	6.00	28.58	13.1
32B		50.800	38.1	101.60	142.8	6.00	31.75	13.1

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

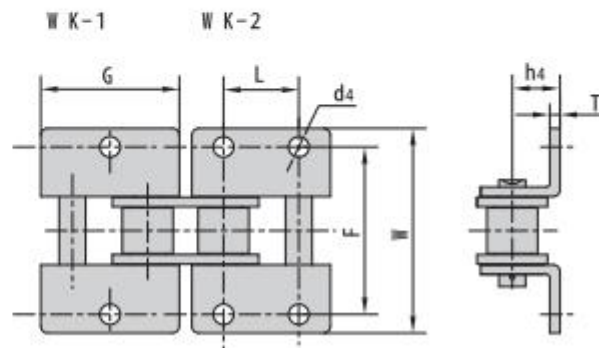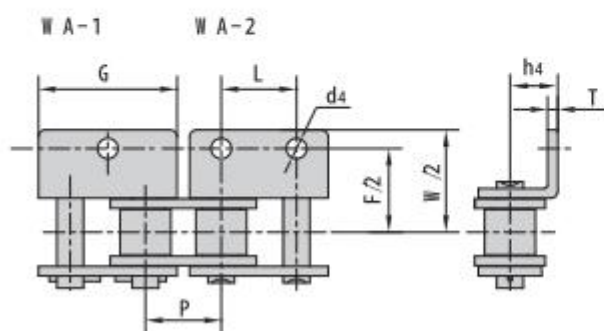


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	P	G	L	F	W	T	h ₄	d ₄
		mm	mm	mm	mm	mm	mm	mm	mm
04C	25	6.350	11.41	6.350	13.80	23.2	0.80	4.30	3.40
06C	35	9.525	17.32	9.525	19.00	28.6	1.30	6.35	2.80
08A	40	12.700	23.00	12.700	25.40	35.6	1.50	7.90	3.40
085	41	12.700	22.30	12.700	24.00	35.0	1.30	7.20	4.85
10A	50	15.875	28.80	15.875	31.75	46.8	2.03	10.30	5.50
12A	60	19.050	34.65	19.050	38.10	56.4	2.42	11.90	5.50
16A	80	25.400	45.90	25.400	50.80	73.2	3.25	15.90	6.80
20A	100	31.750	57.65	31.750	63.50	89.8	4.00	19.80	9.20
24A	120	38.100	69.30	38.100	76.20	108.8	4.80	23.00	9.80
28A	140	44.450	80.45	44.450	88.90	123.0	5.60	28.60	11.40
32A	160	50.800	92.00	50.800	101.60	142.8	6.40	31.75	13.10
40A	200	63.500	115.50	63.500	127.00	179.0	8.00	42.88	16.30
*06B		9.525	17.72	9.525	19.04	27.0	1.30	6.50	3.50
08B		12.700	24.00	12.700	25.40	36.4	1.60	8.90	4.30
10B		15.875	29.58	15.875	31.80	44.6	1.70	10.31	5.30
12B		19.050	34.05	19.050	38.10	52.4	1.85	13.46	6.40
16B		25.400	46.40	25.400	50.80	72.6	3.10	15.88	6.40
20B		31.750	58.10	31.750	63.00	100.5	3.50	19.80	9.00
24B		38.100	71.30	38.100	76.20	108.4	4.80	26.67	10.50
28B		44.450	81.10	44.450	88.90	123.0	6.00	28.58	13.10
32B		50.800	92.80	50.800	101.60	142.8	6.00	31.75	13.10

*直链板

*Straight side plates

短节距输送链附件

Short pitch conveyor chain attachments

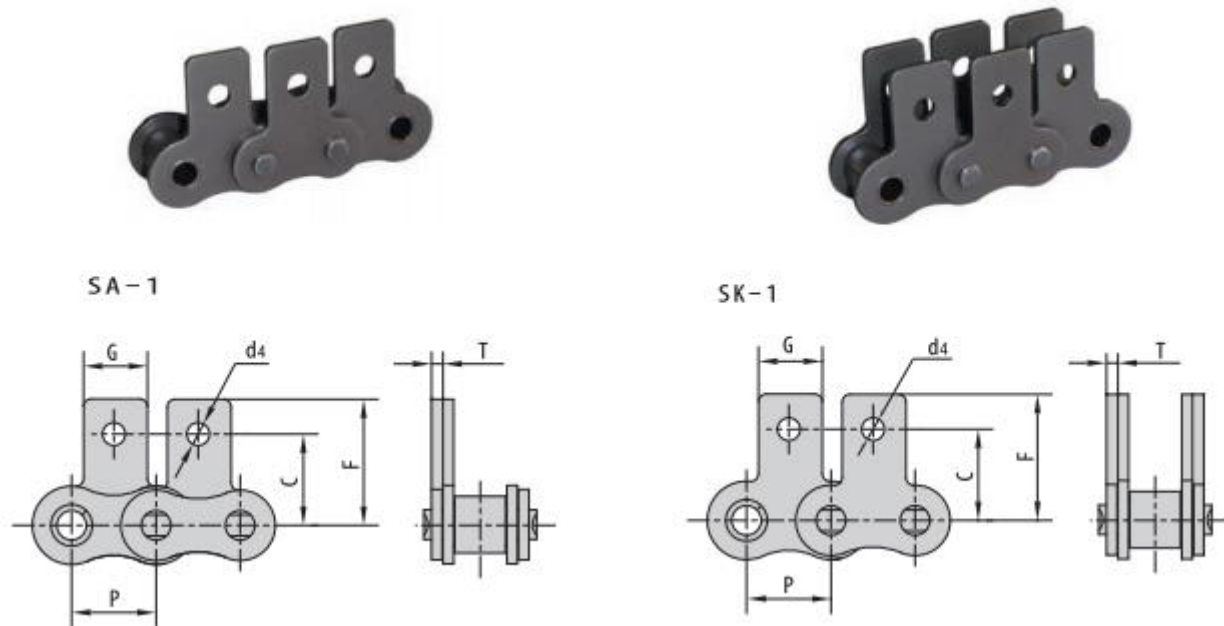



DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	P	G	C	F	T	d ₄
		mm	mm	mm	mm	mm	mm
04C	25	6.350	5.6	7.95	11.70	0.80	3.4
06C	35	9.525	7.9	9.50	14.55	1.30	3.4
08A	40	12.700	9.5	12.70	19.05	1.50	3.4
085	41	12.700	9.5	11.85	16.55	1.30	3.6
10A	50	15.875	12.7	15.90	25.25	2.03	5.5
12A	60	19.050	15.9	18.30	29.33	2.42	5.5
16A	80	25.400	19.1	24.60	34.70	3.25	6.8
20A	100	31.750	25.4	31.80	43.30	4.00	9.2
24A	120	38.100	28.6	36.50	51.60	4.80	9.8
28A	140	44.450	34.9	44.50	62.00	5.60	11.4
32A	160	50.800	38.1	50.80	69.85	6.40	13.1
40A	200	63.500	50.8	63.50	88.90	8.00	16.3
*06B		9.525	8.0	9.52	13.50	1.30	3.5
08B		12.700	9.5	13.35	18.90	1.60	4.3
10B		15.875	14.3	16.50	22.95	1.70	5.3
12B		19.050	16.0	21.45	28.60	1.85	6.4
16B		25.400	19.1	23.15	34.00	3.10	6.4
20B		31.750	35.0	30.50	45.70	3.50	9.0
24B		38.100	36.0	36.00	61.50	4.80	10.5

*直链板

*Straight side plat

短节距输送链附件

Short pitch conveyor chain attachments

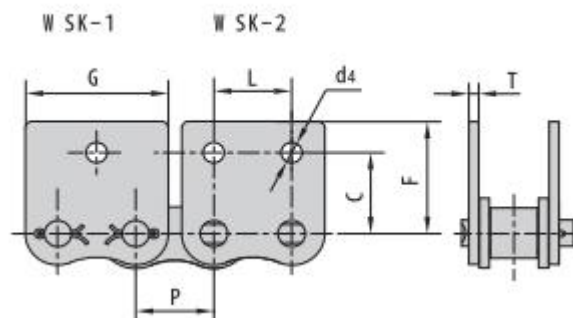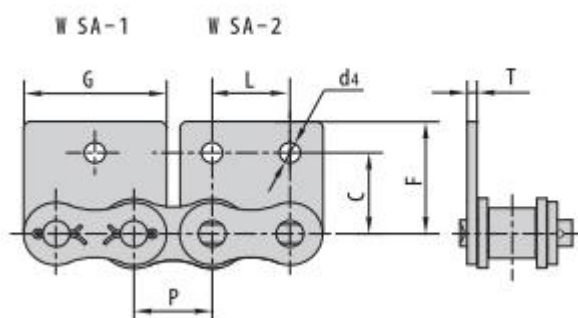


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	P	G	L	C	F	T	d ₄
		mm	mm	mm	mm	mm	mm	mm
04C	25	6.350	11.41	6.350	7.95	11.70	0.80	3.4
06C	35	9.525	17.32	9.525	9.50	14.55	1.30	2.8
08A	40	12.700	23.00	12.700	12.70	17.40	1.50	3.4
085	41	12.700	21.20	12.700	11.85	16.55	1.30	3.6
10A	50	15.875	28.80	15.875	15.90	23.05	2.03	5.5
12A	60	19.050	34.65	19.050	18.30	26.86	2.42	5.5
16A	80	25.400	45.90	25.400	24.60	35.45	3.25	6.8
20A	100	31.750	57.65	31.750	31.80	44.00	4.00	9.2
24A	120	38.100	69.30	38.100	36.50	51.60	4.80	9.8
28A	140	44.450	80.45	44.450	44.50	62.00	5.60	11.4
32A	160	50.800	92.00	50.800	50.80	69.85	6.40	13.1
40A	200	63.500	115.5	63.500	63.50	88.90	8.00	16.3
*06B		9.525	17.72	9.525	9.52	13.50	1.30	3.5
08B		12.700	23.30	12.700	13.35	18.90	1.60	4.3
10B		15.875	29.58	15.875	16.50	22.95	1.70	5.3
12B		19.050	34.05	19.050	21.45	28.60	1.85	6.4
16B		25.400	46.40	25.400	23.15	34.00	3.10	6.4
20B		31.750	58.10	31.750	30.50	45.70	3.50	9.0
24B		38.100	71.30	38.100	42.70	61.50	4.80	10.5

*直链板

*Straight side plates

短节距加长销输送链

Short pitch conveyor chains with extended pin

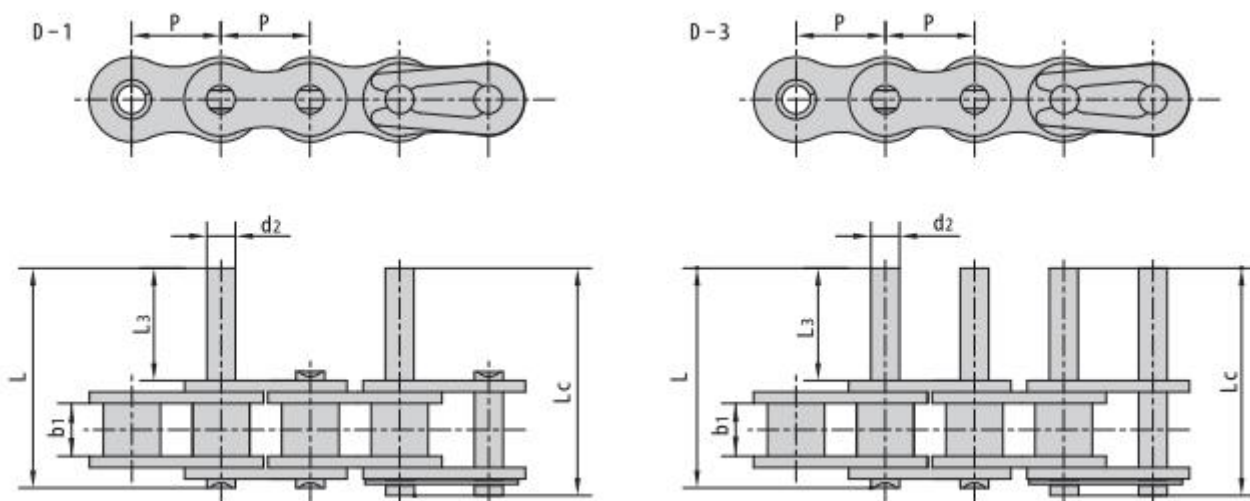


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	内节内宽 Width between inner plates	附件尺寸 Attachment dimensions			
		P	b1	d2	L3	L	Lc
		mm	mm	mm	mm	mm	mm
08A	40	12.700	7.85	3.96	9.5	25.1	26.2
10A	50	15.875	9.40	5.08	11.9	31.3	33.1
12A	60	19.050	12.57	5.94	14.3	38.6	40.6
16A	80	25.400	15.75	7.92	19.1	50.3	53.3
20A	100	31.750	18.90	9.53	23.8	61.8	66.1
24A	120	38.100	25.22	11.10	28.6	76.4	80.4
28A	140	44.450	25.22	12.70	33.3	84.8	89.4
32A	160	50.800	31.55	14.27	38.1	99.6	104.4
08B		12.700	7.75	4.45	9.5	25.1	26.6
10B		15.875	9.65	5.08	11.9	30.1	31.5
12B		19.050	11.68	5.72	14.3	35.4	37.1
16B		25.400	17.02	8.28	19.1	53.0	54.3
20B		31.750	19.56	10.19	41.0	79.9	83.6
24B		38.100	25.40	14.63	50.7	101.4	105.8
28B		44.450	30.99	15.90	61.9	124.0	128.4
32B		50.800	30.99	17.81	64.8	126.8	131.8


双节距输送链

Double pitch conveyor chains

小滚子型 small roller type

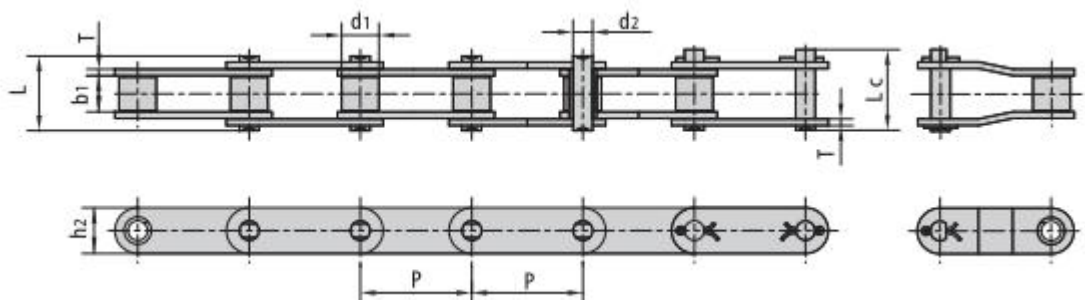

大滚子型 large roller type

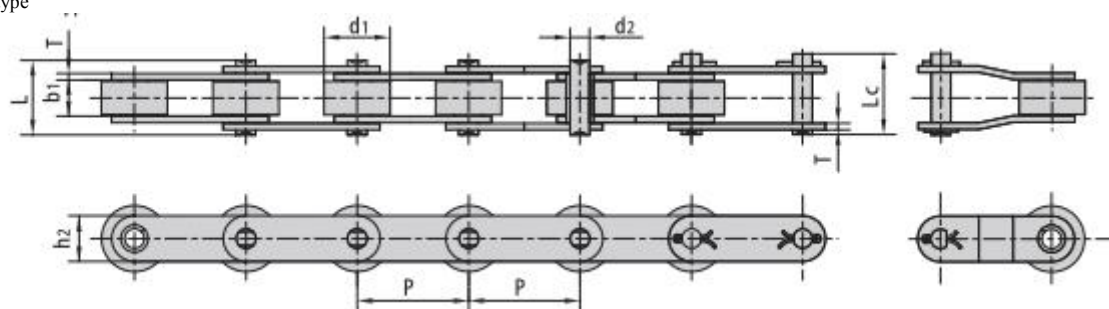


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
		P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
C208A	C2040	25.40	7.95	7.85	3.96	16.6	17.8	12.0	1.50	14.1/3205	16.7	0.50
C208AL	C2042		15.88									0.84
C208AH	C2040H	25.40	7.95	7.85	3.96	18.8	19.9	12.0	2.03	14.1/3205	17.2	0.65
C208AHL	C2042H		15.88									1.00
C208B		25.40	8.51	7.75	4.45	16.7	18.2	11.8	1.60	18.0/4091	19.4	0.55
C208BL			15.88									0.89
C210A	C2050	31.75	10.16	9.40	5.08	20.7	22.2	15.0	2.03	22.2/5045	28.1	0.78
C210AL	C2052		19.05									1.27
C210B		31.75	10.16	9.65	5.08	19.5	20.9	14.7	1.70	22.4/5036	24.6	0.75
C210BL			19.05									1.21
C212A	C2060	38.10	11.91	12.57	5.94	25.9	27.7	18.0	2.42	31.8/7227	36.8	1.12
C212AL	C2062		22.23									1.61
C212AH	C2060H	38.10	11.91	12.57	5.94	29.2	31.6	18.0	3.25	31.8/7227	41.6	1.44
C212AHL	C2062H		22.23									2.07
C212B		38.10	12.07	11.68	5.72	22.5	24.2	16.0	1.85	29.0/6519	31.9	0.90
C212BL			22.23									1.55
C216A	C2080	50.80	15.88	15.75	7.92	32.7	36.5	24.0	3.25	56.7/12886	65.7	2.08
C212AL	C2082		28.58									3.12
C216AH	C2080H	50.80	15.88	15.75	7.92	36.2	39.4	24.0	4.00	56.7/12886	70.0	2.54
C216AHL	C2082H		28.58									3.58
C216B		50.80	15.88	17.02	8.28	36.1	39.1	21.0	4.15/3.1	60.0/13489	66.0	2.14
C216BL			28.58									3.27


双节距输送链

Double pitch conveyor chains

小滚子型 small roller type

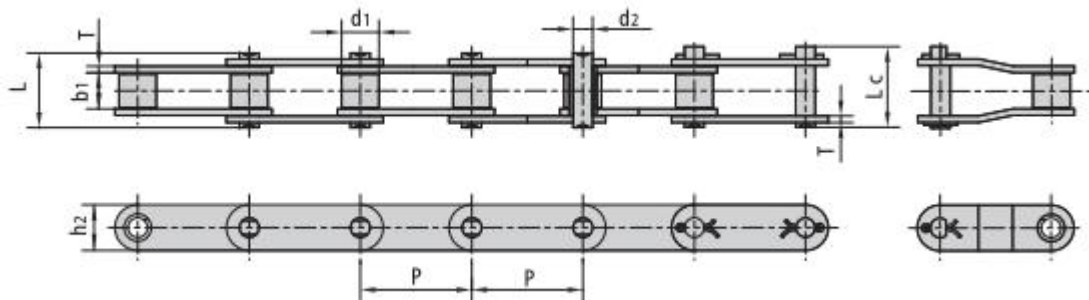



大滚子型 large roller type

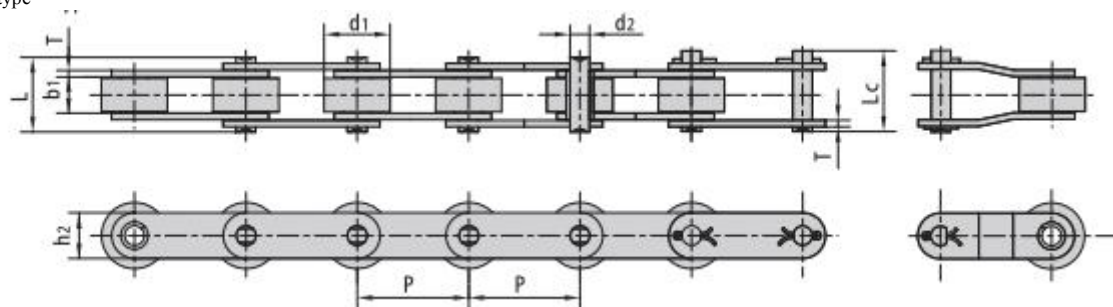

DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
		P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
C220A	C2100	63.50	19.05	18.90	9.53	40.4	44.7	30.0	4.00	88.5/20114	102.6	3.01
C220AL	C2102		39.67									4.83
C220AH	C2100H	63.50	19.05	18.90	9.53	43.6	46.9	30.0	4.80	88.5/20114	112.4	3.56
C220AHL	C2102H		39.67									5.38
C220B		63.50	19.05	19.56	10.19	41.3	45.0	26.4	4.50/3.50	95.0/21357	104.5	2.93
C220BL			39.67									5.01
C224A	C2120	76.20	22.23	25.22	11.10	50.3	54.3	35.7	4.80	127.0/28864	147.3	4.66
C224AL	C2122		44.45									7.66
C224AH	C2120H	76.20	22.23	25.22	11.10	53.5	57.5	35.7	5.60	127.0/28864	160.9	5.26
C224AHL	C2122H		44.45									8.26
C224B		76.20	25.40	25.40	14.63	53.4	57.8	33.2	6.00/4.80	160.0/35969	176.0	5.17
C224BL			44.45									7.88
C232A	C2160	101.60	28.58	31.75	14.27	64.8	69.6	47.8	6.40	226.8/51545	278.9	8.15
C232AL	C2162		57.15									13.00
C232AH	C2160H	101.60	28.58	31.75	14.27	68.2	73.0	47.8	7.20	226.8/51545	285.8	9.06
C232AHL	C2162H		57.15									13.84

双节距加长销输送链



Double pitch conveyor chains with extended pins

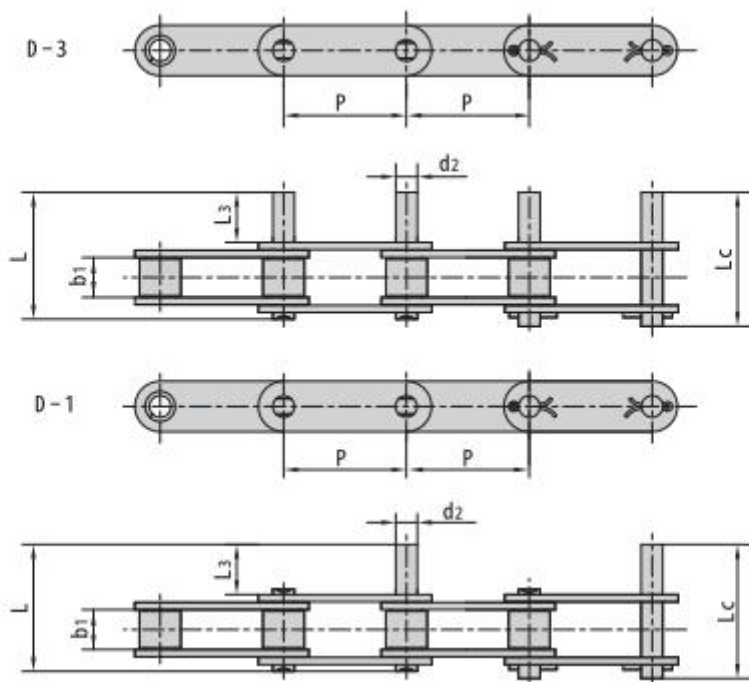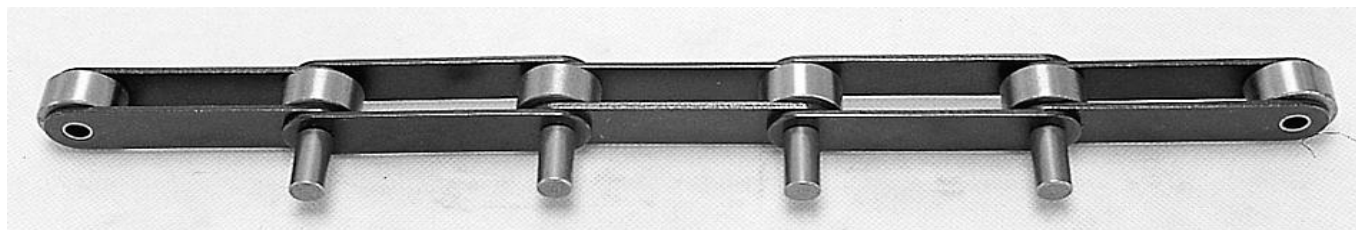

ISO 链号 ISO Chain No.	ANSI 链号 ANSI Chain No.	P	b ₁	d ₂	L ₃	L	L _c
		mm	mm	mm	mm	mm	mm
C208A	C2040	25.40	7.85	3.96	9.5	25.1	26.2
C208AL	C2042						
C210A	C2050	31.75	9.40	5.08	11.9	31.3	33.1
C210AL	C2052						
C212A	C2060	38.10	12.57	5.94	14.3	38.6	40.6
C212AL	C2062						
C212AH	C2060H	38.10	12.57	5.94	14.3	42.0	43.8
C212AHL	C2062H						
C216A	C2080	50.80	15.75	7.92	19.1	50.3	53.3
C216AL	C2082						
C216AH	C2080H	50.80	15.75	7.92	19.1	53.5	55.0
C216AHL	C2082H						
C220A	C2100	63.50	18.90	9.53	23.8	61.8	66.1
C220AH	C2100H	63.50	18.90	9.53	23.8	65.0	68.3
C220AHL	C2102H						
C224AH	C2120H	76.20	25.22	11.10	28.6	79.6	83.6
C224AHL	C2122H						
C232AH	C2160H	101.60	31.75	14.27	38.1	103.0	107.8

双节距输送链附件

Double pitch conveyor chain attachments

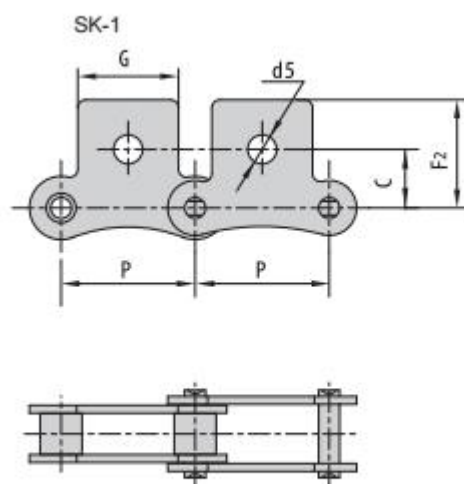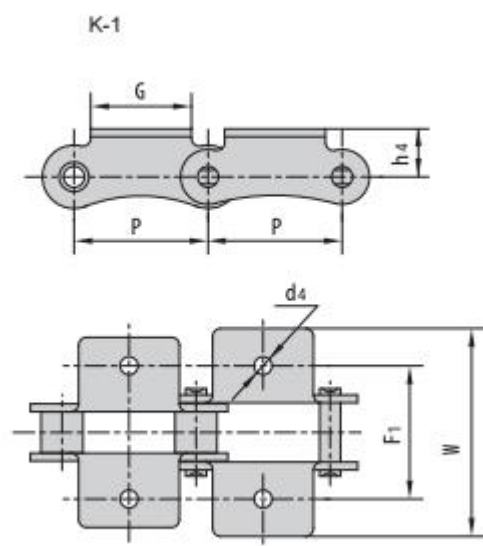


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	P	G	F ₁	W	h ₄	d ₄	C	F ₂	d ₅
		mm	mm	mm	mm	mm	mm	mm	mm	mm
208A	2040	25.40	19.1	25.4	39.6	9.1	3.4	11.1	20.5	5.5
210A	2050	31.75	23.8	31.8	49.0	11.1	5.5	14.3	25.0	6.6
212A	2060	38.10	28.6	42.9	67.8	14.7	5.5	17.5	32.9	9.2
216A	2080	50.80	38.1	55.6	87.8	19.1	6.8	22.2	43.5	11.0
220A	2100	63.50	47.6	66.6	107.5	23.4	9.2	28.6	50.4	13.0
224A	2120	76.20	57.2	79.3	121.4	27.8	10.5	33.3	55.5	15.0
208B		25.40	23.2	25.4	39.6	9.1	4.5	11.1	20.5	5.5
210B		31.75	23.8	31.8	49.0	11.1	5.5			
212B		38.10	35.0	38.1	57.0	14.7	6.6			
216B		50.80	44.0	50.8	84.0	19.1	6.6			
220B		63.50	52.0	63.5	104.0	23.4	8.4			
224B		76.20	60.0	76.2	120.0	27.8	10.5			


双节距输送链附件

Double pitch conveyor chain attachments


A-1

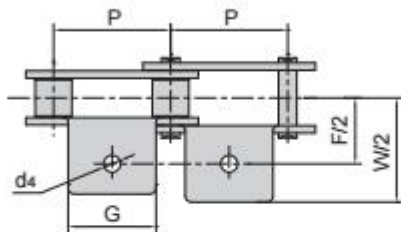


K-1

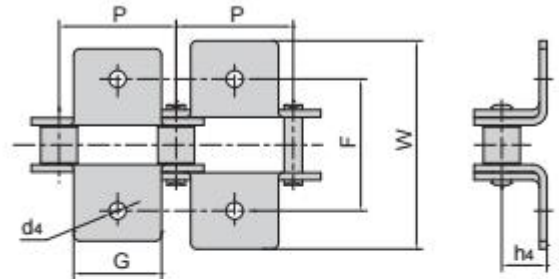

A-2

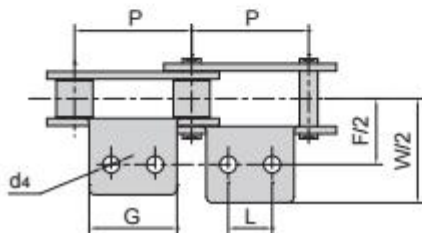


K-2

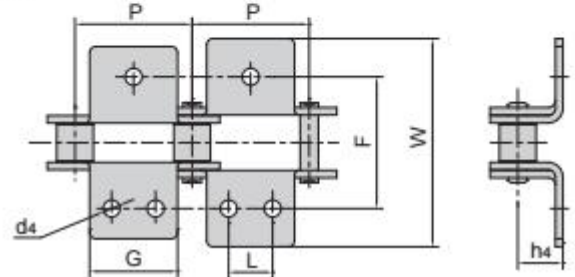

ISO 链号 ISO Chain No.	ANSI 链号 ANSI Chain No.	P	G	L	F	W	h ₄	d ₄
		mm	mm	mm	mm	mm	mm	mm
C208A	C2040	25.40	19.1	9.5	25.4	39.6	9.1	3.4
C208AL	C2042							
C208B		25.40	23.2	12.7	25.4	39.6	9.1	4.5
C208BL								
C210A	C2050	31.75	23.8	11.9	31.8	49.0	11.1	5.5
C210AL	C2052							
C212A	C2060	38.10	28.6	14.3	42.9	67.8	14.7	5.5
C212AL	C2062							
C212AH	C2060H	38.10	28.6	14.3	42.9	67.8	14.7	5.5
C212AHL	C2062H							
C216A	C2080	50.80	38.1	19.1	55.6	87.8	19.1	6.8
C216AL	C2082							
C216AH	C2080H	50.80	38.1	19.1	55.6	87.8	19.1	6.8
C216AHL	C2082H							
C220A	C2100	63.50	47.6	23.8	66.6	107.5	23.4	9.2
C220AL	C2102							
C220AH	C2100H	63.50	47.6	23.8	66.6	107.5	23.4	9.2
C220AHL	C2102H							
C224A	C2120	76.20	57.2	28.6	79.3	121.4	27.8	11.0
C224AL	C2122							
C224AH	C2120H	76.20	57.2	28.6	79.3	121.4	27.8	11.0
C224AHL	C2122H							
C232A	C2160	101.60	76.2	38.1	104.7	151.6	36.5	13.1
C232AL	C2162							
C232AH	C2160H	101.60	76.2	38.1	104.7	151.6	36.5	13.1
C232AHL	C2162H							

双节距输送链附件


Double pitch conveyor chain attachments

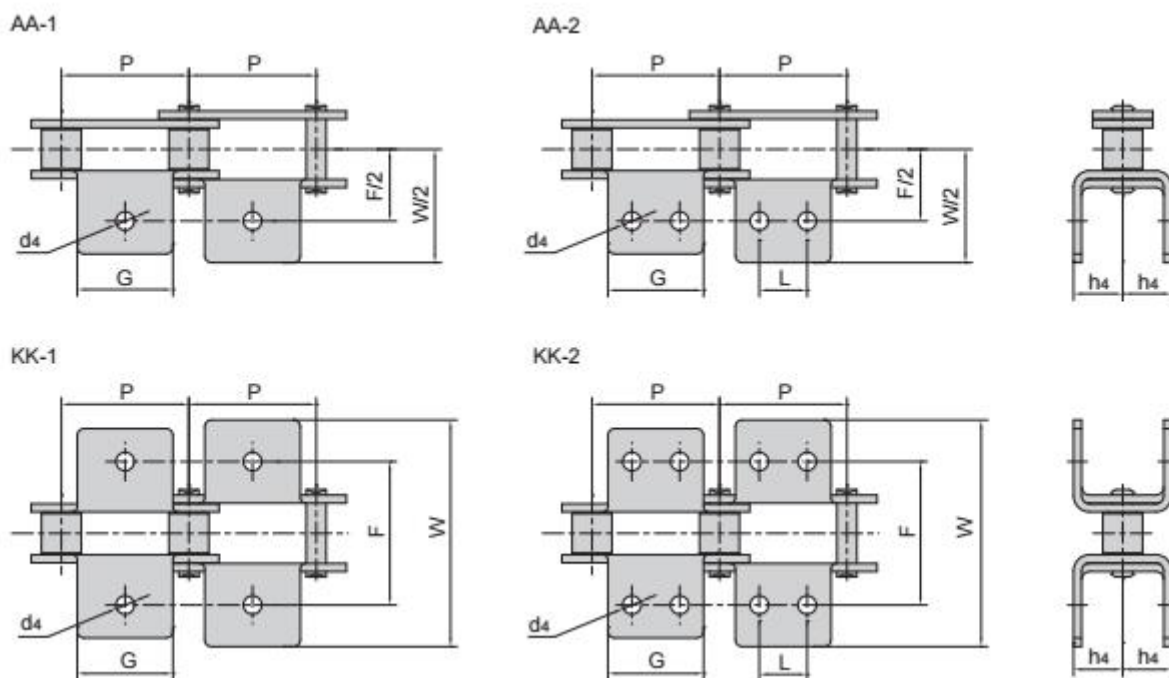

链号	ANSI 链号 ANSI Chain No.	P	G	L	F	W	h4	d4
		mm	mm	mm	mm	mm	mm	mm
C208A	C2040	25.40	19.1	9.5	25.4	39.6	9.1	3.4
C208AL	C2042							
C208B		25.40	23.2	12.7	25.4	39.6	9.1	4.5
C208BL								
C210A	C2050	31.75	23.8	11.9	31.8	49.0	11.1	5.5
C210AL	C2052							
C212A	C2060	38.10	28.6	14.3	42.9	67.8	14.7	5.5
C212AL	C2062							
C212AH	C2060H	38.10	28.6	14.3	42.9	67.8	14.7	5.5
C212AHL	C2062H							
C216A	C2080	50.80	38.1	19.1	55.6	87.8	19.1	6.8
C216AL	C2082							
C216AH	C2080H	50.80	38.1	19.1	55.6	87.8	19.1	6.8
C216AHL	C2082H							

双节距输送链附件


Double pitch conveyor chain attachments

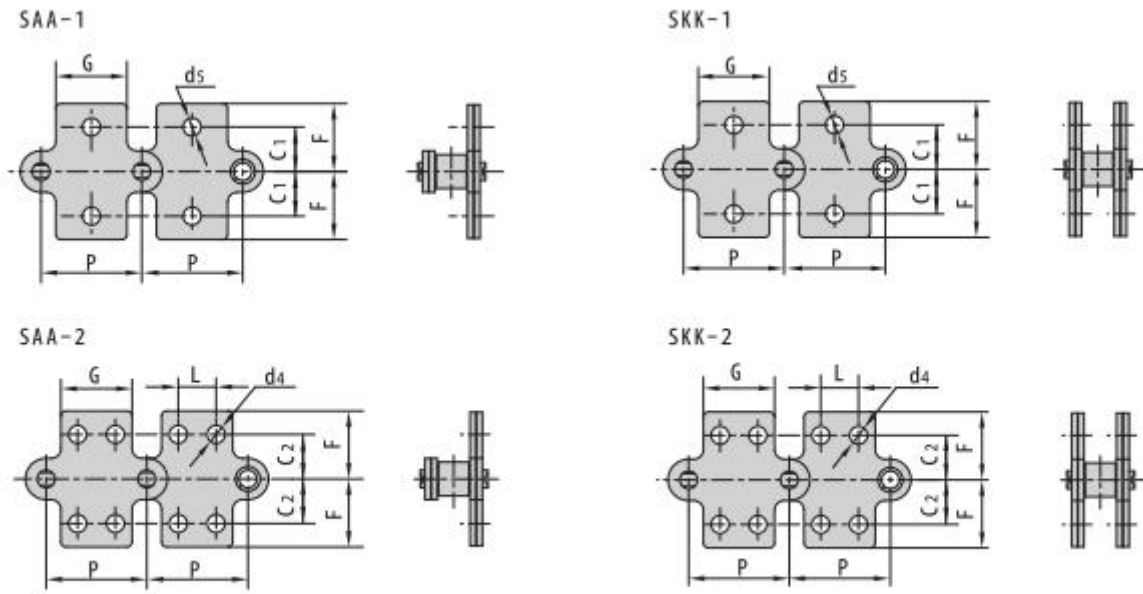

链号	ANSI 链号 ANSI Chain No.	P	G	L	C ₁	C ₂	F	d ₄	d ₅
		mm	mm	mm	mm	mm	mm	mm	mm
C208A	C2040	25.40	19.1	9.5	11.1	13.5	20.5	3.4	5.5
C208AL	C2042								
C208B		25.40	23.2	12.7	11.1	13.5	20.5	4.5	5.5
C208BL									
C210A	C2050	31.75	23.8	11.9	14.3	15.9	25.0	5.5	6.6
C210AL	C2052								
C212A	C2060	38.10	28.6	14.3	17.5	19.1	32.9	5.5	9.2
C212AL	C2062								
C212AH	C2060H	38.10	28.6	14.3	17.5	19.1	32.9	5.5	9.2
C212AHL	C2062H								
C216A	C2080	50.80	38.1	19.1	22.2	25.4	43.5	6.6	11.0
C216AL	C2082								
C216AH	C2080H	50.80	38.1	19.1	22.2	25.4	43.5	6.6	11.0
C216AHL	C2082H								

双节距输送链附件


Double pitch conveyor chain attachments

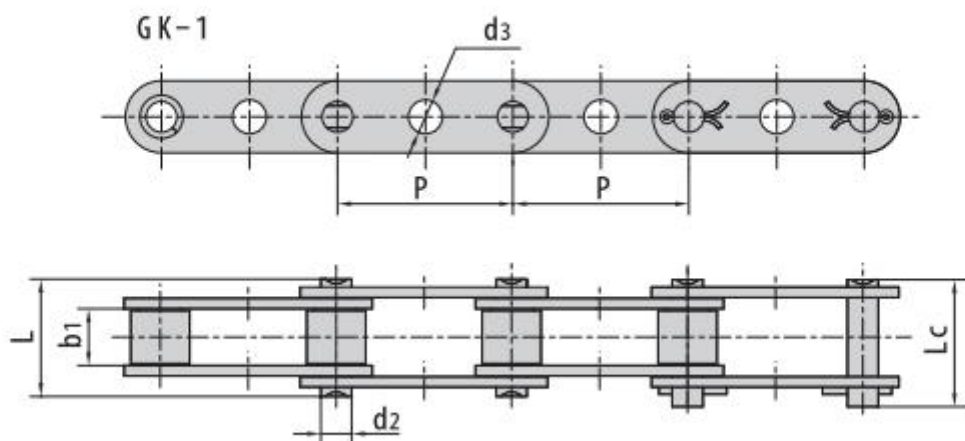

ISO 链号 ISO Chain No.	ANSI 链号 ANSI Chain No.	P	b ₁	d ₂	d ₃	L	L _c
		mm	mm	mm	mm	mm	mm
C208A	C2040	25.40	7.85	3.96	4.1	16.6	18.8
C208AL	C2042						
C210A	C2050	31.75	9.40	5.08	5.1	20.7	23.3
C210AL	C2052						
C212A	C2060	38.10	12.57	5.94	6.1	25.9	28.3
C212AL	C2062						
C212AH	C2060H	38.10	12.57	5.94	6.1	29.2	31.6
C212AHL	C2062H						
C216A	C2080	50.80	15.75	7.92	8.1	32.7	36.5
C216AL	C2082						
C216AH	C2080H	50.80	15.75	7.92	8.1	36.2	39.4
C216AHL	C2082H						
C220A	C2100	63.50	18.90	9.53	10.1	40.4	44.7
C220AL	C2102						
C220AH	C2100H					43.6	46.9
C220AHL	C2102H						




双节距输送链附件

Double pitch conveyor chain attachments

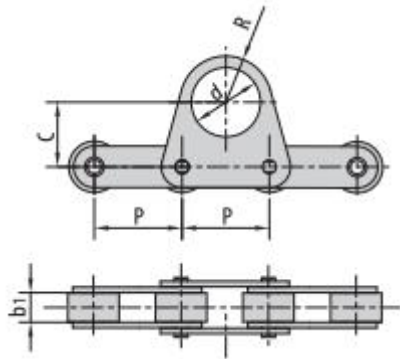


链号	P	b1	C	d	R
	mm	mm	mm	mm	mm
C2062F5	38.1	12.57	28.0	30	20

链号	P	b1	C	F	d4	h4
	mm	mm	mm	mm	mm	mm
C2042F8	25.4	7.85	17.75	28	8.5	10
C2062HF13	38.1	12.57	31.9	42.9	6	9.8
C224AF2	76.2	25.22	52.7	77.75	13	26.8

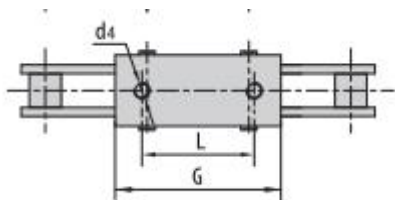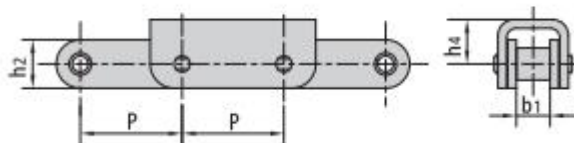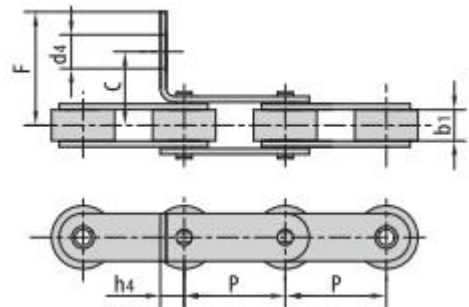


链号	P	b1	L	G	d4	h2	h4
	mm	mm	mm	mm	mm	mm	mm
C2060H-U1F1	38.1	12.57	42.0	62.0	M6	18.0	16.5

链号	P	h	H	h4	G	d4
	mm	mm	mm	mm	mm	mm
C2042HF1	25.40	15.0	25.0	6.0	37.4	7.0




双节距输送链附件

Double pitch conveyor chain attachments

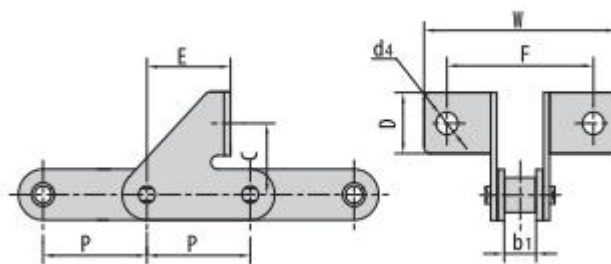


链号	P	b ₁	F	W	C	D	E	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
C2050SD	31.75	9.4	45.0	59.0	21.2	18.0	25.7	6.6

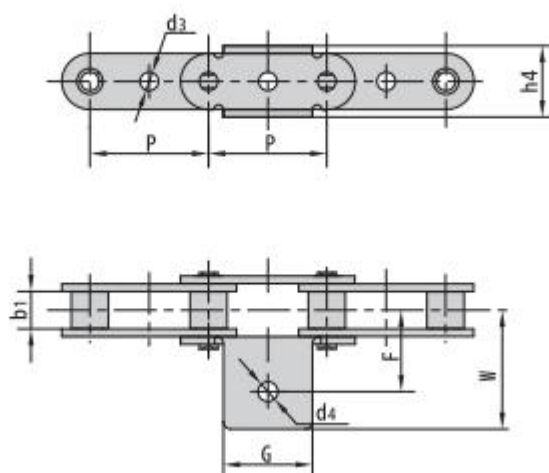


链号	P	b ₁	G	F	W	h ₄	d ₄	d ₃
	mm	mm	mm	mm	mm	mm	mm	mm
C2080K1F4	50.8	15.75	38.1	40.0	56.0	30.5	8.5	—
C2080HGF1	50.8	15.75	36.0	38.0	46.0	28.4	6.0	8.1

双节距输送链附件

Double pitch conveyor chain attachments

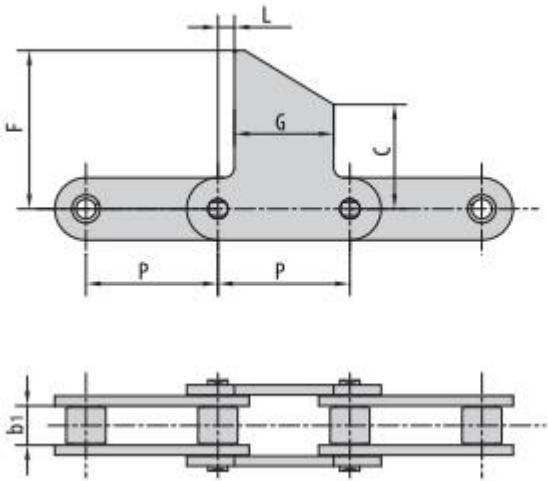


链号	P	b ₁	L	G	C	F
	mm	mm	mm	mm	mm	mm
C2100HF4	63.5	18.9	7.9	47.8	50.8	76.2

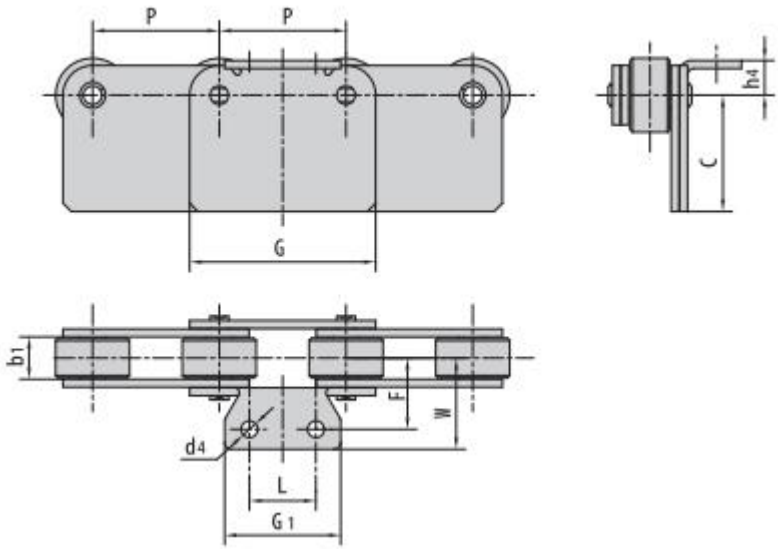

链号	P	b ₁	L	G ₁	G	h ₄	d ₄	C	F	W
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P76.2K2F7	76.2	25.22	40.0	70.0	111.9	20.8	10.0	70.0	43.0	55.0

空心销轴链


Hollow pin chains

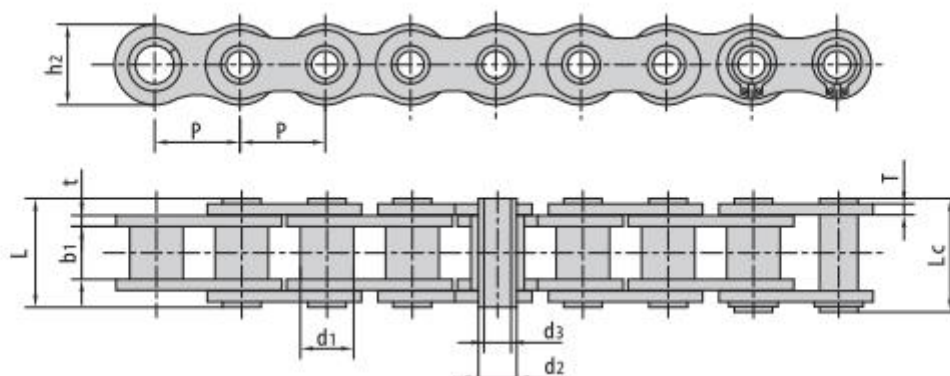

链号	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
08BHPF	12.700	8.51	7.75	6.55	4.50	16.4	17.6	11.80	1.60/1.30	11.1/2523	12.10	0.56
40HP	12.700	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	11.0/2500	12.20	0.54
50HP	15.875	10.16	9.40	7.03	5.13	20.7	21.9	15.09	2.03	20.0/4545	22.60	0.91
50H-HP	15.875	10.16	9.40	7.03	5.13	22.6	23.7	15.09	2.42	20.0/4545	22.60	1.02
60HP	19.050	11.91	12.70	8.31	6.00	25.8	26.8	18.00	2.42	24.0/5455	26.90	1.29
80HP	25.400	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	50.0/11364	52.00	2.26
80H-HP	25.400	15.88	15.75	11.40	8.05	35.7	37.0	24.00	4.00	50.0/11364	52.00	2.63
A2080HP	50.800	15.88	15.75	11.40	8.05	32.4	33.8	24.00	3.25	42.3/9615	46.10	1.60

空心销轴链


Hollow pin chains

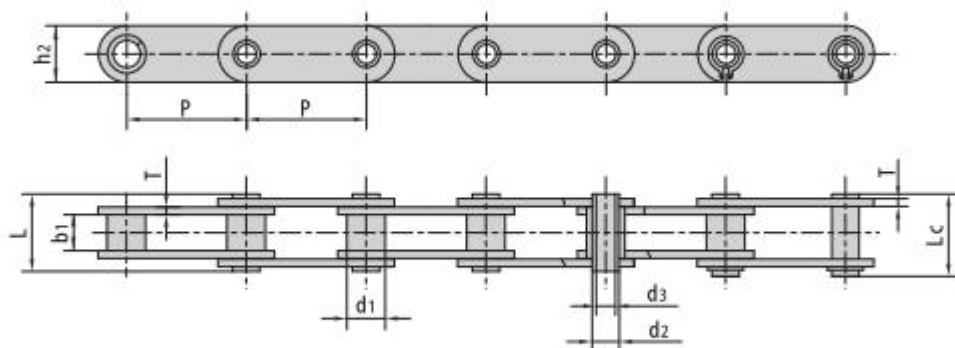

链号	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载 荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
HP12.5	12.500	8.51	8.20	6.65	4.50	16.4	17.6	11.60	1.5/1.3	8.0/1819	8.8	0.61
C08BHP	12.700	8.51	7.75	6.55	4.50	16.4	17.6	11.80	1.6/1.3	11.0/2500	11.5	0.62
C40HP	12.700	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	11.0/2500	12.2	0.64
C50HP	15.875	10.16	9.40	7.03	5.13	20.7	21.9	15.09	2.03	20.0/4545	22.6	1.05
C60HP	19.050	11.91	12.70	8.31	6.00	25.8	26.8	18.00	2.42	24.0/5455	26.9	1.52
C80HP	25.400	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	50.0/11364	52.0	2.63
C2040HP	25.400	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	11.0/2500	12.6	0.46
C2040HPF1	25.400	7.95	7.85	5.63	M4	16.5	17.6	12.00	1.50	9.0/2045	9.9	0.44
C2050HP	31.750	10.16	9.40	7.22	5.12	20.5	21.8	15.00	2.03	20.4/4636	22.8	0.76
C2060HP	38.100	11.91	12.70	8.31	6.00	25.8	26.8	17.00	2.42	24.0/5455	27.1	1.02
C2080HP	50.800	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	50.0/11364	52.0	1.81
C2060H-HP	38.100	11.91	12.70	8.31	6.00	29.2	30.2	17.00	3.25	24.0/5455	27.1	1.29
HB38.1F1	38.100	10.16	9.65	7.10	5.40	20.4	-	16.00	2.03	13.0/2954	14.3	0.67
HP40F1	40.000	18.00	22.00	12.00	8.00	47.5	48.2	35.00	5.00	57.0/13049	63.8	5.38
HP40F2	40.000	18.00	22.00	12.00	8.20	47.5	48.2	35.00	5.00	57.0/13049	63.0	5.37
HP50F1	50.000	26.00	14.50	20.00	14.70	35.3	36.2	40.00	3.10	30.0/6818	33.6	3.98
HP50F7	50.000	18.00	15.00	14.00	10.20	36.0	37.5	26.00	4.00	40.0/9091	43.2	2.56
HP50F10	50.000	18.00	22.00	12.10	8.30	39.5	40.6	30.00	3.00	45.0/10227	48.0	2.73
HB55	55.000	18.00	22.00	14.00	10.00	43.4	44.5	30.00	4.00	50.0/11364	52.0	3.31
HB55F1	55.000	24.00	24.00	17.00	12.00	52.0	53.5	40.00	5.00	90.0/20455	100.0	6.34

空心销轴链

Hollow pin chains

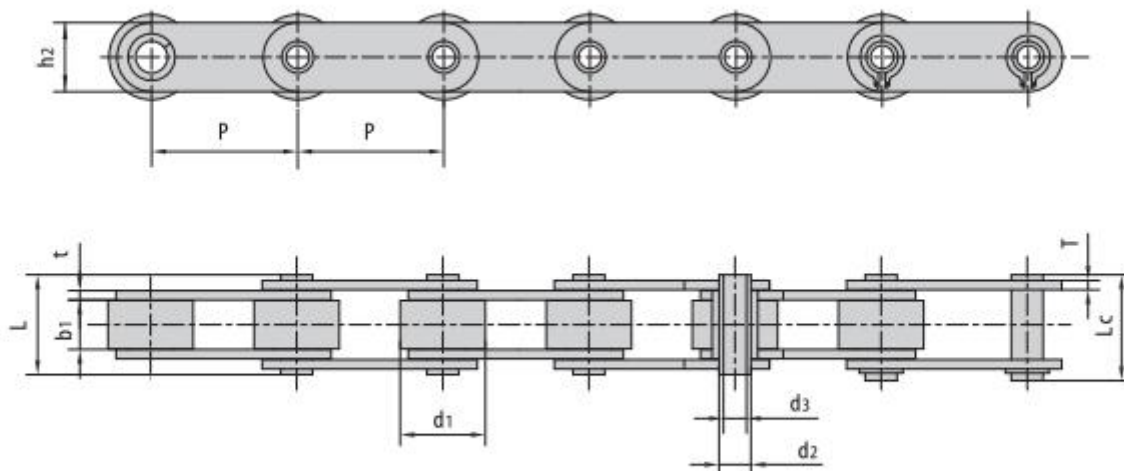


链号	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载 荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
C2042HP	25.40	15.88	7.85	5.63	4.00	16.5	17.6	12.0	1.50	11.0/2500	12.60	0.78
C2052HP	31.75	19.05	9.53	7.22	5.12	20.5	21.8	15.0	2.03	20.4/4636	22.80	1.25
C2062HP	38.10	22.23	12.70	8.31	6.00	25.8	26.8	17.0	2.42	24.0/5455	27.10	1.72
C2082HP	50.80	28.58	15.75	11.40	8.05	32.4	33.8	24.0	3.25	50.0/11364	52.00	2.82
C2042H-HP	25.40	15.88	7.85	5.63	4.00	18.8	19.9	12.0	2.03	11.0/2500	13.20	0.95
C2052H-HP	31.75	19.05	9.53	7.22	5.12	22.1	23.4	15.0	2.42	20.4/4636	23.50	1.44
C2062H-HP	38.10	22.23	12.70	8.31	6.00	29.2	30.2	17.0	3.25	24.0/5455	27.60	1.99
C2082H-HP	50.80	28.58	15.75	11.40	8.05	36.2	37.6	24.0	4.00	50.0/11364	56.50	3.34

镀达克罗链

Corrosion resistant/Dacromet-plated chains

达克罗链条适合于有腐蚀性的场合

Dacromet-plated chains are suitable for corrosive conditions

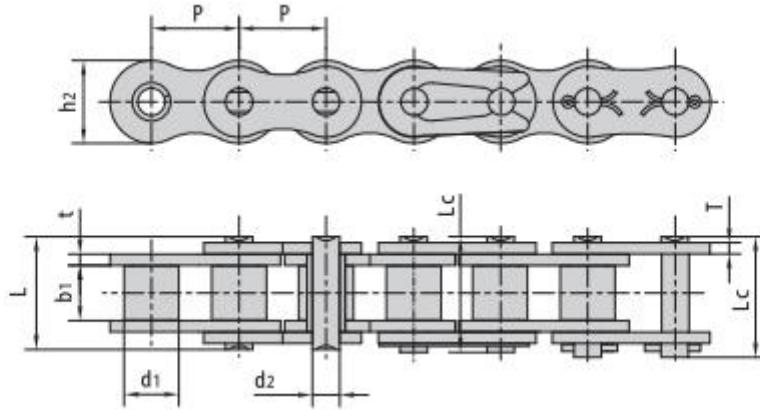

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
*25DR	6.350	3.30	3.18	2.31	7.90	8.40	6.00	0.80	3.50/795	0.15
*35DR	9.525	5.08	4.77	3.58	12.40	13.17	9.00	1.30	7.90/1795	0.33
41DR	12.700	7.77	6.25	3.58	13.75	15.00	9.91	1.30	6.67/1516	0.41
40DR	12.700	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.10/3205	0.62
50DR	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.20/5045	1.02
60DR	19.050	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.80/7227	1.50
80DR	25.400	15.88	15.75	7.92	32.70	35.00	24.00	3.25	56.70/12886	2.60
100DR	31.750	19.05	18.90	9.53	40.40	44.70	30.00	4.00	88.50/20114	3.91
120DR	38.100	22.23	25.22	11.10	50.30	54.30	35.70	4.80	127.00/28864	5.62
140DR	44.450	25.40	25.22	12.70	54.40	59.00	41.00	5.60	172.40/39182	7.50
160DR	50.800	28.58	31.55	14.27	64.80	69.60	47.80	6.40	226.80/51545	10.10
04BDR	6.000	4.00	2.80	1.85	6.80	7.80	5.00	0.60	3.00/682	0.11
05BDR	8.000	5.00	3.00	2.31	8.20	8.90	7.10	0.80	5.00/1136	0.20
#06BDR	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	9.00/2045	0.41
08BDR	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	18.00/4091	0.69
10BDR	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	22.40/5091	0.93
12BDR	19.050	12.07	11.68	5.72	22.50	24.20	16.00	1.85	29.00/6591	1.15
16BDR	25.400	15.88	17.02	8.28	36.10	37.40	21.00	4.15/3.1	60.00/13636	2.71
20BDR	31.750	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	95.00/21591	3.70
24BDR	38.100	25.40	25.40	14.63	53.40	57.80	33.20	6.0/4.8	160.00/36364	7.10
28BDR	44.450	27.94	30.99	15.90	65.10	69.50	36.70	7.5/6.0	200.00/45455	8.50
32BDR	50.800	29.21	30.99	17.81	66.00	71.00	42.00	7.0/6.0	250.00/56818	10.25

注意: 上述规格的双排链、双节距输送链系列依照要求也适合镀达克罗。

Note: Duplex & Triplex dacromet-plated chains are available in all sizes.


Double pitch dacromet-plated conveyor chains are available upon request.

镀镍链

Corrosion resistant/Nickel-plated chains

镀镍链条适合在室外雨水侵蚀等场合

Nickel-plated chains are suitable for outdoor conditions such as exposure to rain etc..

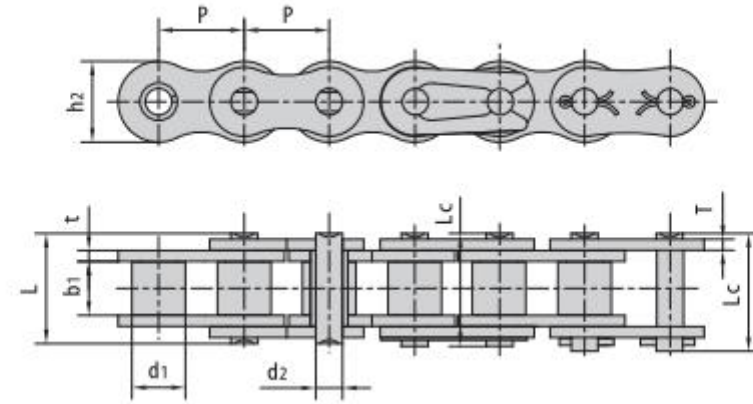

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/ bf	kg/m
*25NP	6.350	3.30	3.18	2.31	7.90	8.40	6.00	0.80	3.50/795	0.15
*35NP	9.525	5.08	4.77	3.58	12.40	13.17	9.00	1.30	7.90/1795	0.33
41NP	12.700	7.77	6.25	3.58	13.75	15.00	9.91	1.30	6.67/1516	0.41
40NP	12.700	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.10/3205	0.62
50NP	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.20/5045	1.02
60NP	19.050	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.80/7227	1.50
80NP	25.400	15.88	15.75	7.92	32.70	35.00	24.00	3.25	56.70/12886	2.60
100NP	31.750	19.05	18.90	9.53	40.40	44.70	30.00	4.00	88.50/20114	3.91
120NP	38.100	22.23	25.22	11.10	50.30	54.30	35.70	4.80	127.00/28864	5.62
140NP	44.450	25.40	25.22	12.70	54.40	59.00	41.00	5.60	172.40/39182	7.50
160NP	50.800	28.58	31.55	14.27	64.80	69.60	47.80	6.40	226.80/51545	10.10
04BNP	6.000	4.00	2.80	1.85	6.80	7.80	5.00	0.60	3.00/682	0.11
05BNP	8.000	5.00	3.00	2.31	8.20	8.90	7.10	0.80	5.00/1136	0.20
#06BNP	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	9.00/2045	0.41
08BNP	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	18.00/4091	0.69
10BNP	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	22.40/5091	0.93
12BNP	19.050	12.07	11.68	5.72	22.50	24.20	16.00	1.85	29.00/6591	1.15
16BNP	25.400	15.88	17.02	8.28	36.10	37.40	21.00	4.15/3.1	60.00/13636	2.71
20BNP	31.750	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	95.00/21591	3.70
24BNP	38.100	25.40	25.40	14.63	53.40	57.80	33.20	6.0/4.8	160.0/36364	7.10
28BNP	44.450	27.94	30.99	15.90	65.10	69.50	36.70	7.5/6.0	200.00/45455	8.50
32BNP	50.800	29.21	30.99	17.81	66.00	71.00	42.00	7.0/6.0	250.00/56818	10.25


注意: 上述规格双排链和三排链、双节距输送链系列依照要求也适合镀镍。

Note: Duplex & Triplex nickel plated chains are available in all sizes.

Double pitch nickel plated conveyor chains are available upon request.

镀锌链

Corrosion resistant/Zinc-plated chains

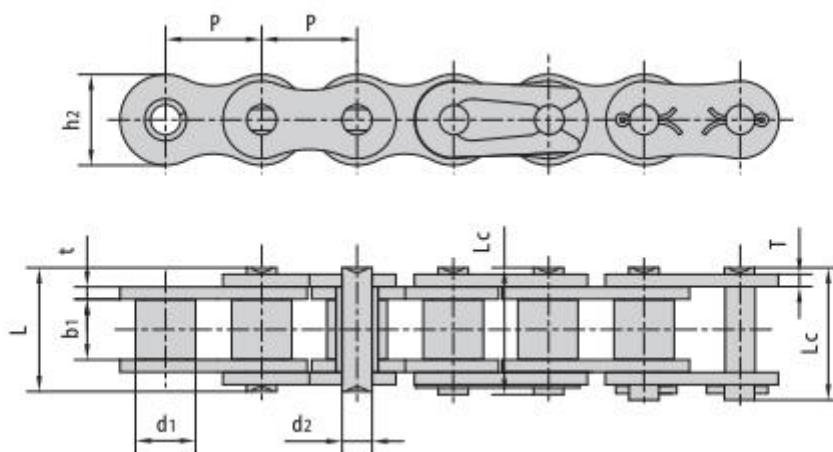


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
*25ZP	6.350	3.30	3.18	2.31	7.90	8.40	6.00	0.80	3.50/795	0.15
*35ZP	9.525	5.08	4.77	3.58	12.40	13.17	9.00	1.30	7.90/1795	0.33
41ZP	12.700	7.77	6.25	3.58	13.75	15.00	9.91	1.30	6.67/1516	0.41
40ZP	12.700	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.10/3205	0.62
50ZP	15.875	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.20/5045	1.02
60ZP	19.050	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.80/7227	1.50
80ZP	25.400	15.88	15.75	7.92	32.70	35.00	24.00	3.25	56.70/12886	2.60
100ZP	31.750	19.05	18.90	9.53	40.40	44.70	30.00	4.00	88.50/20114	3.91
120ZP	38.100	22.23	25.22	11.10	50.30	54.30	35.70	4.80	127.00/28864	5.62
140ZP	44.450	25.40	25.22	12.70	54.40	59.00	41.00	5.60	172.40/39182	7.50
160ZP	50.800	28.58	31.55	14.27	64.80	69.60	47.80	6.40	226.80/51545	10.10
04BZP	6.000	4.00	2.80	1.85	6.80	7.80	5.00	0.60	3.00/682	0.11
05BZP	8.000	5.00	3.00	2.31	8.20	8.90	7.10	0.80	5.00/1136	0.20
#06BZP	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	9.00/2045	0.41
08BZP	12.700	8.51	7.75	4.45	16.70	18.20	11.80	1.60	18.00/4091	0.69
10BZP	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	22.40/5091	0.93
12BZP	19.050	12.07	11.68	5.72	22.50	24.20	16.00	1.85	29.00/6591	1.15
16BZP	25.400	15.88	17.02	8.28	36.10	37.40	21.00	4.15/3.1	60.00/13636	2.71
20BZP	31.750	19.05	19.56	10.19	41.30	45.00	26.40	4.5/3.5	95.00/21591	3.70
24BZP	38.100	25.40	25.40	14.63	53.40	57.80	33.20	6.0/4.8	160.0/36364	7.10
28BZP	44.450	27.94	30.99	15.90	65.10	69.50	36.70	7.5/6.0	200.0/45455	8.50
32BZP	50.800	29.21	30.99	17.81	66.00	71.00	42.00	7.0/6.0	250.0/56818	10.25

注意：上述规格的双排链和三排链、双节距输送链系列依照要求也适合镀锌。

Note: Duplex&Triplex zinc plated chains are available in all sizes.

Double pitch zinc plated conveyor chains are available upon request.


0 型密封圈链 O-Ring chains

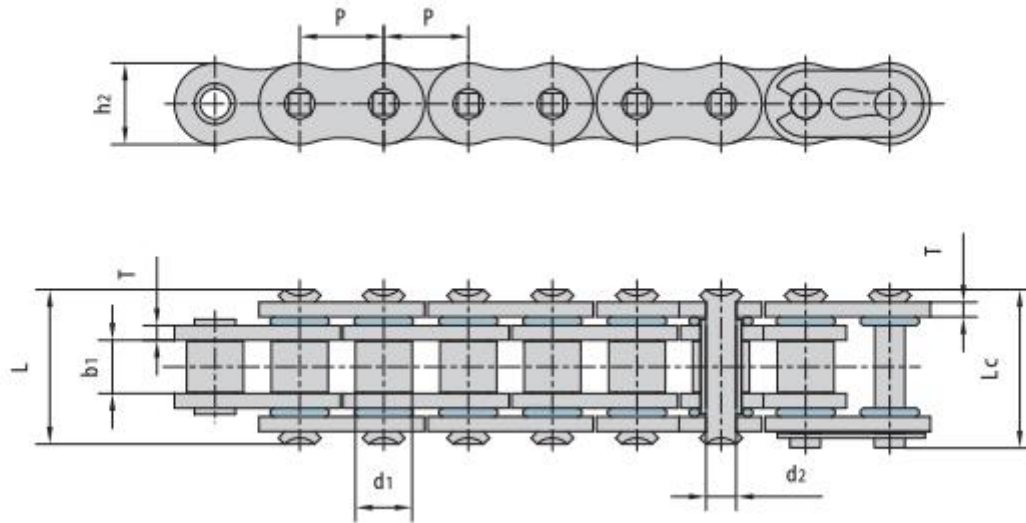

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Qo
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN
50 OR	15.875	10.16	9.40	5.08	23.10	24.80	15.09	2.03	22.2/5045	29.40
60 OR	19.050	11.91	12.57	5.94	28.50	30.40	18.00	2.42	31.8/7227	41.50
80 OR	25.400	15.88	15.75	7.92	35.60	37.30	24.00	3.25	56.7/12886	69.40
100 OR	31.750	19.05	18.95	9.53	43.30	47.00	30.00	4.00	88.5/20114	109.20
120 OR	38.100	22.23	25.22	11.11	54.00	57.50	35.70	4.80	127.0/28864	156.30
160H OR	50.800	28.58	31.55	14.27	72.06	77.30	47.80	7.20	222.4/49996	266.80
200H OR	63.500	39.68	37.85	19.85	91.60	98.50	60.00	9.50	347.0/78006	416.40
10B OR	15.875	10.16	9.65	5.08	22.00	23.30	14.70	1.70	19.0/4271	22.80
12B OR	19.050	12.07	11.68	5.72	24.90	26.80	16.00	1.85	29.0/6519	32.20
16B OR	25.400	15.88	17.02	8.28	39.50	40.90	21.00	4.15/3.10	60.0/13488	72.00
20B OR	31.750	19.05	19.56	10.19	44.50	48.50	26.40	4.50/3.50	95.0/21356	106.70
C2050-OR	31.75	10.16	9.40	5.08	23.20	24.50	15.00	2.03	-	-
C2052-OR		19.05								
C2060-OR	38.10	11.91	12.57	5.94	28.65	30.50	18.00	2.42	-	-
C2062-OR		22.23								
C2080-OR	50.80	15.88	15.75	7.92	35.05	39.00	24.00	3.25	-	-
C2082-OR		28.58								

侧弯链


Side bow chains

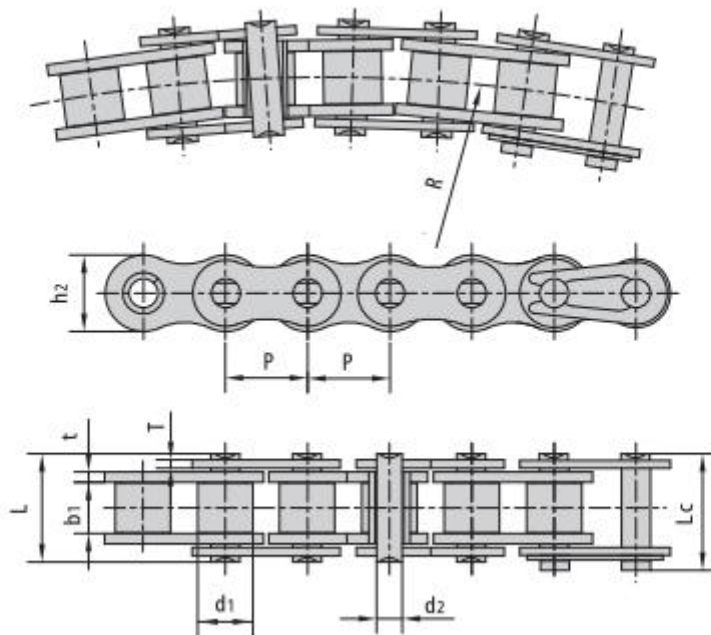

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	侧弯半径 Side bow radius	极限拉伸载荷 Ultimate tensile strength	平均拉伸载 荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	R	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/ bf	kN	kg/m
40SB	12.700	7.95	7.85	3.96	16.9	18.1	11.7	1.50	350	13.8/3136	15.20	0.80
43SB	12.700	7.95	7.85	3.45	18.3	19.5	11.7	1.50	305	12.0/2727	13.20	0.64
50SB	15.875	10.16	9.40	4.37	20.7	22.7	14.9	2.03	400	20.6/4681	22.70	1.09
60SB	19.050	11.91	12.57	5.34	26.6	28.4	18.0	2.42	500	15.7/3568	17.30	1.54
63SB	19.050	11.91	12.68	5.08	28.8	30.6	17.2	2.42/2.03	350	12.5/2840	20.00	1.40
80SB	25.400	15.88	15.75	7.19	34.0	37.3	24.0	3.25	711	40.9/9201	42.00	2.60
08BSB	12.700	8.51	7.75	3.97	17.4	18.7	11.8	1.60	400	14.0/3182	15.40	0.70
08BSBF1	12.700	8.51	7.75	3.97	16.3	17.6	11.8	1.6/1.2	400	12.8/2909	14.10	0.65
10BSB	15.875	10.16	9.65	4.50	20.1	21.5	14.7	1.70	400	15.6/3545	17.20	0.93
12BSB	19.050	12.07	11.68	5.12	23.1	24.8	16.0	1.85	500	20.5/4658	22.60	1.16
16BSB	25.400	15.88	17.22	7.90	36.5	39.7	21.0	3.7/3.0	500	55.6/12635	64.00	2.53
#C2050SB	31.750	10.16	9.40	5.08	21.3	22.6	15.0	2.03	800	21.8/4954	24.00	0.84
#C2060SB	38.100	11.91	12.57	5.08	26.8	28.8	18.0	2.42	800	21.8/4954	24.00	1.17
#C2062SB	38.100	22.23	12.57	5.34	26.6	29.0	23.0	2.42	1100	15.7/3568	17.30	2.27

带 U 型附件滚子链

Roller chains with U type attachments

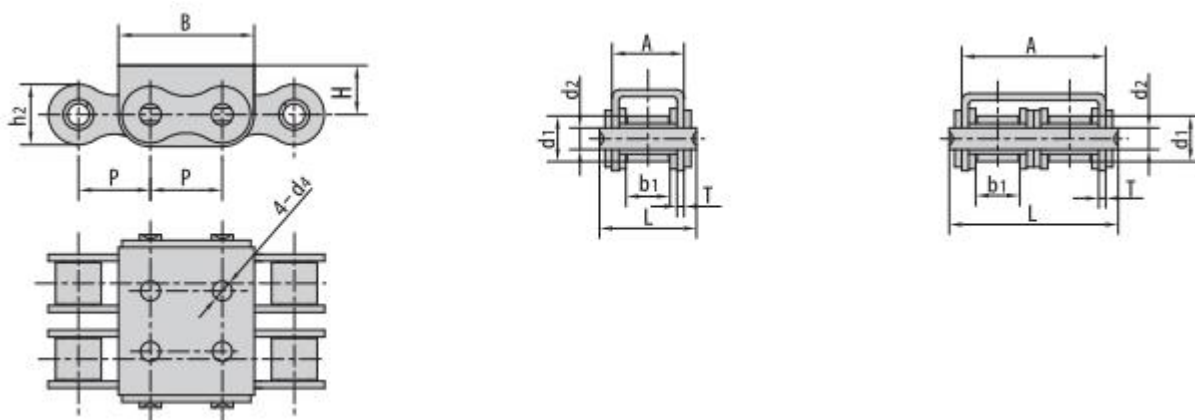


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板、附板尺寸 Plate and attachment dimension						极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	h ₂ max	A	B	H	d ₄	T	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
08B-U1	12.700	8.51	7.75	4.45	20.0	11.8	14.60	24.2	8.3	—	1.60	18.0/4091	1.13
08B-U2	12.700	8.51	7.75	4.45	34.3	11.8	28.40	24.2	8.3	—	1.50	32.0/7273	1.96
10B-U1	15.875	10.16	9.65	5.08	23.2	14.7	16.80	30.0	11.3	5.0	1.60	19.0/4318	1.53
10B-U2	15.875	10.16	9.65	5.08	39.7	14.7	33.30	30.0	11.3	5.0	1.50	44.5/10004	2.47
12B-U1	19.050	12.07	11.68	5.72	25.7	16.0	19.60	36.0	13.0	5.0	1.85	29.0/6519	1.90
12B-U2	19.050	12.07	11.68	5.72	45.3	16.0	39.10	36.0	12.0	5.0	1.85	57.8/13136	3.03
16A-U1	25.400	15.88	15.75	7.92	37.2	24.0	27.50	46.0	16.0	—	2.42	56.7/12746	3.87
16B-U1	25.400	15.88	17.02	8.28	39.7	21.0	29.05	49.0	15.4	6.0	1.60	58.0/13407	3.73
16B-U2	25.400	15.88	17.02	8.28	71.7	21.0	60.93	49.0	16.2	—	1.60	106.0/26094	6.15
20B-U1	31.750	19.05	19.56	10.19	48.0	26.4	36.00	57.0	21.0	—	3.50	85.0/19318	6.00
24B-U1	38.100	25.40	25.40	14.63	61.6	33.2	47.00	72.6	28.0	10.0	4.50	160.0/35969	10.88

注：d₄ 孔的数量和位置按产品图。

Note: the number and position of d₄ hole is as per drawing.

橡胶链


Roller chains with vulcanised elastomer profiles

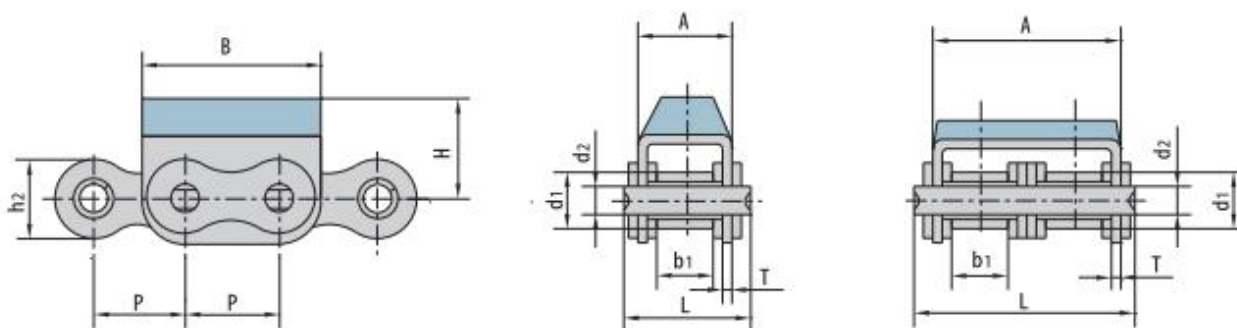

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板、附板尺寸 Plate and attachment dimension					极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	h ₂ max	A	B	H	T	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/ bf	kg/m
08B-G1	12.700	8.51	7.75	4.45	20.0	11.80	14.60	24.20	12.3	1.60	18.0/4091	1.19
08B-G2	12.700	8.51	7.75	4.45	34.3	11.80	28.40	24.20	12.3	1.50	32.0/7273	2.07
10A-G1	15.875	10.16	9.40	5.08	24.5	15.09	17.50	31.00	17.0	1.60	21.8/4953	1.70
10B-G1	15.875	10.16	9.65	5.08	23.2	14.70	16.80	30.00	17.0	1.60	19.0/4318	1.62
10B-G2	15.875	10.16	9.65	5.08	39.7	14.70	33.30	30.00	17.0	1.50	44.5/10004	2.56
10B-G2F5	15.875	10.16	9.65	5.08	39.7	14.70	33.30	30.00	25.3	1.50	44.5/10004	2.58
12B-G1	19.050	12.07	11.68	5.72	25.7	16.00	19.60	36.00	21.0	1.85	29.0/6591	2.01
12B-G2	19.050	12.07	11.68	5.72	45.3	16.00	39.10	36.00	16.0	1.85	57.8/13136	3.21
12A-G1	19.050	11.91	12.57	5.94	29.9	18.00	21.40	37.05	21.0	1.85	31.8/7153	2.55
12A-G2	19.050	11.91	12.57	5.94	52.9	18.00	44.50	37.05	21.0	1.85	62.3/14005	4.25
12AF1-G1	19.050	11.91	17.00	5.94	34.0	18.00	26.00	36.00	16.0	1.85	31.8/7153	2.62
16A-G1	25.400	15.88	15.75	7.92	37.2	24.00	27.50	46.00	20.0	2.42	42.0/9545	3.97
16A-G2	25.400	15.88	15.75	7.92	68.0	24.00	57.20	46.00	20.0	2.42	84/18896	7.27
16B-G1F12	25.400	15.88	17.02	8.28	39.7	21.00	29.05	49.00	21.4	1.60	58.0/13047	3.95
20A-G1	31.750	19.05	18.90	9.53	46.8	30.00	34.00	57.60	28.0	3.10	86.7/19503	6.15
20B-G1	31.750	19.05	19.56	10.19	48.0	26.40	36.00	57.00	27.0	3.50	85.0/19318	6.19
24B-G1	38.100	25.40	25.40	14.63	61.6	33.20	47.00	72.60	34.0	4.50	160.0/36363	11.25

橡胶链


Roller chains with vulcanised elastomer profiles

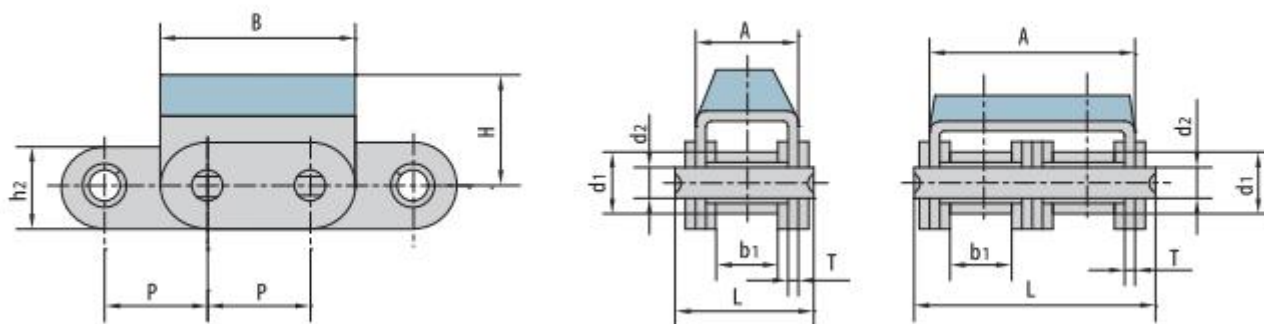

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板、附板尺寸 Plate and attachment dimension					极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	h2 max	A	B	H	T	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/ bf	kg/m
C08B-G1	12.700	8.51	7.75	4.45	20.0	11.80	14.60	24.20	12.3	1.60	18.0/4091	1.30
C08B-G2	12.700	8.51	7.75	4.45	34.3	11.80	28.40	24.20	12.3	1.50	32.0/7273	2.29
C10B-G1	15.875	10.16	9.65	5.08	23.2	14.70	16.80	30.00	17.0	1.60	19.0/4318	1.75
C10B-G1F1	15.875	10.16	9.65	5.08	23.2	14.70	16.80	30.00	13.0	1.60	19.0/4318	1.70
C50-G2F1	15.875	10.16	9.40	5.08	42.5	15.09	35.60	27.00	17.0	1.60	43.6/9906	2.14
C50-G2	15.875	10.16	9.40	5.08	42.5	15.09	35.60	31.00	17.0	1.60	43.6/9906	2.14
C10B-G2	15.875	10.16	9.65	5.08	39.7	14.70	33.30	30.00	17.0	1.50	44.5/10114	2.95
C12B-G1	19.050	12.07	11.68	5.72	25.7	16.00	19.60	36.00	21.0	1.85	29.0/6591	2.15
C12B-G2	19.050	12.07	11.68	5.72	45.3	16.00	39.10	36.00	16.0	1.85	57.8/13136	3.48
C16A-G1	25.400	15.88	15.75	7.92	37.2	24.00	27.50	46.00	20.0	2.42	42.0/9545	4.34
C16A-G2	25.400	15.88	15.75	7.92	68.0	24.00	57.20	46.00	20.0	2.42	84.0/18883	8.20
C20A-G1	31.750	19.05	18.90	9.53	46.8	30.00	34.00	61.75	28.0	3.10	86.7/19490	9.10
C20B-G1	31.750	19.05	19.56	10.19	48.0	26.40	36.00	57.00	27.0	3.50	85.0/19318	6.65
C20B-G2	31.750	19.05	29.56	10.19	85.0	26.40	73.00	58.15	27.0	3.50	170.0/38217	10.40
C24B-G1	38.100	25.40	25.40	14.63	61.6	33.20	47.00	72.60	34.0	4.50	160.0/36363	11.63



橡胶链

Roller chains with vulcanised elastomer profiles

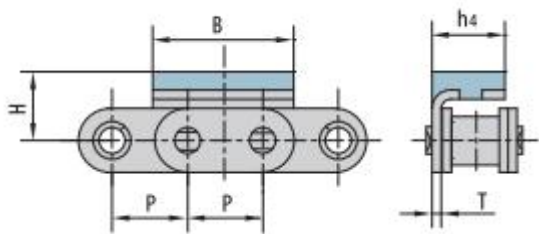


链号	P	B	H	h4	T
	mm	mm	mm	mm	mm
06BF9	9.525	17.73	9.0	9.05	1.3

链号	P	A	B	H	T
	mm	mm	mm	mm	mm
08B-G1F1	12.700	18.0	24.2	12.3	1.6
10B-G1F2	15.875	25.0	30.0	14.0	1.6
10B-G1F3	15.875	20.0	30.0	18.0	1.6
10B-G1F4	15.875	18.6	30.0	11.4	1.6

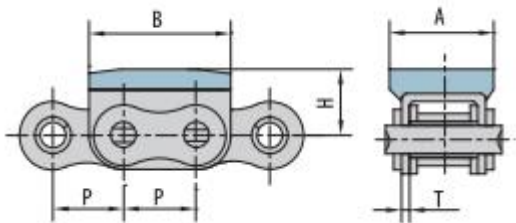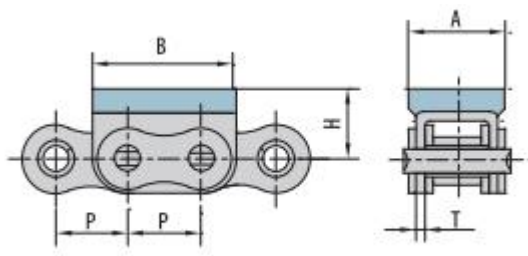


链号	P	A	B	H	T
	mm	mm	mm	mm	mm
08B-G1F4	12.7	18.0	24.2	12.3	1.6

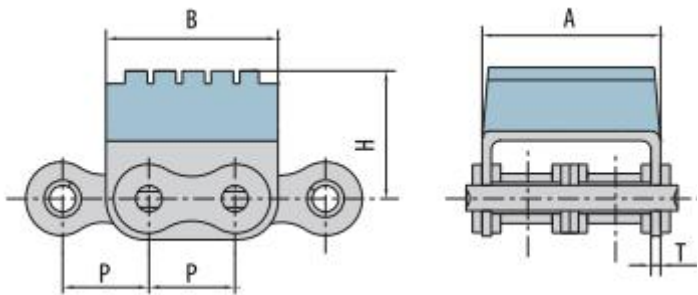


链号	P	A	B	H	T
	mm	mm	mm	mm	mm
08B-G2F10	12.70	28.4	24.2	23.3	1.50
12B-G2F6	19.05	39.1	37.3	28.2	1.85

橡胶链

Roller chains with vulcanised elastomer profiles

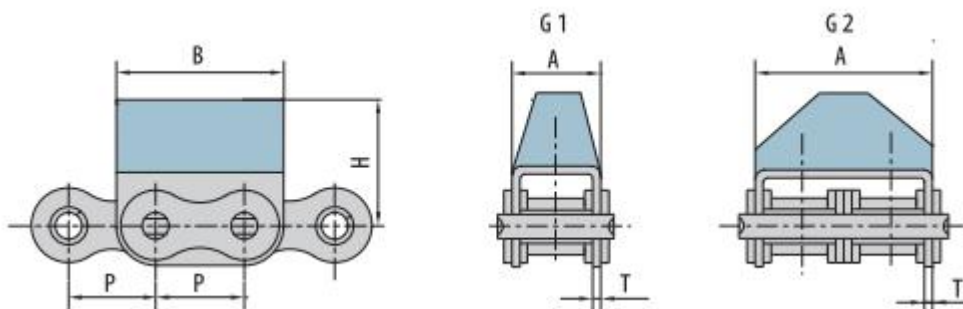


链号	P	A	B	H	T
	mm	mm	mm	mm	mm
10B-G1F5	15.875	16.80	30.0	25.3	1.70
10A-G1F6	15.875	16.80	30.0	14.0	1.60
12B-G1F11	19.050	19.60	36.0	17.0	1.85
12A-G1F12	19.050	39.10	36.0	21.0	1.85
12B-G2F10	19.050	39.10	36.0	28.0	1.85
12A-G2F12	19.050	39.10	36.0	21.0	1.85
12B-G2F5	19.050	39.10	36.0	28.0	1.85
16A-G1F1	25.400	27.50	46.0	21.4	2.42
16B-G1F18	25.400	29.05	49.0	32.0	1.60
20B-G1F1	31.750	36.00	57.0	35.0	3.50

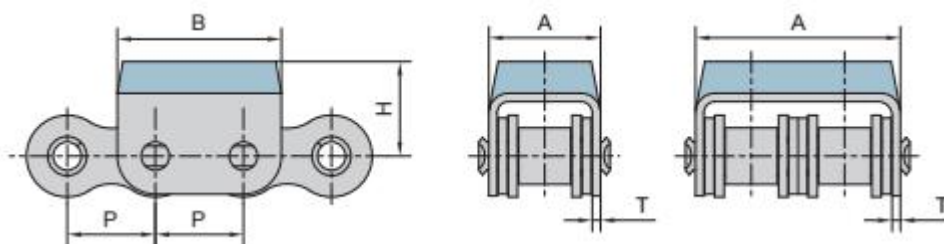


链号	P	A	B	H	T
	mm	mm	mm	mm	mm
10B-G2F1	15.875	33.3	30	17.0	1.5
24A-G1F1	38.100	55.5	70	46.5	4.8

停车库链条 Car parking chains

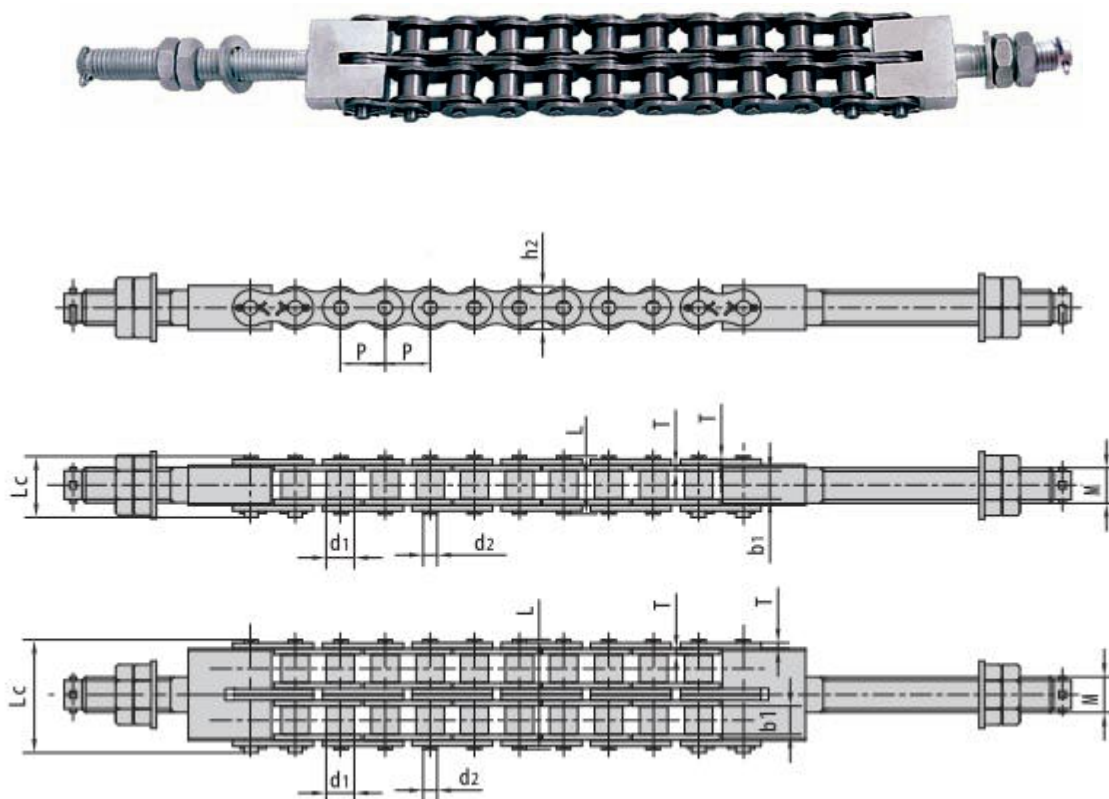

链号	节距 Pitch	滚子直 径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	螺栓规格 Bolt type	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	M	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
16ALT-1	25.40	15.88	15.75	7.92	32.7	36.5	24.0	3.25	M20	71.55/16261	81.8	2.60
16ALT-2	25.40	15.88	15.75	7.92	62.7	65.8	24.0	3.25	M20	143.10/32523	166.3	5.15
20ALT-1	31.75	19.05	18.90	9.53	40.4	44.7	30.0	4.00	M24	107.85/24511	118.6	3.91
20ALT-2	31.75	19.05	18.90	9.53	76.4	80.5	30.0	4.00	M24	215.70/49023	234.4	7.80
20ALT-3	31.75	19.05	18.90	9.53	112.2	116.3	30.0	4.00	M24	323.55/73534	351.6	11.77
24ALT-1	38.10	22.23	25.22	11.10	50.3	54.3	35.7	4.80	M30	149.20/330909	161.1	5.62
24ALT-2	38.10	22.23	25.22	11.10	95.8	99.7	35.7	4.80	M30	298.40/67818	322.2	11.70


停车库链条
Car parking chains

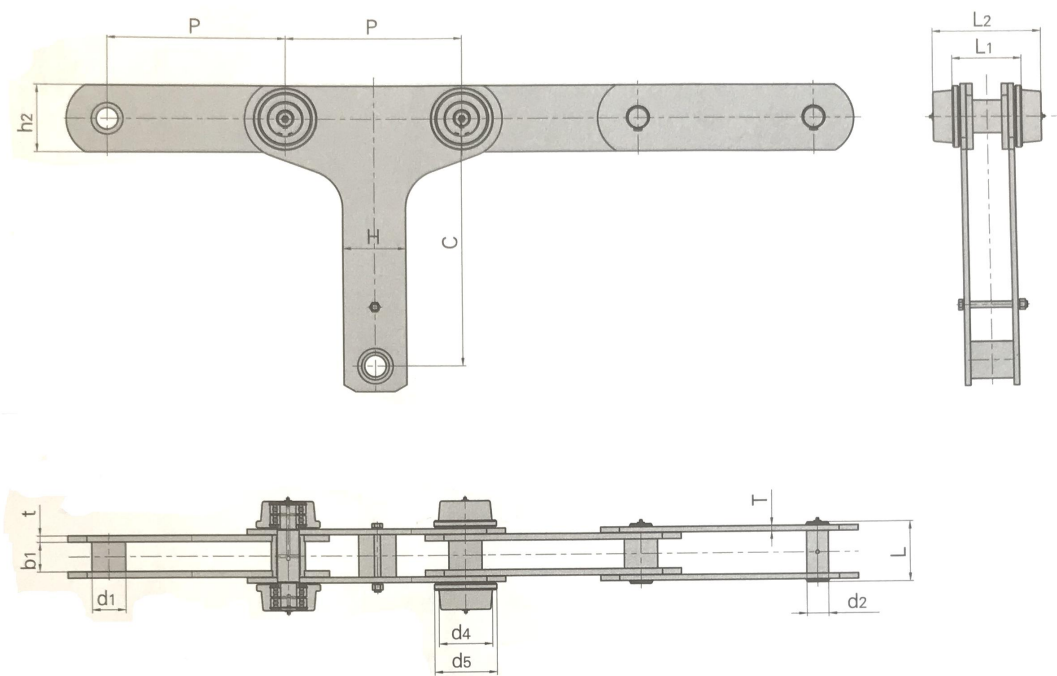

链号	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 plate depth	链板厚度 Plate thickness	套筒直径 Boush diameter	附件尺寸 Attachment dimension				抗拉强度 Tensile strength
	P	d4 max	d5 max	b1 min	d2 max	L max	h2 max	t/T max	d1 max	C	H	L1	L2	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf
P450F1	450.0	137.0	158.0	75	55	153	171	16/14	85.0	630	160	178	278	1800/404640
P450F2	450.0	136.5	180.0	75	55	174	171	16/14	85.0	675	170	166	282	1764/396547
P450F3	450.0	136.5	180.0	75	55	174	171	16/14	85.0	630	160	166	282	1764/396547

停车库链条

Car parking chains

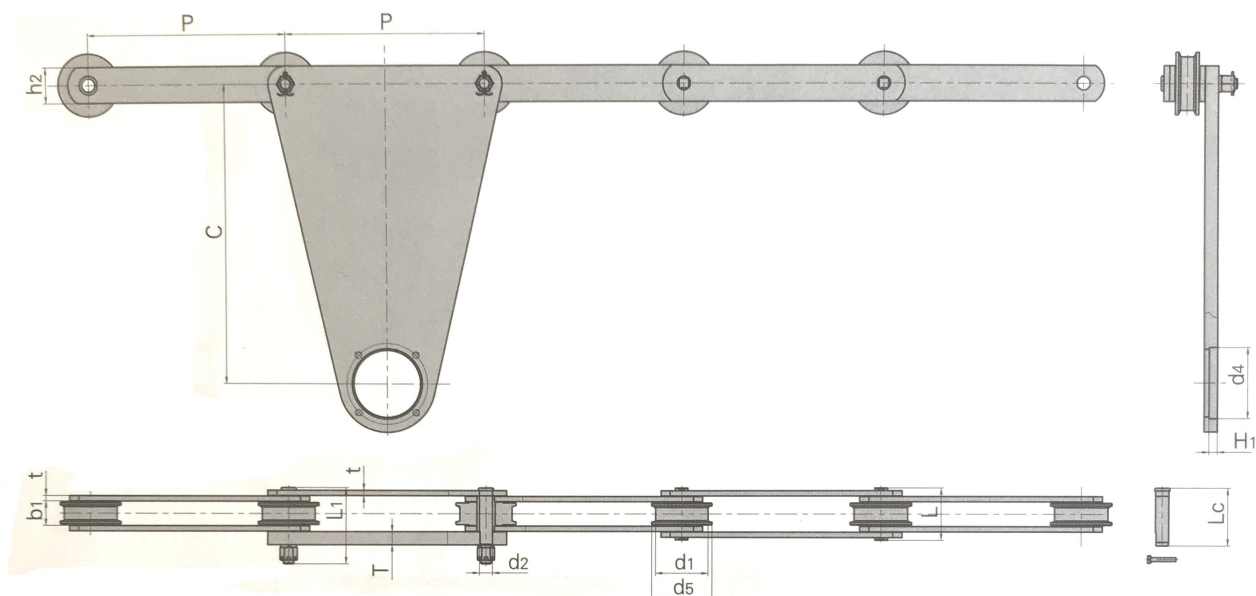


链号 Pitch	节距 Pitch		滚子直径 Roller diameter		内节内宽 Width between inner plates		销轴直径 Pin diameter		销轴长度 Pin length			链板高度 plate depth		链板厚度 Plate thickness		附件尺寸 Attachment dimension			抗拉强度 Tensile strength	
	P		d1	d5	b1		d2		L	Lc	L1	h2		t/T		C	d4	H1	Q	
	mm		max	max	min		max		max	max	max	max		max		mm	mm	mm	min	kN/lbf
P450F5	450		120	138	56		30		120	130.0	174.0	80		12/30		672	160.0	19	450/101160	
P450F6	450		120	140	84		36		150	159.0	210.0	100		12/30		672	160.0	19	800/179840	
P450F13	450		120	140	84		36		150	159.0	210.0	100		12/30		675	135.0	13	800//179840	
*P460F1	460		118	138	51		36	-	134.5	173.5	173.5	90		14/20		665	110.4	-	650.0/146120	
P460F2	460		120	140	84		36		150	159.0	202.0	100		12/25		675	135.0	13	800.0/179840	
P460F3	460		130	144	60		36		126	135.0	185.0	100		12/30		650	110.0	-	800.0/179840	
P460F5	460		100	119	55		30		118	130.0	160.0	75		12/20		570	107.0	-	650.0/146120	
*P460F4	460		118	138	51		30		142	-	165.0	90		14/20		665	110.0	-	800.0/179840	
P460F9	460		128	148	71		30		156	-	196.0	90		14/25		650	126.0	12	850.0/191000	
P460F10	460		128	148	71		30		156	-	196.0	90		14/25		650	126.0	12	850.0/191000	

*滚轮内带轴承


*with bearing inside roller

板式链
Leaf chains

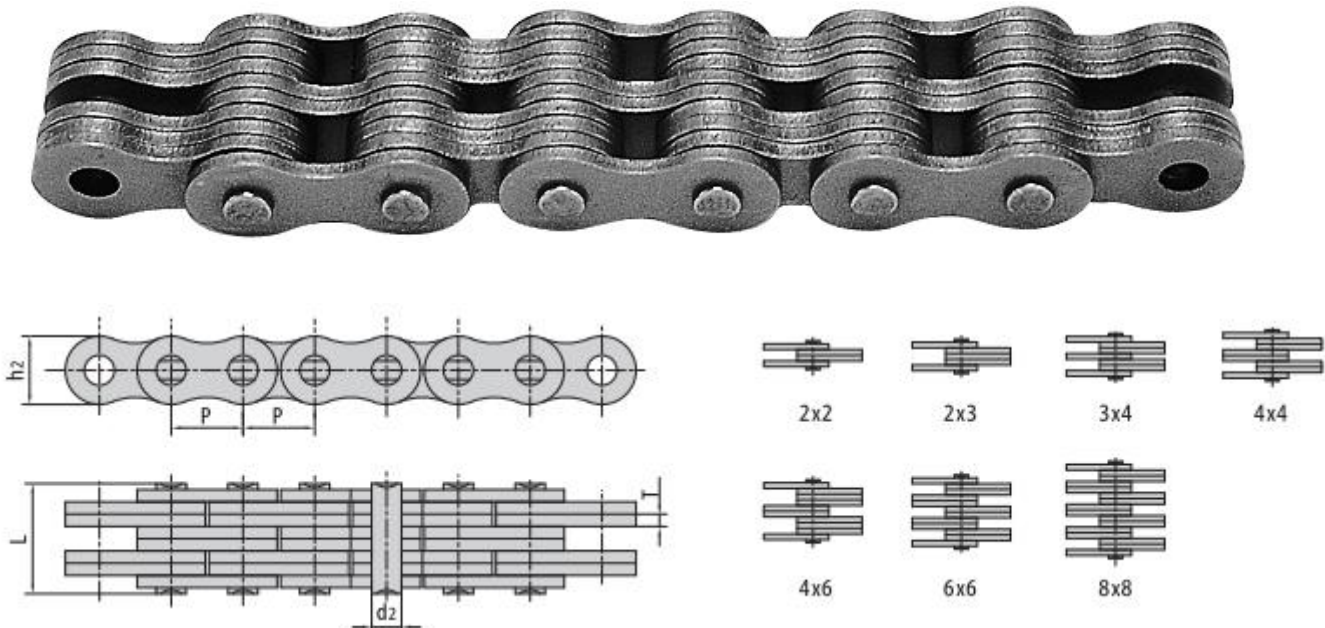


DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	链板组合 Plate lacing	链板高度 Plate depth	链板厚度 Plate thickness	销轴直径 Pin diameter	销轴长度 Pin length	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
		P		h2 max	T max	d2 max	L max	Q min	Q0	q
		mm		mm	mm	mm	mm	kN/ bf	kN	kg/m
LH0822	BL422	12. 700	2X2	12. 07	2. 08	5. 09	11. 05	22. 2/5045	27. 6	0. 60
LH0823	BL423		2X3				13. 16	22. 2/5045	27. 6	0. 75
LH0834	BL434		3X4				17. 40	33. 4/7591	41. 4	1. 05
LH0844	BL444		4X4				19. 51	44. 5/10114	56. 0	1. 20
LH0846	BL446		4X6				23. 75	44. 5/10114	56. 0	1. 46
LH0866	BL466		6X6				27. 99	66. 7/15159	81. 7	1. 77
LH0888	BL488		8X8				36. 45	89. 0/20227	109. 4	2. 32
LH1022	BL522	15. 875	2X2	15. 09	2. 42	5. 96	12. 90	33. 4/7591	43. 1	0. 90
LH1023	BL523		2X3				15. 37	33. 4/7591	43. 1	1. 10
LH1034	BL534		3X4				20. 32	48. 9/11114	65. 6	1. 50
LH1044	BL544		4X4				22. 78	66. 7/15159	84. 5	1. 80
LH1046	BL546		4X6				27. 74	66. 7/15159	84. 5	2. 20
LH1066	BL566		6X6				32. 69	100. 1/22750	125. 1	2. 65
LH1088	BL588		8X8				42. 57	133. 4/30318	169. 5	3. 50
LH1222	BL622	19. 050	2X2	18. 11	3. 25	7. 94	17. 37	48. 9/11114	68. 2	1. 50
LH1223	BL623		2X3				20. 73	48. 9/11114	68. 2	1. 80
LH1234	BL634		3X4				27. 43	75. 6/17181	102. 8	2. 50
LH1244	BL644		4X4				30. 78	97. 9/22250	136. 9	2. 90
LH1246	BL646		4X6				37. 49	97. 9/22250	136. 9	3. 60
LH1266	BL666		6X6				44. 20	146. 8/33364	214. 2	4. 30
LH1288	BL688		8X8				57. 61	195. 7/44477	217. 7	5. 80
LH1622	BL822	25. 400	2X2	24. 13	4. 00	9. 54	21. 34	84. 5/19204	108. 2	2. 40
LH1623	BL823		2X3				25. 48	84. 5/19204	108. 2	3. 00
LH1634	BL834		3X4				33. 76	129. 0/29318	170. 0	4. 20
LH1644	BL844		4X4				37. 90	169. 0/38409	214. 6	4. 80
LH1646	BL846		4X6				46. 18	169. 0/38409	214. 6	6. 00
LH1666	BL866		6X6				54. 46	253. 6/57636	324. 5	7. 20
LH1688	BL888		8X8				71. 02	338. 1/76841	432. 7	9. 60

板式链
Leaf chains

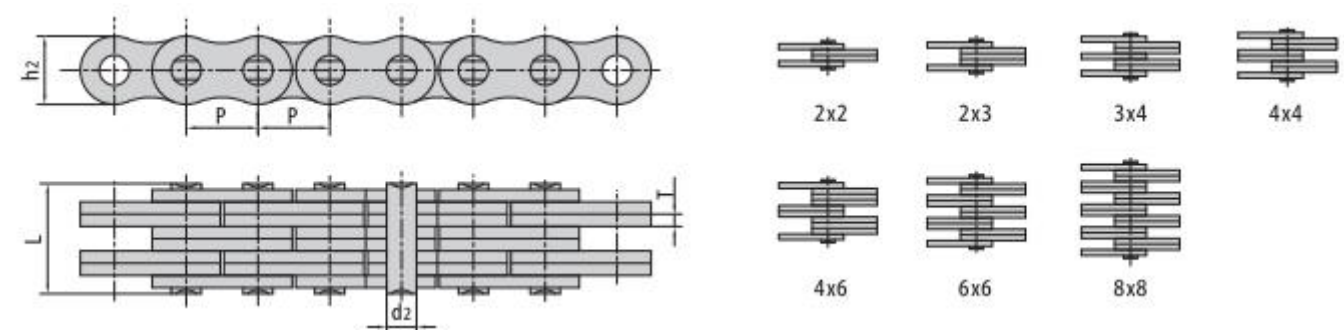

DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	链板组合 Plate lacing	链板高度 Plate depth	链板厚度 Plate thickness	销轴直径 Pin diameter	销轴长度 Pin length	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
		P		h2 max	T max	d2 max	L max	Q min	Q0	q
		mm		mm	mm	mm	mm	kN/ bf	kN	kg/m
LH2022	BL1022	31.75	2X2	30.18	4.80	11.11	25.37	115.6/26272	165.8	3.57
LH2023	BL1023		2X3				30.33	115.6/26272	165.8	4.45
LH2034	BL1034		3X4				40.23	182.4/41454	248.7	6.19
LH2044	BL1044		4X4				45.19	231.3/52568	303.6	7.04
LH2046	BL1046		4X6				55.09	231.3/52568	303.6	8.77
LH2066	BL1066		6X6				65.00	347.0/78863	433.7	10.50
LH2088	BL1088		8X8				84.81	462.6/105136	604.1	14.00
LH2422	BL1222	38.10	2X2	36.20	5.60	12.71	29.62	151.2/34363	192.0	4.96
LH2423	BL1223		2X3				35.43	151.2/34363	192.0	6.16
LH2434	BL1234		3X4				47.07	244.6/55591	315.9	8.55
LH2444	BL1244		4X4				52.88	302.5/68750	381.1	9.76
LH2446	BL1246		4X6				64.52	302.5/68750	381.1	12.16
LH2466	BL1266		6X6				76.15	453.7/103113	543.6	14.61
LH2488	BL1288		8X8				99.42	605.0/137500	726.0	19.36
LH2822	BL1422	44.45		42.24	6.40	14.29	33.55	191.3/43477	225.7	6.89
LH2823	BL1423		2X3				40.16	191.3/43477	225.7	8.55
LH2834	BL1434		3X4				53.37	315.8/71772	448.3	11.61
LH2844	BL1444		4X4				59.97	382.6/86954	451.2	13.24
LH2846	BL1446		4X6				73.18	382.6/86954	451.2	16.51
LH2866	BL1466		6X6				86.39	578.3/131431	682.4	19.79
LH2888	BL1488		8X8				112.80	765.1/173886	902.8	26.35
LH3222	BL1622	50.80	2X2	48.26	7.20	17.46	39.01	289.1/65704	341.1	8.78
LH3223	BL1623		2X3				46.58	289.1/65704	341.1	10.90
LH3234	BL1634		3X4				61.72	440.4/100091	519.6	15.15
LH3244	BL1644		4X4				69.29	573.8/131431	680.4	17.27
LH3246	BL1646		4X6				84.43	573.8/131431	680.4	21.53
LH3266	BL1666		6X6				99.57	857.4/194836	1000.7	25.88
LH3288	BL1688		8X8				129.84	1156.5/262841	1364.6	34.29
LH4022	BL2022	63.50	2X2	60.33	9.91	23.81	51.74	433.7/98568	511.7	15.95
LH4023	BL2023		2X3				61.70	433.7/98568	511.7	19.78
LH4034	BL2034		3X4				81.61	649.4/147590	766.2	27.46
LH4044	BL2044		4X4				91.57	867.4/197163	1023.5	31.34
LH4046	BL2046		4X6				111.48	867.4/197163	1023.5	39.01
LH4066	BL2066		6X6				131.39	1301.1/295704	1535.2	46.63
LH4088	BL2088		8X8				171.22	1734.8/394272	2046.5	62.00


板式链
Leaf chains

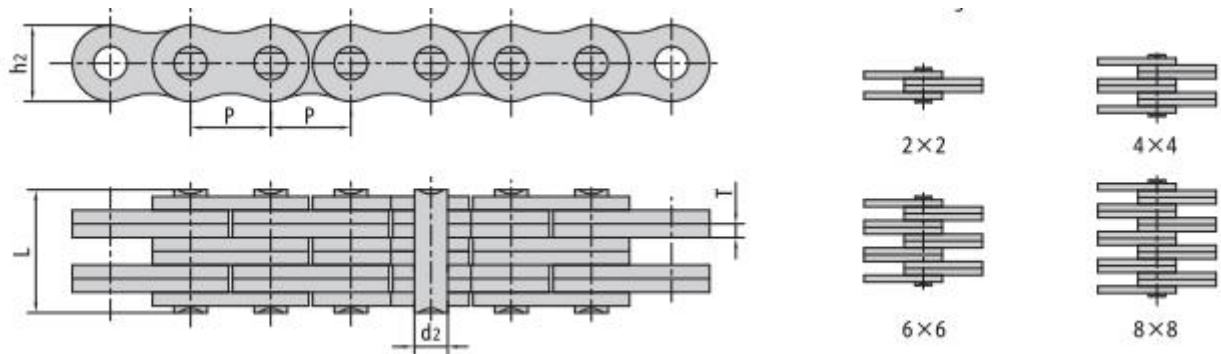

DIN/ISO 链号 DIN/ISO Chain No.	节距 Pitch	链板组合 Plate lacing	链板高度 Plate depth	链板厚度 Plate thickness	销轴直径 Pin diameter	销轴长度 Pin length	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P		h2 max	T max	d2 max	L max	Q min	Q0	q
	mm		mm	mm	mm	mm	kN/ bf	kN	kg/m
LL0822	12. 700	2X2	10. 6	1. 6	4. 45	8. 9	18. 2/4094	20. 4	0. 42
LL0844		4X4				15. 6	36. 4/8188	40. 7	0. 84
LL0866		6X6				22. 0	54. 6/12283	60. 0	1. 24
LL0888		8X8				28. 5	72. 8/16378	80. 0	1. 64
LL1022	15. 875	2X2	13. 7	1. 6	5. 08	9. 2	22. 7/5107	25. 5	0. 54
LL1044		4X4				15. 8	45. 4/10213	51. 0	1. 06
LL1066		6X6				22. 1	68. 1/15321	76. 3	1. 57
LL1088		8X8				28. 8	90. 8/20427	101. 9	2. 10
LL1222	19. 050	2X2	16. 0	1. 85	5. 72	10. 4	29. 5/6637	33. 2	0. 73
LL1244		4X4				17. 9	59. 0/13273	66. 4	1. 44
LL1266		6X6				25. 4	88. 5/19910	99. 7	2. 15
LL1288		8X8				32. 9	118. 0/26547	132. 9	2. 84

板式链


Leaf chains

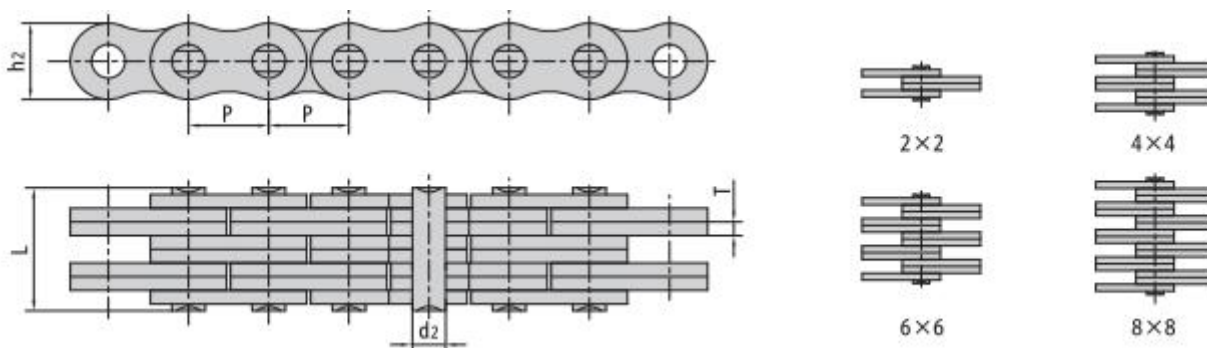

DIN/ISO 链号 DIN/ISO Chain No.	节距 Pitch	链板组合 Plate lacing	链板高度 Plate depth	链板厚度 Plate thickness	销轴直径 Pin diameter	销轴长度 Pin length	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P		h2 max	T max	d2 max	L max	Q min	Q0	q
	mm		mm	mm	mm	mm	kN/ bf	kN	kg/m
LL1622	25.40	2X2	21.00	3.10	8.28	17.2	58.0/13182	76.3	1.52
LL1644		4X4				29.6	116.0/26363	152.6	2.90
LL1666		6X6				42.4	174.0/39545	228.9	4.30
LL1688		8X8				54.9	232.0/52726	305.2	5.71
LL2022	31.75	2X2	26.40	3.70	10.19	20.1	95.0/21591	109.2	2.33
LL2044		4X4				33.8	190.0/43182	218.5	4.40
LL2066		6X6				50.1	285.0/64773	324.6	6.79
LL2088		8X8				64.0	380.0/86363	435.1	8.90
LL2422	38.10	2X2	33.40	5.00	14.63	28.4	170.0/38363	195.5	4.47
LL2444		4X4				46.3	340.0/77273	380.8	8.22
LL2466		6X6				66.4	510.0/115909	571.2	12.22
LL2488		8X8				86.6	680.0/154545	775.2	16.30
LL2822	44.45	2X2	37.08	6.00	15.90	32.2	200.0/45455	245.0	5.40
LL2844		4X4				56.4	400.0/90909	490.0	10.53
LL2866		6X6				80.8	600.0/136363	735.0	15.68
LL2888		8X8				105.2	800.0/181818	980.0	20.83
LL3222	50.80	2X2	42.00	6.40	17.18	34.8	260.0/59091	291.2	6.39
LL3244		4X4				60.6	520.0/118182	582.4	12.46
LL3266		6X6				86.4	780.0/177272	873.6	18.52
LL3288		8X8				112.2	1040.0/233970	1176.0	24.65
LL4022	63.50	2X2	52.76	8.00	22.89	42.2	360.0/81818	403.2	10.36
LL4044		4X4				74.4	780.0/177273	873.6	20.22
LL4066		6X6				106.5	1080.0/245454	1209.6	30.07
LL4088		8X8				140.0	1440.0/323959	1747.2	39.98
LL4822	76.20	2X2	63.88	10.00	29.24	54.6	560.0/127272	627.2	15.94
LL4844		4X4				92.6	1120.0/254545	1554.4	31.38
LL4866		6X6				133.4	1680.0/377953	1880.0	46.94
LL4888		8X8				174.2	2240.0/509091	2508.8	62.36


多板销轴链

Multiple plate bearing pin chains

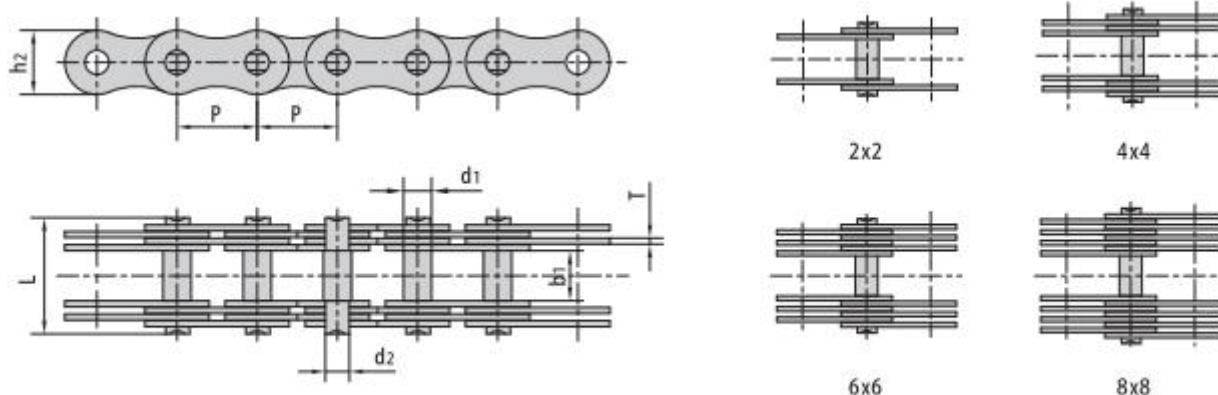


链号	节距 Pitch	内节内宽 Width between inner plates	链板组合 Plate lacing	销轴直径 Pin diameter		销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	b1 min		d1 max	d2 max	L max	h2 max	T max	Q min	q
	mm	mm		mm	mm	mm	mm	mm	kN/ bf	kg/m
MP15	15	12	2×2	5	4	25	12	2.03	5.0/1125	0.7
MP20	20	15	2×2	8	6	28	15	2.03	12.5/2812	1.1
MP25	25	18	2×2	10	8	36	18	3.00	25.0/5624	1.8
MP30	30	20	4×4	11	9	51	20	3.00	40.0/8999	3.4
MP35	35	22	4×4	12	10	53	26	3.00	60.0/13498	4.5
MP40	40	25	4×4	14	12	58	32	3.00	80.0/17998	5.0
MP45	45	30	4×4	17	14	63	35	3.00	100.0/22497	7.0
MP50	50	35	4×4	22	18	90	40	4.50	150.0/33746	11.3
MP55	55	40	4×4	24	21	108	42	6.00	200.0/44994	14.5
MP60	60	45	4×4	26	23	114	46	6.00	250.0/56243	17.1
MP70	70	50	6×6	32	28	148	55	6.00	375.0/84364	34.0
MP80	80	60	6×6	36	32	159	60	6.00	500.0/112486	39.0
MP90	90	70	6×6	40	36	184	70	7.00	750.0/168728	53.0
MP100	100	80	8×8	45	40	224	80	7.00	1000.0/224972	77.0
MP110	110	90	8×8	50	45	236	90	7.00	1250.0/281215	90.0
MP120	120	100	8×8	55	50	262	100	8.00	1500.0/337458	112.0


尖齿链
Sharp top chains

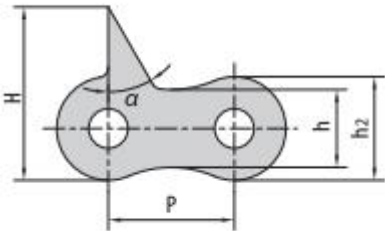


链号	P	h	h2	H	α
	mm	mm	mm	mm	
08A-D2-F1	12.7	7.8	10.4	17.4	30°
08AF34	12.7	7.8	10.4	17.9	30°



链号	P	h1	h2	h	A	α
	mm	mm	mm	mm	mm	
08BF21	12.7	3.0	10.6	15.0	3.0	12°




链号	P	R	H	A
	mm	mm	mm	mm
08BF44	12.7	5.3	16.30	23.30
08AF8	12.7	5.2	16.13	21.34




链号	P	C	H	α	β
	mm	mm	mm		
428HJF1	12.7	21.5	36.15	90°	18°
428HJF2	12.7	14.5	33.60	90°	34°

尖齿链


Sharp top chains

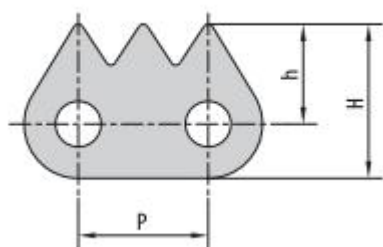

链号	P	h	H
	mm	mm	mm
08BF71	12.7	9.75	15.05

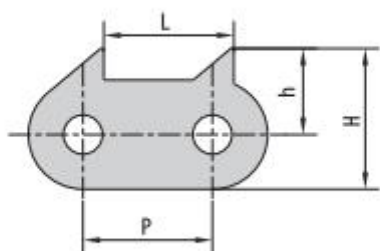

链号	P	h	H	L
	mm	mm	mm	mm
C12B-9010	19.05	13.0	21.0	19.05
C12B-940	19.05	13.2	22.3	19.75
C16B-1160	25.40	10.5	27.5	25.40
C16B-1161	25.40	10.5	27.5	25.40
C16A-1160	25.40	18.0	29.5	25.40

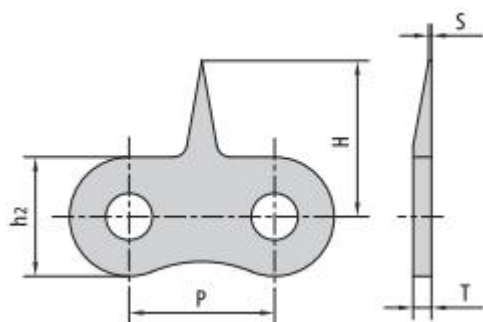


链号	P	h2	H	S	T
	mm	mm	mm	mm	mm
08AF29	12.700	10.60	15.6	-	1.50
08BF90	12.700	10.60	17.0	0.3	1.60
10AF15	15.875	15.09	17.0	-	2.03
10AF2	15.875	13.00	17.0	0.3	2.03
10AF23	15.875	13.00	20.8	0.3	2.03
10AF48	15.875	13.00	16.9	-	2.03
10BF50	15.875	13.70	17.0	0.3	1.70

塑料链

Plastic chains

工程塑料内链节轻型输送链

Engineering plastic inner link light-duty conveyor chains

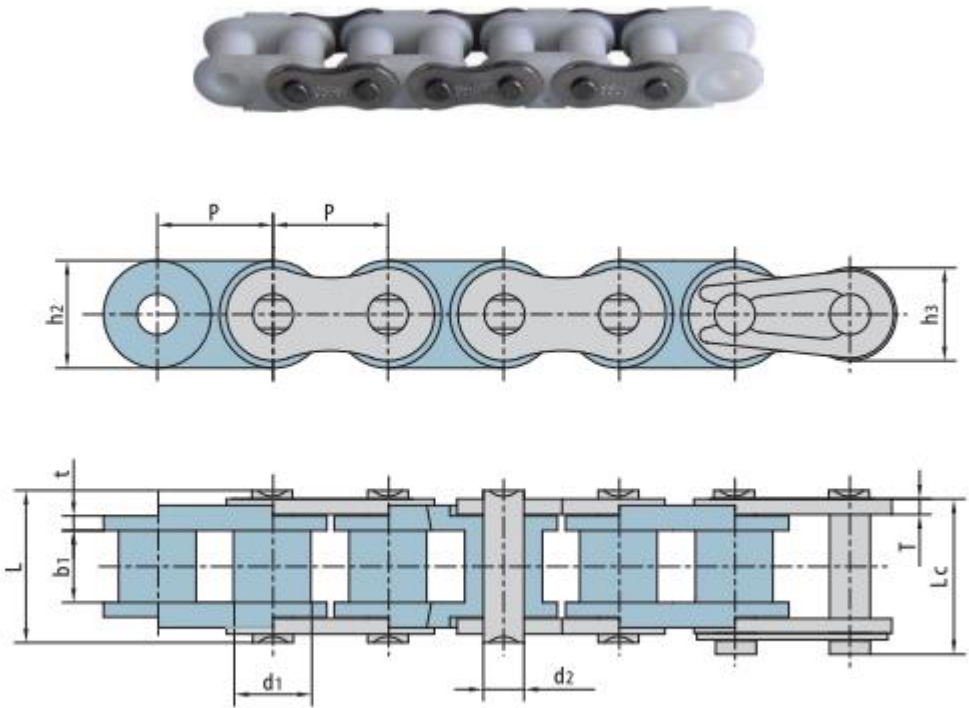


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Inner plate depth		链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	h3 max	t / T	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf
04CPSa	6.350	3.30	3.10	2.31	7.9	8.4	6.0	5.06	0.80	0.6/136
06CPSa	9.525	5.08	4.68	3.58	12.4	13.2	9.0	7.80	1.30	1.1/250
08APSa	12.700	7.92	7.85	3.96	16.6	17.8	12.0	10.40	1.50	2.5/568
10APSa	15.875	10.16	9.40	5.08	20.7	22.2	15.1	13.00	2.03	3.5/795
12APSa	19.050	11.91	12.57	5.94	25.9	27.7	18.0	15.60	2.42	4.5/1023
16APSa	25.400	15.88	15.75	7.92	32.7	35.0	24.0	20.50	3.25	7.5/1023
08BPSa	12.700	8.51	7.75	4.45	16.7	18.2	11.8	10.60	1.60	2.5/568
10BPSa	15.875	10.16	9.65	5.08	19.5	20.9	14.7	13.70	1.70	2.8/629
12BPSa	19.050	12.07	11.68	5.72	22.5	24.2	16.0	15.00	1.85	4.2/1023
16BPSa	25.400	15.88	17.02	8.28	36.1	37.4	21.0	21.00	4.15/3.10	7.5/1023

塑料链

Plastic chains

工程塑料内链节轻型输送带链

Engineering plastic inner link light-duty conveyor chain

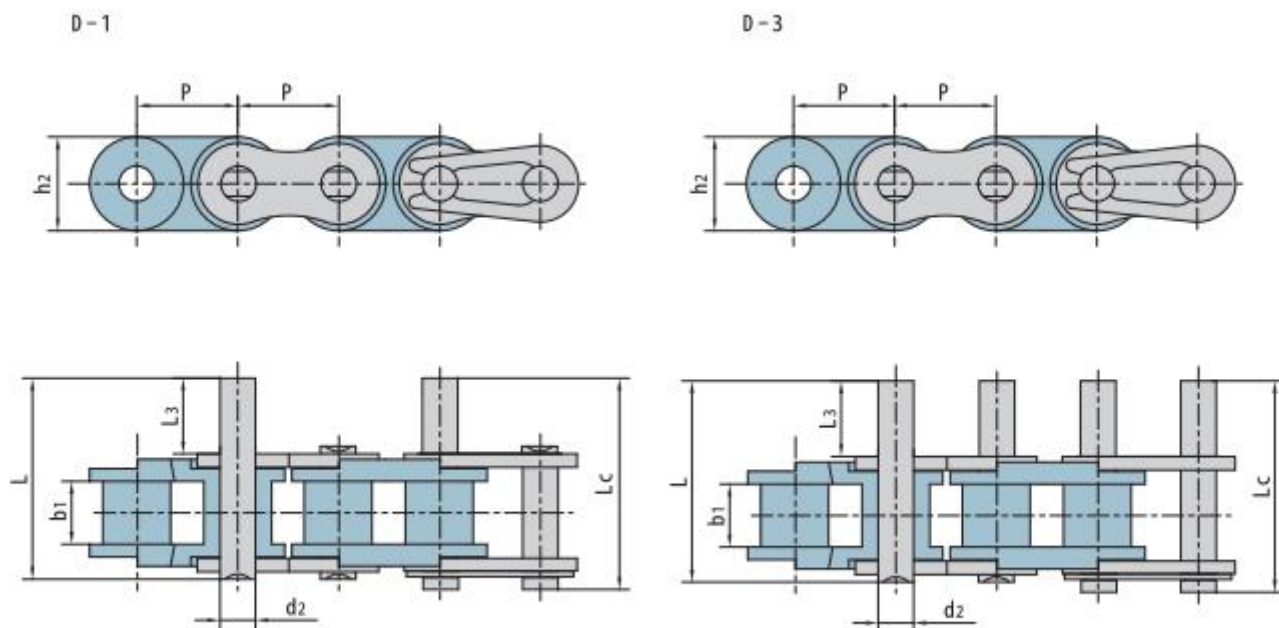


链号	P	b1	d2	h2	L3	L	Lc
	mm	mm	mm	mm	mm	mm	mm
06CPSa	9.525	4.68	3.58	9.0	9.5	20.8	21.6
08APSa	12.700	7.85	3.96	12.0	9.5	25.1	26.2
10APSa	15.875	9.40	5.08	15.1	11.9	31.3	33.1
12APSa	19.050	12.57	5.94	18.0	14.3	38.6	40.6
16APSa	25.400	15.75	7.92	24.0	19.1	50.3	53.3
08BPSa	12.700	7.75	4.45	11.8	9.5	25.1	26.6
10BPSa	15.875	9.65	5.08	14.7	11.9	30.1	31.5
12BPSa	19.050	11.68	5.72	16.0	14.3	35.4	37.1
16BPSa	25.400	17.02	8.28	21.0	19.1	53.0	54.3

倍速链

Double plus chains

钢制滚子型
Steel roller type

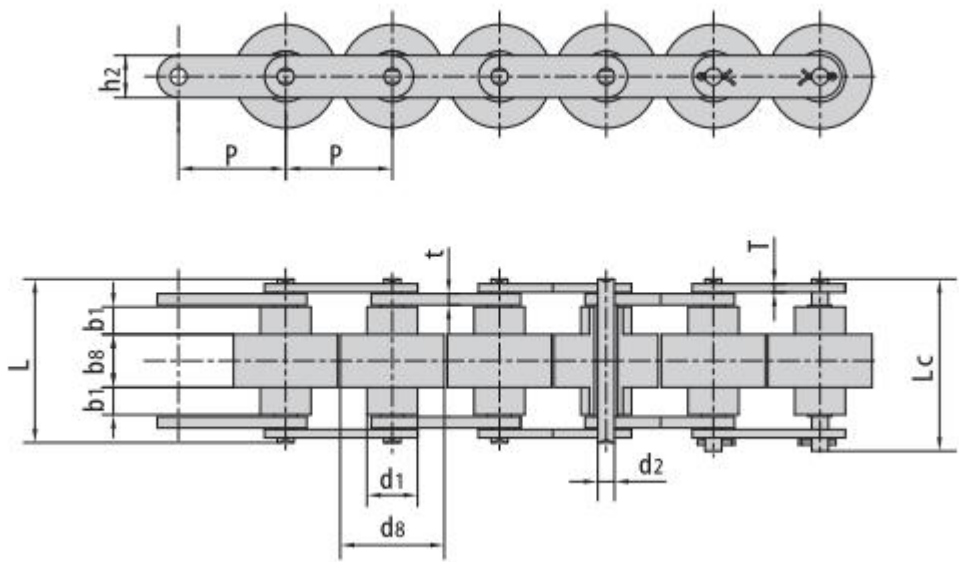



链号 Chain No.	节距 Pitch	滚子尺寸 Roller dimension				销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension			每米长重 Weight Per meter
	P	d1 max	d8 max	b1 min	b8 max	d2 max	L max	Lc max	h2 max	T max	t max	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/m
BS25-C206BR	19.05	11.91	18.3	4.00	8.0	3.28	24.0	25.6	8.20	1.30	1.50	1.45
BS25-C208AR	25.40	15.88	24.6	5.70	10.3	3.96	31.0	32.8	11.70	1.50	1.50	2.60
BS25-C210AR	31.75	19.05	30.6	7.10	13.0	5.08	39.5	41.2	15.00	2.03	2.03	3.80
BS25-C212AR	38.10	22.23	36.6	8.50	15.5	5.94	48.8	51.5	18.00	3.25	3.25	5.60
BS25-C216AR	50.80	28.58	49.0	11.00	21.5	7.92	66.2	70.0	24.00	4.00	5.00	10.53
BS30-C206BR	19.05	9.00	18.3	4.50	9.1	3.28	26.3	29.6	7.28	1.30	1.50	1.52
BS30-C208AR	25.40	11.91	24.6	6.10	12.5	3.96	35.6	39.5	9.60	1.50	2.00	2.73
BS30-C210AR	31.75	14.80	30.6	7.50	15.0	5.08	43.0	47.1	12.20	2.00	2.40	4.00
BS30-C212AR	38.10	18.00	37.0	9.75	20.0	5.94	58.1	62.7	15.00	3.00	4.00	5.88
BS30-C216AR	50.80	22.23	49.0	12.00	25.2	7.92	71.9	77.3	18.60	4.00	5.00	11.06

倍速链

Double plus chains

塑料滚子型


Plastic roller type

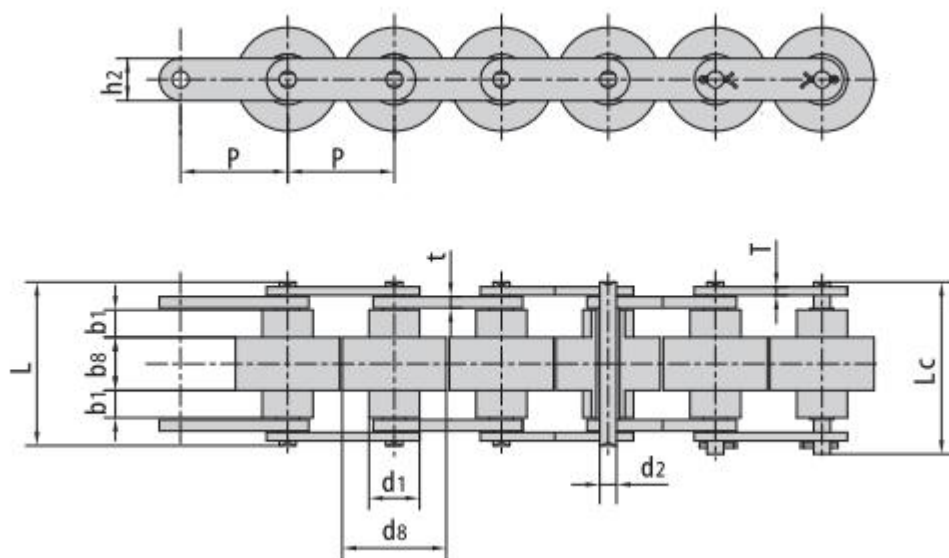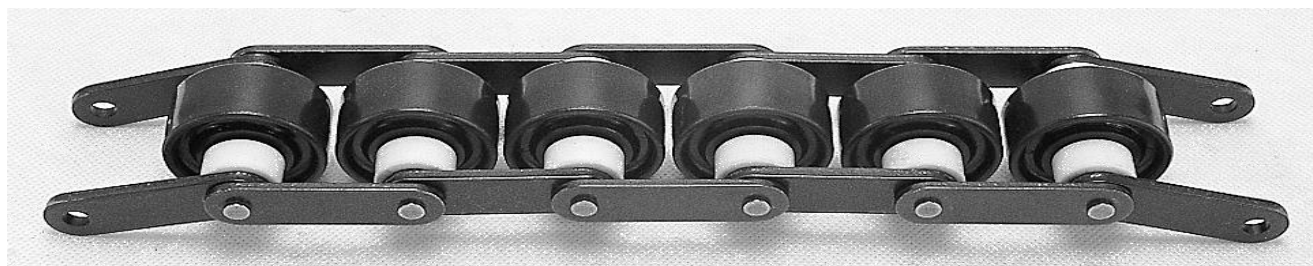

链号	节距 Pitch	滚子尺寸 Roller dimension				销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension			每米长重 Weight Per meter
	P	d1 max	d8 max	b1 min	b8 max	d2 max	L max	Lc max	h2 max	T max	t max	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg/m
BS25-C206B	19.05	11.91	18.3	4.00	8.0	3.28	24.0	25.6	8.20	1.30	1.50	0.52
BS25-C208A	25.40	15.88	24.6	5.70	10.3	3.96	31.0	32.8	11.70	1.50	1.50	0.79
BS25-C210A	31.75	19.05	30.6	7.10	13.0	5.08	39.5	41.2	15.00	2.03	2.03	1.36
BS25-C212A	38.10	22.23	36.6	8.50	15.5	5.94	48.8	51.5	18.00	3.25	3.25	2.19
BS25-C216A	50.80	28.58	49.0	11.00	21.5	7.92	66.2	70.0	24.00	4.00	5.00	4.06
BS30-C206B	19.05	9.00	18.3	4.50	9.1	3.28	26.3	29.6	7.28	1.30	1.50	0.50
BS30-C208A	25.40	11.91	24.6	6.10	12.5	3.96	35.6	39.5	9.60	1.50	2.00	0.83
BS30-C210A	31.75	14.80	30.6	7.50	15.0	5.08	43.0	47.1	12.20	2.00	2.40	1.27
BS30-C212A	38.10	18.00	37.0	9.75	20.0	5.94	58.1	62.7	15.00	3.00	4.00	2.14
BS30-C216A	50.80	22.23	49.0	12.00	25.2	7.92	71.9	77.3	18.60	4.00	5.00	3.55

带顶滚轮短节距输送链


Short pitch conveyor chains with top rollers

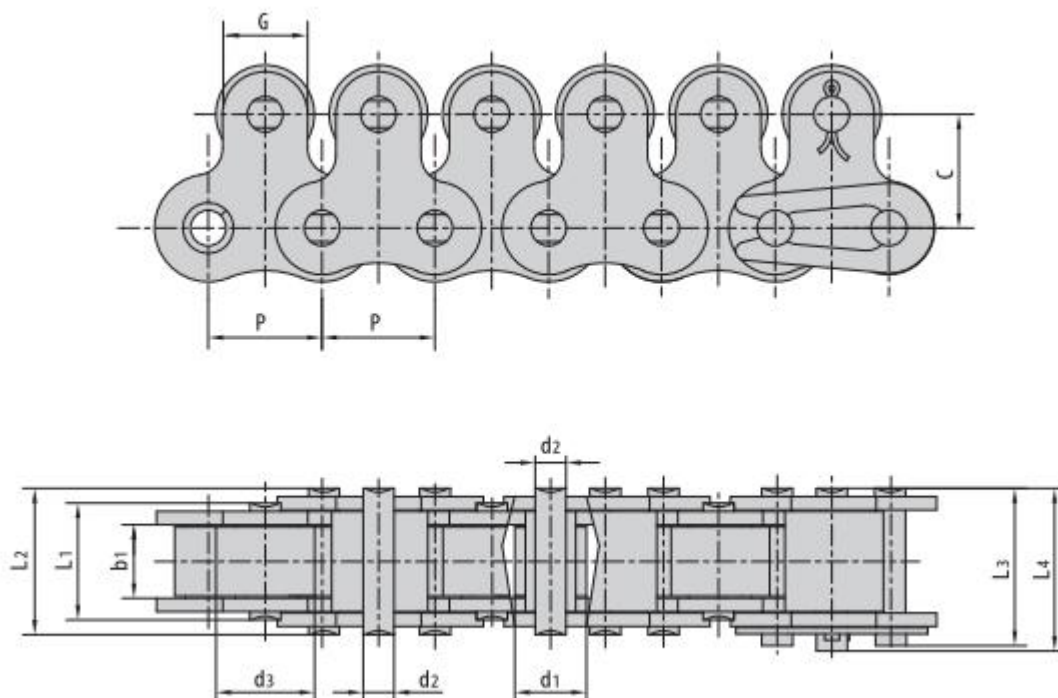

链号	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length				附板尺寸 Attachment dimension		极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d1 max	d3 max	b1 min	d2 max	L1 max	L2 max	L3 max	L4 max	G	C	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
TR08A	12.700	7.95	11.0	7.85	3.96	13.5	16.6	17.8	18.8	9.5	12.7	14.1/3250	1.44
TR10A	15.875	10.16	15.0	9.40	5.08	16.5	20.7	22.2	23.3	12.7	15.9	22.2/5405	2.30
TR12A	19.050	11.91	18.0	12.57	5.94	21.0	25.9	27.7	28.3	15.9	18.3	31.8/7227	3.40
TR16A	25.400	15.88	24.0	15.75	7.92	26.2	32.7	35.0	36.5	19.1	24.6	56.7/12886	5.90
TR20A	31.750	19.05	30.0	18.90	9.53	32.3	40.4	44.7	44.7	25.4	31.8	88.5/20114	8.90

带顶滚轮双节距输送链


Double pitch conveyor chains with top rollers

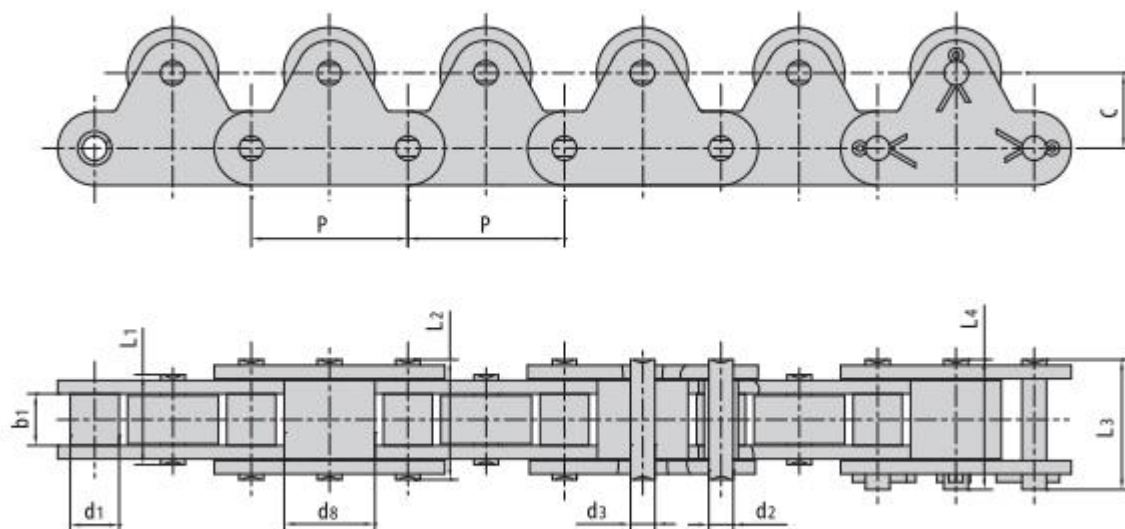

链号	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length				附件尺寸 Attachment dimension		极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d1 max	d8 max	b1 min	d2 max	L1 max	L2 max	L3 max	L4 max	C	d3	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/ bf	kg/m
TRC208A	25.40	7.95	15.88	7.85	3.96	13.5	16.6	17.8	18.8	12.7	3.96	14.1/3205	1.31
TRC210A	31.75	10.16	19.05	9.40	5.08	16.5	20.7	22.2	23.3	15.9	5.08	22.2/5045	2.03
TRC212A	38.10	11.91	22.23	15.57	5.94	21.0	25.9	27.7	28.3	18.3	5.94	31.8/7227	2.89
TRC216A	50.80	15.88	28.58	15.75	7.92	26.2	32.7	35.0	36.5	29.0	11.5	56.7/12886	4.54
TRC220A	63.50	19.05	39.67	18.90	9.53	32.3	40.4	44.7	44.7	35.4	14.5	88.5/20114	7.72

带侧滚轮输送链


Conveyor chains with outboard rollers

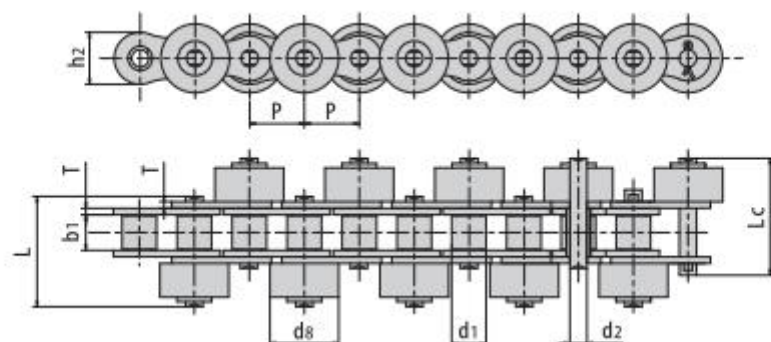

链号	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长度 Weight per meter
	P	d1 max	d8 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
*40S	12.700	7.95	15.88	7.85	3.96	25.8	27.0	12.0	1.50	13.8/3102	17.5	0.9
40-PSR	12.700	7.95	15.88	7.85	3.96	25.8	27.0	12.0	1.50	13.8/3102	17.5	1.6
50-SR-C	15.875	10.16	19.05	9.40	5.08	31.8	34.0	15.1	2.03	21.8/4900	29.4	2.4
*60S	19.050	11.91	22.23	12.57	5.94	40.0	42.5	18.0	2.42	31.8/7227	41.5	1.9
*80S	25.400	15.88	28.58	15.75	7.92	51.3	54.3	24.0	3.25	56.7/12886	69.4	3.6
80S-C	25.400	15.88	28.58	15.75	7.92	51.3	54.3	24.0	3.25	56.7/12886	69.4	5.8

注： *表示滚子材料为塑料。


Note: * means roller made in plastic.

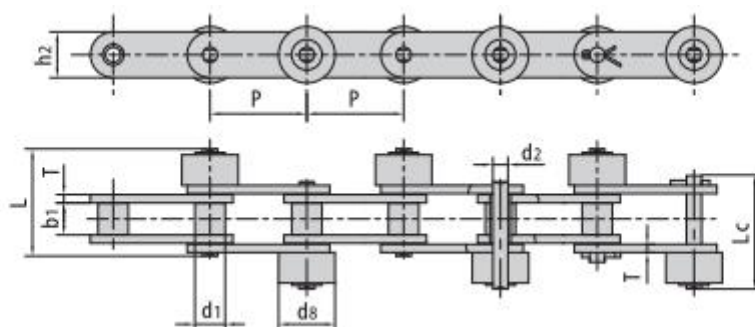


链号	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	d8 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
C2040S2-PSR	25.40	7.95	15.88	7.85	3.96	25.8	27.0	12.0	1.50	13.8/3137	15.18	0.99
C2050S	31.75	10.16	19.05	9.40	5.08	31.8	34.0	15.0	2.03	21.8/4955	23.90	1.52
C2052SF1	31.75	19.05	27.00	9.40	5.08	35.0	37.3	15.0	2.03	21.8/4955	23.90	3.06
*C2060HS	38.10	11.91	22.23	12.57	5.94	44.0	46.6	18.0	3.25	31.1/7069	42.70	1.78
C2082HSF2	50.80	28.58	40.00	15.75	7.92	54.6	57.8	24.0	4.00	55.6/12500	69.40	6.64
*C2100HS-P	63.50	19.05	39.69	18.90	9.53	65.3	68.6	30.0	4.80	86.7/19490	109.20	4.44

带侧滚轮输送链

Conveyor chains with outboard rollers

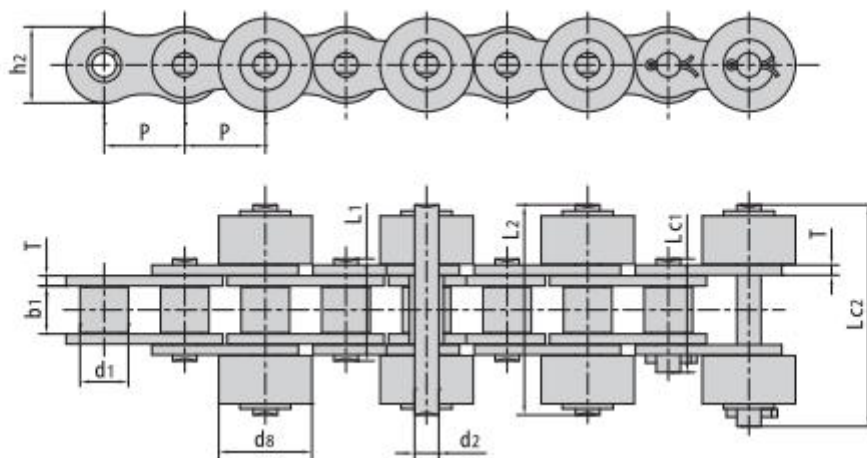


链号	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length				链板尺寸 Plate dimension		极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d1 max	d8 max	b1 min	d2 max	L1 max	L2 max	Lc1 max	Lc2 max	h2 max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
40S2-SR	12.700	7.95	15.88	7.85	3.96	16.6	35.3	18.8	37.2	12.00	1.50	14.1/3169	1.64
50SF1-C	15.875	10.16	19.05	9.40	5.08	20.7	42.8	23.3	45.0	15.09	2.03	21.8/4900	2.41
60S2-C	19.050	11.91	22.23	12.57	5.94	25.9	54.0	28.3	56.6	18.00	2.42	31.8/7149	3.62
100S2	31.750	9.53	36.70	18.90	9.53	40.4	83.0	44.7	87.0	30.00	4.00	86.7/49490	9.09

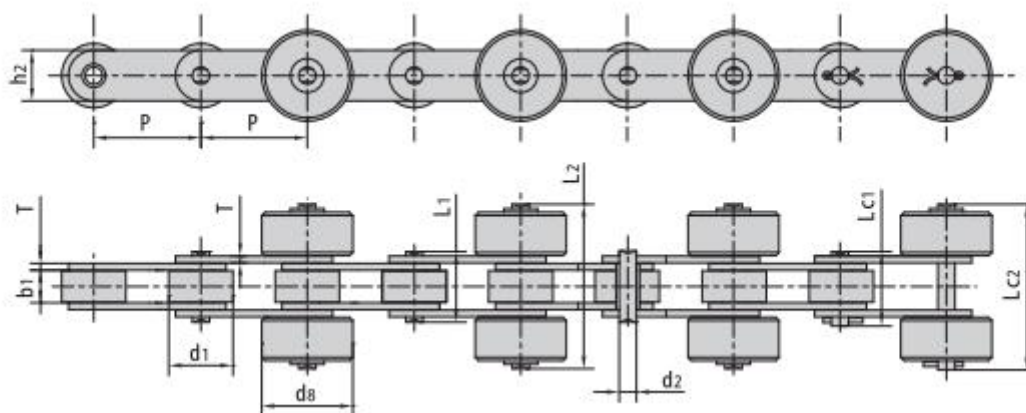

链号	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length				链板尺寸 Plate dimension		极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d1 max	d8 max	b1 min	d2 max	L1 max	L2 max	Lc1 max	Lc2 max	h2 max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
C2050S2	31.75	10.16	19.05	9.40	5.08	/	42.8	/	45.0	15.0	2.03	21.8/4899	2.20
*C2052SF2-P25.4	31.75	19.05	25.40	9.40	5.08	20.7	49.2	23.3	51.1	15.0	2.03	21.8/4900	1.23
C2060HS-C	38.10	11.91	30.00	12.57	5.94	29.2	57.6	31.6	59.2	18.0	3.25	31.8/7149	3.42
C2062HS-C	38.10	22.23	30.00	12.57	5.94	/	57.6	/	59.2	18.0	3.25	31.8/7149	5.97

带大滚轮输送链

Conveyor chains with large roller

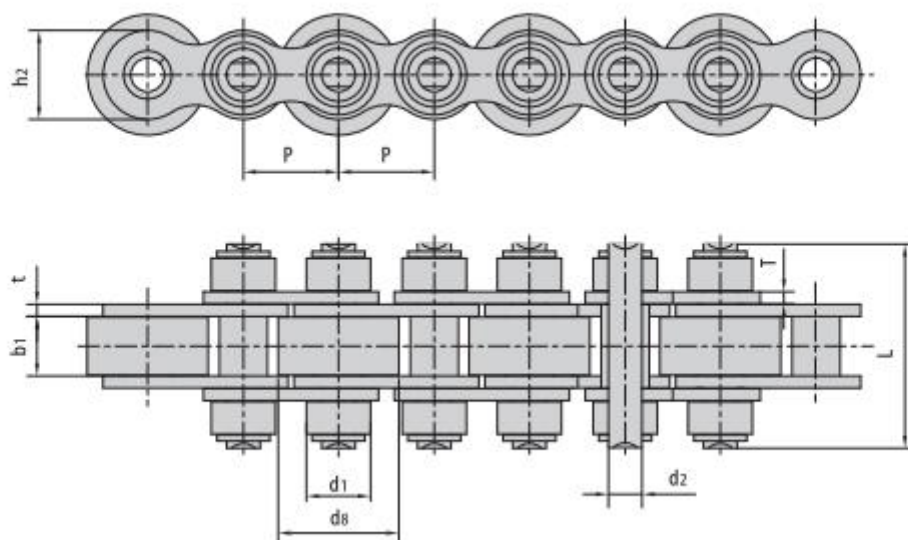


链号	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength
	P	d1 max	d8 max	b1 min	d2 max	L max	h2 max	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	kN/ bf	kN
08BS-27-P16/C16	12.70	8.51	16.0	7.75	4.45	27.0	11.8	1.60/1.50	18.0/4091	19.8
12BS	19.05	12.07	28.0	11.68	5.72	45.0	16.0	1.85	28.9/6568	31.7
12BS-40-P28/C28	19.05	12.07	28.0	11.68	5.72	40.0	16.0	1.85	29.0/6591	31.7
12BS-43-P26/C26	19.05	12.07	26.0	11.68	5.72	43.0	16.0	1.85	29.0/6591	31.7
12BS-43-P28/C28	19.05	12.07	28.0	11.68	5.72	43.0	16.0	1.85	29.0/6591	31.7
12BS-48-P24/C24	19.05	12.07	24.0	11.68	5.72	48.0	16.0	1.85	29.0/6591	31.7
12BS-48-P26/C26	19.05	12.07	26.0	11.68	5.72	48.0	16.0	1.85	29.0/6591	31.7
12BS-48-P28/C28	19.05	12.07	28.0	11.68	5.72	48.0	16.0	1.85	29.0/6591	31.7
12BS-58-P28/C28	19.05	12.70	28.0	11.68	5.72	58.0	16.0	1.85	29.0/6591	31.7
16BS-65-P38/C38	25.40	15.88	38.0	17.02	8.28	65.0	21.0	4.15/3.10	60.0/13636	72.8
100SF1-85-C45	31.75	19.05	45.0	25.50	9.53	85.0	30.0	4.00	86.7/19490	104.0
212BS-43-P48	38.10	12.07	48.0	11.68	5.72	43.0	16.0	1.85	28.9/6568	31.7

注： P 表示滚子材料为塑料，C 表示滚子材料为钢。

Note: P means roller made in plastic, C means roller made in steel.

带大滚轮输送链

Conveyor chains with large rollers

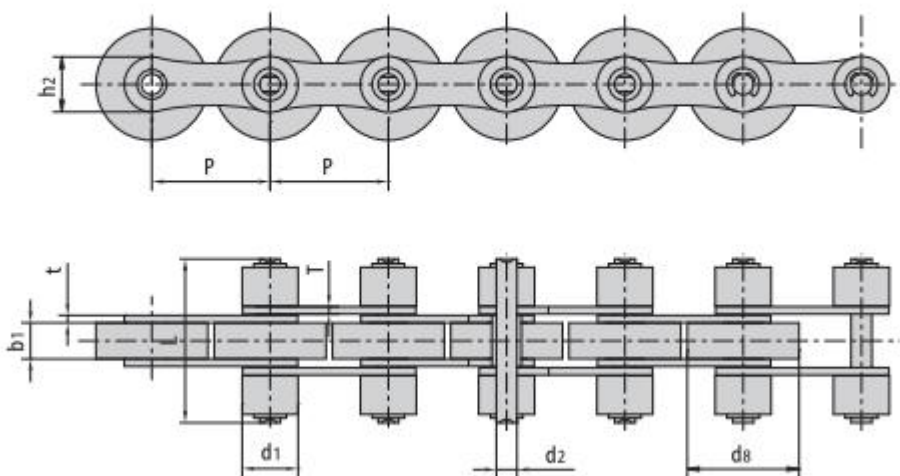


链号	节距 Pitch	滚子直径 Roller diameter		内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板尺寸 Plate dimension		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength
	P	d1 max	d8 max	b1 min	d2 max	L max	h2 max	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN
16BS-65-C24	25.4	15.88	24.0	17.02	8.28	65.0	21.0	4.15/3.10	60.0/13636	72.8
208BS-35-C24	25.4	12.00	24.0	7.75	4.45	35.0	11.8	1.60	18.0/4091	19.8
*208BSF1-35-P24	25.4	12.00	24.0	7.75	4.45	35.0	11.8	1.60	18.0/4091	19.8
212BS-48-C28	38.1	12.07	28.0	11.68	5.72	48.0	16.0	1.85	28.9/6568	31.7
212BSF2	38.1	12.07	28.0	11.68	5.72	43.0	16.0	1.85	28.9/6568	31.7
212BSF3	38.1	12.07	28.0	11.68	5.72	48.0	16.0	1.85	28.9/6568	31.7
*212BSF4	38.1	12.07	24.0	11.68	5.72	48.0	16.0	1.85	28.9/6568	31.7
212BSF5-43-C28	38.1	12.07	28.0	11.68	5.72	43.0	16.0	1.85	28.9/6568	31.7
*216BS-65-P50	50.8	15.88	50.0	17.02	8.28	65.0	21.0	4.15/3.10	60.0/13636	72.8
216BS-65-C38.5	50.8	15.88	38.5	17.02	8.28	65.0	21.0	4.15/3.10	60.0/13636	72.8
216BS-65-C40	50.8	15.88	40.0	17.02	8.28	65.0	21.0	4.15/3.10	60.0/13636	72.8
63PS	63.0	40.00	50.0	24.50	14.00	91.5	35.0	5.10	90.0/20232	135.0
63PSF1	63.0	38.00	46.0	21.60	12.00	84.0	30.0	4.00	66.68/15000	85.0

注： *表示滚子材料为塑料。

Note: * means roller made in plastic.

带特殊滚轮输送链

Conveyor chains with special rollers

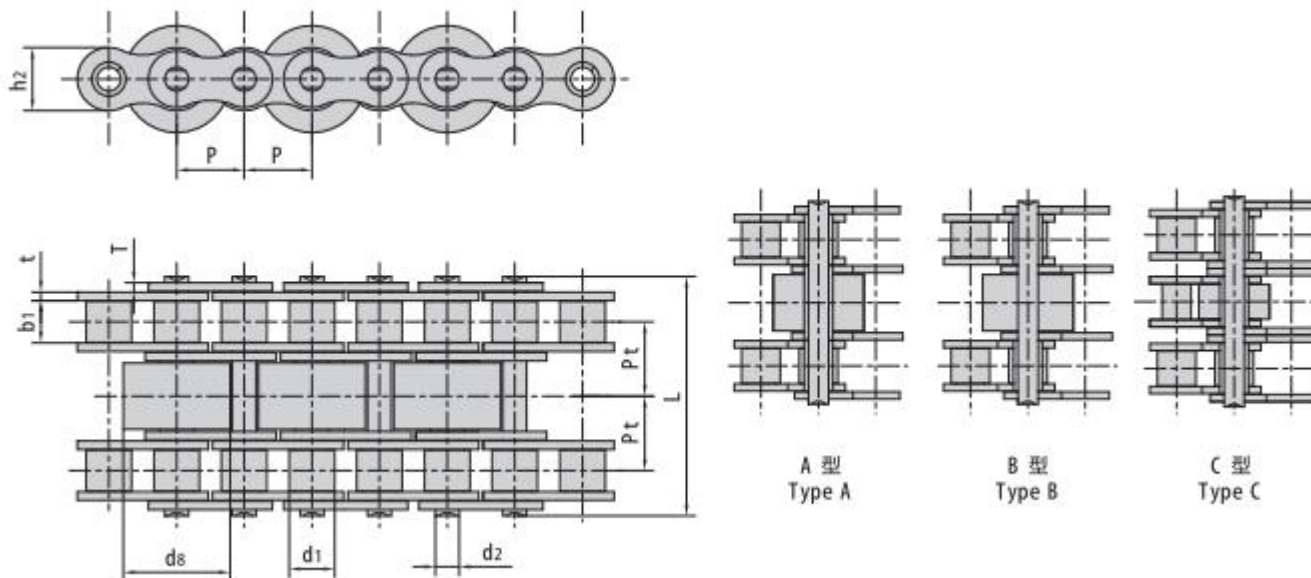


链号	Pitch	Roller diameter		Width between inner plates	Pin diameter	Pin length	Plate dimension		Transverse pitch	Ultimate tensile strength	Average tensile strength	Type
	P	d1 max	d8 max	b1 min	d2 max	L max	h2 max	t/T max	Pt	Q min	Q0	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	
06BS-3-C15/P15	9.525	6.35	15.0	5.72	3.28	33.5	8.2	1.30	10.24	16.9/3841	18.7	B
A06BF3S-3-C15/P15	9.525	6.35	15.0	5.72	3.28	33.5	8.4	1.30	10.24	16.9/3841	18.7	B
08BS-3-45-C16	12.700	8.51	16.0	7.75	4.45	45.1	11.8	1.60	13.92	32.0/7273	38.7	A
08BS-3-45-C17	12.700	8.51	17.0	7.75	4.45	45.1	11.8	1.60	13.92	32.0/7273	38.7	A
08BS-3-45-C20	12.700	8.51	20.0	7.75	4.45	45.1	11.8	1.60	13.92	32.0/7273	38.7	A
08BSF6-3-45-C20	12.700	8.51	20.0	7.75	4.45	45.1	11.8	1.60	13.92	32.0/7273	38.7	B
12AF90-3-71-C28	19.050	11.91	28.0	12.57	5.94	71.5	18.0	2.42	22.78	62.6/14073	82.0	B
12BS-3-62-C28/P28	19.050	12.07	28.0	11.68	5.72	61.5	16.0	1.85	19.46	57.8/13136	66.1	A
12BS-3-62-C31	19.050	12.07	31.0	11.68	5.72	61.5	16.0	1.85	19.46	57.8/13136	66.1	B
12BSF10-3-62-C26	19.050	12.07	26.0	11.68	5.72	61.5	16.0	1.85	19.46	86.7/19705	101.8	C
12BSF10-3-62-C28	19.050	12.07	28.0	11.68	5.72	61.5	16.0	1.85	19.46	86.7/19706	101.8	C
12BF45-3-C28/P28	19.050	12.07	28.0	11.68	5.72	61.5	16.0	1.85	19.46	57.8/13136	66.1	B

注: P 表示滚子材料为塑料, C 表示滚子材料为钢。

Note: P means roller made in plastic, C means roller made in steel.

带附板输送链


Conveyor chains with attachments

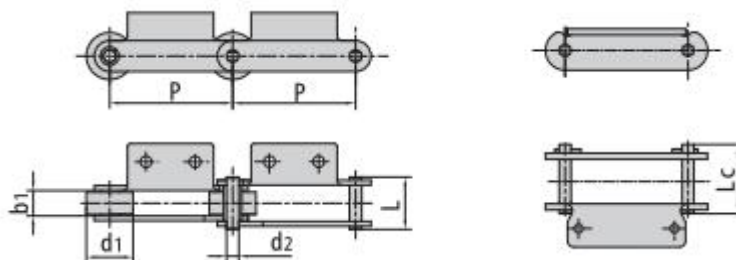

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	kN/ bf	kN	kg/m
*P28	28.575	11.68	16.00	7.870	—	32.4	50.0/11240	55.0	2.66
*P28F1	28.575	11.68	16.13	7.870	—	32.4	50.0/11240	55.0	2.60
P38F10K1	38.000	15.88	13.00	8.280	32.5	35.5	55.0/12364	60.5	2.60
P38F11K1	38.000	15.88	13.00	8.280	30.5	33.5	45.0/10116	49.5	2.30
P38.1F2	38.100	22.50	13.00	8.000	29.5	33.3	40.0/8992	44.0	2.42
P38.1F25A1	38.100	18.00	15.00	8.280	36.1	39.1	68.0/15287	75.0	3.00
P39.75A1	39.750	17.25	22.00	7.800	40.5	44.3	47.0/10566	51.7	3.10
P41.3F9A2	41.300	22.00	11.00	9.000	28.6	31.6	40.0/8992	44.0	2.30
P41.3F14A2	41.275	22.22	12.70	5.940	29.2	31.6	30.0/6744	33.0	2.22
P42F2	42.000	11.00	13.00	6.000	30.0	32.5	50.0/11240	55.0	1.85
P42.5	42.500	15.88	15.75	7.920	32.7	36.5	56.7/12746	62.0	3.40
P44F3A2	44.000	15.88	17.02	8.280	36.1	39.1	60.0/13488	66.0	2.32
P44.45F5	44.450	25.40	16.51	7.920	36.2	38.9	35.0/7874	38.5	3.85
P44.45F7A1	44.450	28.58	15.00	9.530	34.5	38.7	45.0/10116	49.5	3.80
P46	46.000	16.00	16.00	8.000	36.0	39.0	55.0/12364	60.5	3.23
P49F2A1	49.000	31.00	23.00	9.800	36.6	42.0	40.0/8992	44.0	5.51
P50F16	50.000	24.90	10.70	7.800	26.6	28.8	33.0/7418	36.3	2.22
P50F27A1	50.000	31.00	15.00	9.800	36.6	42.0	40.0/8992	44.0	5.30
P50.8F22A1-F	50.800	32.00	15.00	11.700	39.0	43.0	50.0/11240	55.0	6.13
P50.8F35A1	50.800	25.00	12.57	5.940	25.9	29.0	31.8/7150	35.0	2.20
P75F6	75.000	16.00	16.00	8.000	—	41.0	32.0/7200	35.2	2.44
P75F8A2	75.000	31.80	16.00	8.000	—	41.0	32.0/7200	35.2	3.52
P75F8A2-F	75.000	30.00	16.00	8.000	—	41.0	32.0/7200	35.2	3.80
P75F20A1	75.000	40.00	22.00	12.000	47.0	52.0	90.0/20232	99.0	6.81
P75F23	75.000	28.00	24.40	11.100	—	61.5	140.0/31473	154.0	4.49
P75F27A2	75.000	45.00	22.00	11.000	—	51.4	62.3/14005	68.0	7.43
*P76F1K1	76.000	32.00	35.00	16.000	—	77.0	240.0/53954	265.0	12.10
P76.2F1	76.200	31.75	15.00	14.200	—	44.2	60.0/13488	66.0	4.45
P76.2F41K1	76.200	38.10	25.40	11.100	—	57.5	80.0/17984	88.0	7.40
P76.2F42K1	76.200	38.10	25.40	11.100	—	60.7	120.0/26977	132.0	7.94
P78.11F8	78.110	31.80	37.10	15.000	—	83.5	100.0/22480	110.0	12.05
P80F4	80.00	30.00	15.00	13.900	42.5	46.5	86.0/19333	95.0	3.97
P80F4-P	80.00	45.00	15.00	13.900	42.5	46.5	86.0/19333	94.6	5.67
P85A2F1	85.00	44.45	16.00	10.000	—	56.6	90.0/20232	100.0	6.80

带附板输送链

Conveyor chains with attachments

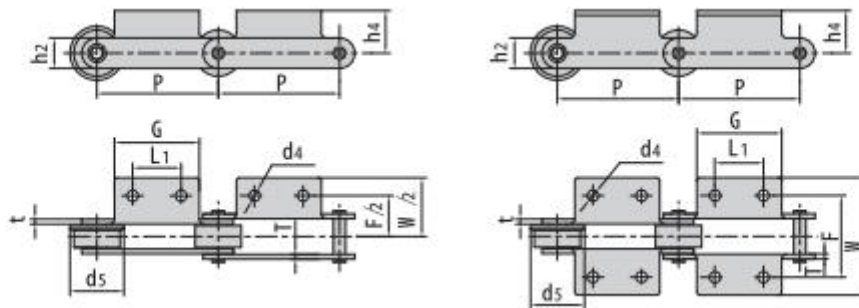


链号	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
*P28	28.575	28.58	51.00	46.74	61.20	13.70	22.23	8.75	3.10	—
*P28F1	28.575	28.58	50.80	46.80	61.86	12.70	22.23	9.02	3.10	—
P38F10K1	38.000	△	30.00	49.00	79.00	16.50	21.00	8.40	3.5	—
P38F11F1	38.000	△	30.00	47.00	77.00	16.50	21.00	8.40	3.00	—
P38.1F2	38.100	△	28.00	56.00	76.00	17.20	19.00	9.00	3.00	—
P38.1F25A1	38.100	△	28.00	51.00	71.00	15.00	21.00	8.40	4.00	—
P39.75A1	39.750	△	61.00	62.10	94.10	16.50	21.25	11×8	3.50	—
P41.3F9A2	41.300	12.00	24.00	36.20	48.20	17.00	21.00	5.50	3.00	—
P41.3F14A2	41.275	14.30	28.60	42.90	61.20	14.70	17.50	5.20	3.25	—
P42F2	42.000	△	35.00	40.00	76.00	12.80	17.00	6.00	3.00	—
P42.5	42.500	19.00	38.00	53.50	70.00	19.50	22.00	7.00	3.25	—
P44F3A2	44.000	26.00	44.00	50.80	68.00	19.10	21.00	6.60	4.15/3.1	—
P44.45F5	44.450	△	34.93	57.16	74.46	19.05	19.05	8.00	3.80	—
P44.45F7A1	44.450	△	22.00	66.00	84.80	12.80	25.60	7.00	3.00	—
P46	46.000	△	38.00	54.00	82.80	18.00	22.00	6.00	4.00	—
P49F2A1	49.000	△	45.00	62.00	86.00	35.00	25.00	10.00	4.00	—
P50F16	50.000	△	41.30	45.00	61.40	36.00	20.00	6.50	3.00	—
P50F27A1	50.000	△	45.00	62.00	86.00	35.00	25.00	10.00	4.00	—
P50.8F22A1-F	50.800	△	45.00	75.00	110.40	20.00	26.40	9.00	4.50	40.00
P50.8F35A1	50.800	△	48.00	46.00	68.00	26.00	18.00	8.00	2.50	—
P75F6	75.000	30.00	55.00	60.00	92.00	20.00	22.00	10.00	3.00	—
P75F8A2	75.000	30.00	55.00	60.00	92.00	20.00	22.00	10.00	3.20	—
P75F8A2-F	75.000	30.00	55.00	60.00	92.00	20.00	22.00	10.00	3.20	38.00
P75F20A1	75.000	△	55.00	64.00	92.00	25.00	32.00	M8	4.50	50.00
P75F23	75.000	40.00	60.00	88.00	118.00	37.00	30.00	9.00	6.00	—
P75F27A2	75.000	35.00	60.00	70.00	110.90	22.00	32.00	10.00	4.5/4.0	—
*P76F1K1	76.000	△	50.00	109.20	149.20	35.00	50.00	11.00	6.00	—
P76.2F1	76.200	31.00	58.00	75.40	107.00	21.25	29.00	10.50	4.50	—
P76.2F41K1	76.200	△	51.00	75.00	100.00	39.55	30.20	8.60	4.80	—
P76.2F42K1	76.200	△	50.80	74.60	101.60	20.60	28.60	8.70	4.80/6.4	—
P78.11F8	78.110	30.00	65.00	120.00	150.00	35.00	38.10	12.00	7.90	—
P80F4	80.000	40.00	70.20	57.40	87.40	22.95	27.10	8.50	5.60/4.15	—
P80F4-P	80.000	40.00	70.20	57.40	87.40	22.95	27.10	8.50	5.60/4.15	—
P85A2F1	85.000	30.00	50.40	95.00	125.00	22.50	35.00	9.00	4.80	—

△附板带一个孔

△Attachments with 1 hole

带附板输送链


Conveyor chains with attachments

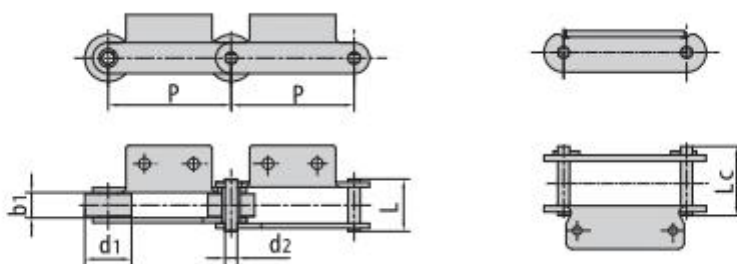

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	kN/ bf	kN	kg/m
P90F5A2	90.00	31.80	16.10	8.00	—	41.0	32.0/7193	35.0	2.86
P95F1A2	95.00	30.00	23.00	10.00	45.5	49.5	60.0/13488	66.0	3.79
P100A2F1	100.00	50.00	29.90	14.00	—	61.0	150.0/33721	165.0	9.20
P100F1	100.00	42.00	23.00	9.53	52.0	54.3	86.7/19704	95.0	6.06
P100F2	100.00	36.00	18.00	9.53	47.0	49.3	86.7/19704	95.0	4.60
P100F3	100.00	29.00	30.00	14.50	—	71.0	95.0/21356	105.0	9.46
P101.6F9	101.60	31.75	15.00	14.20	—	44.2	66.7/15159	73.0	8.40
P117	117.00	35.00	50.00	17.00	—	102.0	150.0/33721	166.5	13.40
P120	120.00	50.00	28.00	12.00	54.0	58.0	160.0/35993	176.0	8.14
P125F2	125.00	32.00	18.50	8.00	39.0	—	50.0/11240	55.0	2.66
P125F28A2	125.00	32.00	18.50	8.00	—	40.0	50.0/11240	55.0	3.13
P130K2F2	130.00	80.00	40.00	24.00	77.6	88.3	200.0/44992	218.0	13.90
P150F2	150.00	40.00	27.00	11.10	57.0	61.0	124.6/28318	137.0	5.40
P150F4	150.00	50.00	37.00	16.00	77.5	82.5	170.0/38243	187.0	10.90
P150F6	150.00	50.00	30.00	12.00	49.5	—	86.7/19704	95.0	7.27
P150F11A2	150.00	46.70	21.50	15.00	46.6	51.5	130.0/29245	142.0	7.13
P150F13A2	150.00	47.60	21.50	15.00	50.6	55.5	130.0/29245	142.0	8.52
P150F18	150.00	50.00	37.00	16.00	77.5	82.5	170.0/38243	187.0	14.49
P152F1	152.40	40.10	37.50	19.10	97.5	—	328.7/74704	378.0	15.88
P152F4	152.40	50.80	30.60	14.27	62.8	67.5	88.0/20000	100.0	9.24
P152F11	152.40	38.00	53.50	14.70	112.4	—	130.0/29245	142.0	12.60
P153F3K2	153.60	35.00	54.10	17.50	—	106.0	200.0/44961	220.0	14.02
*P160F1	160.00	36.00	55.00	20.00	108.00	—	50.0/11364	55.0	14.50
P160F3	160.00	48.00	25.00	14.85	62.50	—	120.0/26977	132.0	7.10
P160F5	160.00	60.00	33.00	14.27	64.00	72.0	150.0/34091	165.0	8.00
P160F8	160.00	40.00	20.00	11.00	50.00	—	55.0/12500	61.0	4.58
P185	185.00	50.80	30.60	14.27	62.80	67.5	70.0/15909	77.0	8.42
P200F6	200.00	50.00	37.00	16.00	77.50	82.5	170.0/38243	188.7	9.69
P200F7	200.00	40.00	27.00	11.10	57.00	61.0	124.6/28030	137.0	9.78
P200F8	200.00	65.00	37.00	16.00	86.50	—	170.0/38243	188.7	15.23
P203.2F10	203.20	88.90	45.97	25.40	—	116.3	488.0/109706	536.0	37.00
P250F1	250.00	50.00	30.00	14.00	—	81.3	170.0/38243	188.70	8.40
P300	300.00	50.00	30.00	14.30	—	67.0	135.0/30348	148.50	5.73
P315	315.00	180.0	90.00	42.00	182.6	—	100.0/22727	110.0	—

带附板输送链

Conveyor chains with attachments

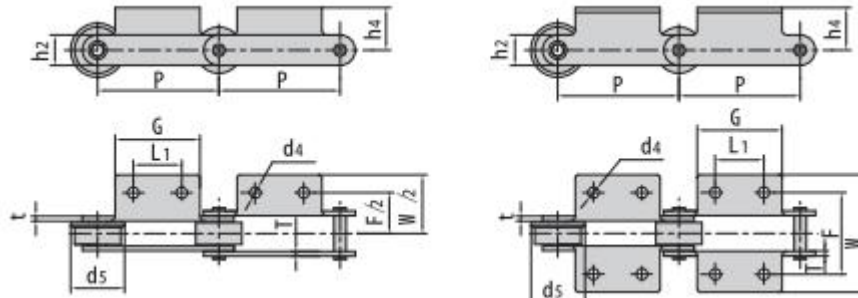


链号	P	L1	G	F	W	h4	h2	d4	t/T	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P90F5A2	90.00	40.00	65.00	60.00	92.00	20.00	22.00	10.00	3.20	42.00
P95F1A2	95.00	40.00	65.00	66.40	96.40	22.50	25.00	8.50	4.00	40.00
P100A2F1	100.00	40.00	65.00	98.00	128.00	35.00	40.00	10.00	4.00	65.00
P100F1	100.00	78.00	96.00	73.00	103.00	17.50	32.00	7.00	5.00	—
P100F2	100.00	40.00	70.00	68.00	98.00	17.50	32.00	9.00	5.00	—
P100F3	100.00	40.00	70.00	100.00	128.00	28.00	38.10	12.00	6.00	—
P101.6F9	101.60	31.00	65.00	75.40	107.00	21.25	29.00	10.50	4.50	—
P117	117.00	90.00	160.00	136.00	176.00	35.00	40.00	14.00	8.00	—
P120	120.00	50.00	75.00	82.00	119.60	20.00	40.00	7.00	5.00	59.00
P125F2	125.00	46.00	76.00	64.00	90.00	14.00	22.00	10.00	3.00	42.00
P125F28A2	125.00	46.00	76.00	64.00	90.00	45.00	22.00	8.00	3.00	42.00
P130K2F2	130.00	55.00	95.00	102.00	144.00	47.50	60.00	11.00	6.00	—
P150F2	150.00	60.00	85.00	92.00	117.30	22.50	32.00	10.00	6.00	—
P150F4	150.00	60.00	85.00	120.00	150.00	33.00	43.00	14.00	8.00	—
P150F6	150.00	50.00	75.00	86.60	126.60	17.50	35.00	9×26	4.00	59.00
P150F11A2	150.00	36.00	60.00	163.50	189.60	40.15	39.70	10.60	5.00	—
P150F13A2	150.00	36.00	60.00	164.00	193.50	52.00	40.00	11.00	6.00	—
P150F18	150.00	60.00	85.00	120.00	150.00	33.00	43.00	M10	8.00	—
P152F1	152.40	60.00	100.00	130.00	202.00	45.00	50.00	15.00	9.00	—
P152F4	152.40	60.00	100.00	110.00	140.00	32.00	38.00	15.00	6.00	65.00
P152F11	152.40	44.60	74.80	133.70	168.00	24.00	39.00	10.80	9.60/11.40	—
P153F3K2	153.60	44.50	204.80	136.60	168.60	38.10	44.50	12.70	8.00	—
*P160F1	160.00	60.00	110.00	130.00	173.00	40.00	50.00	14.00	9.00	—
P160F3	160.00	49.00	70.00	83.00	117.00	32.50	35.00	8.5	6.00	—
P160F5	160.00	35.00	70.00	110.00	166.00	38.70	40.00	14.0	5.60	—
P160F8	160.00	80.50	133.00	56.00	100.00	16.00	32.00	8.33x13.30	4.50	—
P185	185.00	60.00	120.00	110.00	140.00	32.00	38.00	15.0	6.00	65.00
P200F6	200.00	81.50	120.00	120.00	150.00	33.00	43.00	14.0	8.00	—
P200F7	200.00	81.50	120.00	92.00	122.00	22.00	32.00	10.0	6.00	—
P200F8	200.00	80.00	120.00	200.00	238.00	38.00	43.00	15.0	8.00	80.00
P203.2F6	203.20	114.30	152.40	131.83	192.00	54.10	69.80	17.5	12.70	—
P250F1	250.00	60.0	93.00	108.00	143.60	30.00	38.00	10.00	8.00	—
P300	300.00	60.0	94.00	100.0	129.00	39.00	38.10	12.00	6.00	—
P315	315.00	150.0	250.0	180.0	215.00	120.0	120.0	21.00	12.00	—

△附板带一个孔

△Attachments with 1 hole


木材输送链及附件

Lumber conveyor chains & attachments

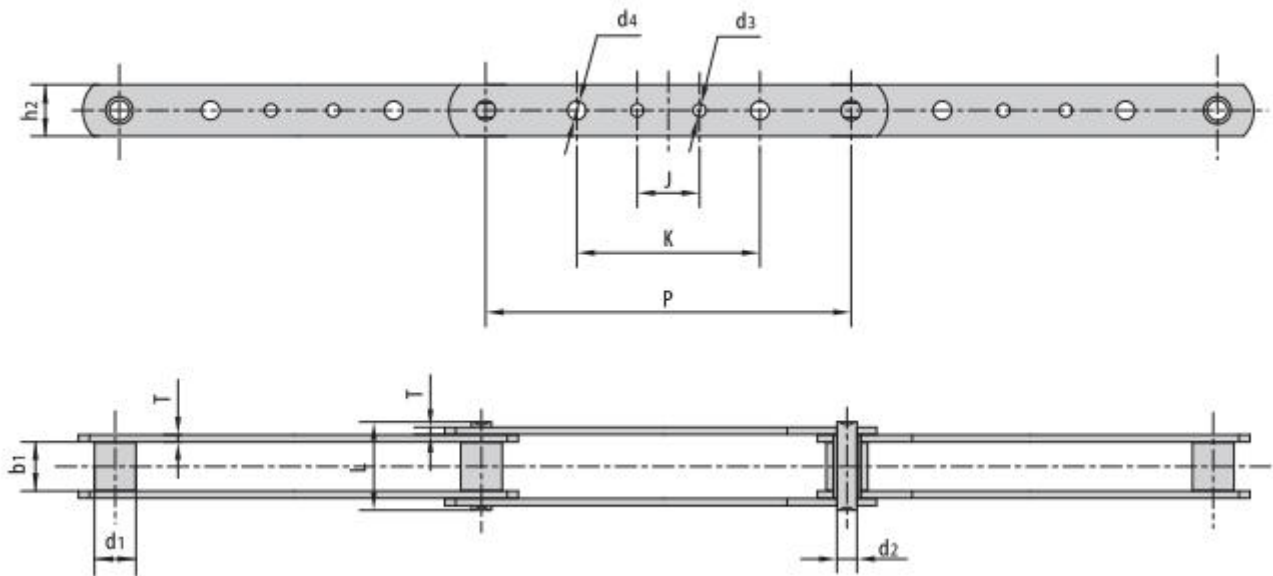

链号 Pitch	节距	滚子直径	内节内宽	销轴尺寸		链板尺寸					链板厚度	极限拉伸载荷	平均拉伸载荷	每米长重
	P	d1	b1	d2	L	h2	d3	d4	J	K	T	Q	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/ b f	kN	kg/m
3939-B4	203.2	23.0	27.0	11.1	49.0	28.58	7.2	7.2	38.1	101.6	4.0	115.58/26268	136.5	2.45
3939-B21	203.2	23.0	27.0	11.1	49.0	28.58	7.2	-	38.1	-	4.0	115.58/26268	136.5	2.45
3939-B23	203.2	23.0	27.0	11.1	49.0	28.58	-	10.3	-	92.1	4.0	115.58/26268	136.5	2.45
3939-B24	203.2	23.0	27.0	11.1	49.0	28.58	-	7.2	-	101.6	4.0	115.58/26268	136.5	2.48
3939-B40	203.2	23.0	27.0	11.1	49.0	28.58	-	10.3	-	101.6	4.0	115.58/26268	136.5	2.45
3939-B43	203.2	23.0	27.0	11.1	49.0	28.58	7.2	10.3	38.1	92.1	4.0	115.58/26268	136.5	2.42
3939-B44	203.2	23.0	27.0	11.1	49.0	28.58	7.2	10.3	38.1	101.6	4.0	115.58/26268	136.5	2.45
3939H-B4	203.2	23.0	27.0	11.1	58.0	28.60	-	7.2	38.0	102.0	6.4	150.00/34082	172.5	3.51

烟草输送链
Tobacco conveyor chains


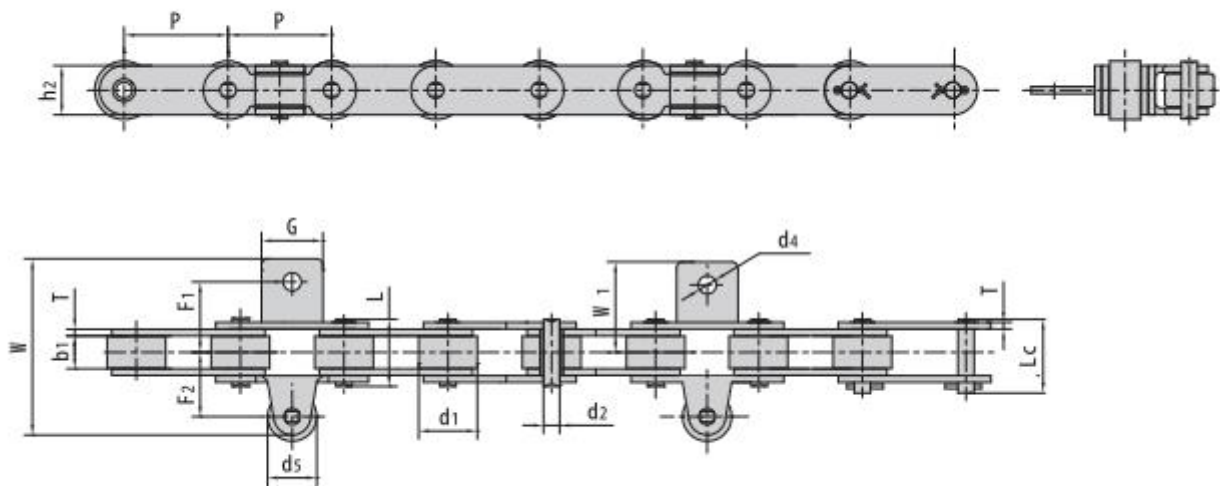


链号	G	F1	F2	W1	W	d4	d5
	mm	mm	mm	mm	mm	mm	mm
C2082F35	30.0	33.0	32.0	45.7	86.7	8.8	24.0
C2082HF70	30.0	34.0	32.0	44.0	85.0	8.6	24.0

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板高度 Plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1	d2 max	L max	Lc max	h2 max	T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/ bf	kN	kg/m
C2082F35	50.8	28.58	15.75	7.92	32.7	36.5	24.0	3.25	55.6/12500	60.0	3.37
C2082HF70	50.8	28.58	15.75	7.92	36.2	38.9	24.0	4.00	55.6/12500	60.0	3.31

纸卷用输送链


Conveyor chains for paper mill

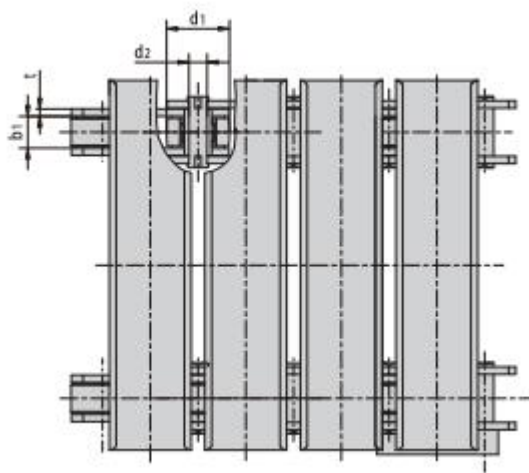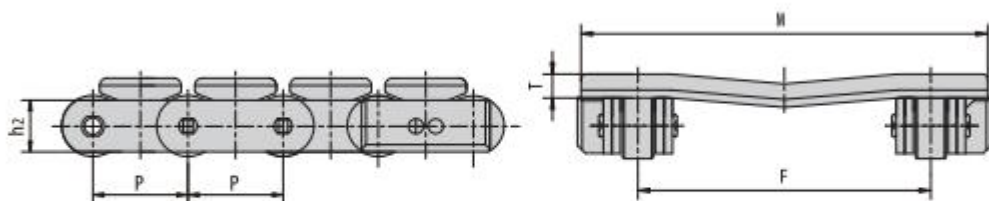

链号	节距 Pitch	内节内宽 Width between inner plates	销轴直径 Pin diameter	滚子直径 Roller diameter	链板高度 Plate depth	链板厚度 Plate thickness	附板尺寸 Attachment dimension			极限拉伸载荷 Ultimate tensile strength
	P	b ₁ min	d ₂ max	d ₁ max	h ₂ max	t max	F	T	M	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf
P63. 5F4	63. 5	21. 5	14. 0	42. 0	38. 0	5. 0	178. 0	8. 0	250. 0	120. 0/26994
P63. 5F6	63. 5	28. 0	12. 0	42. 0	35. 0	5. 0	183. 0	8. 0	250. 0	100. 0/22495
P63. 5F8	63. 5	28. 0	12. 0	42. 0	35. 0	5. 0	183. 0	8. 0	250. 0	120. 0/26994

棕油链


Palm oil chains

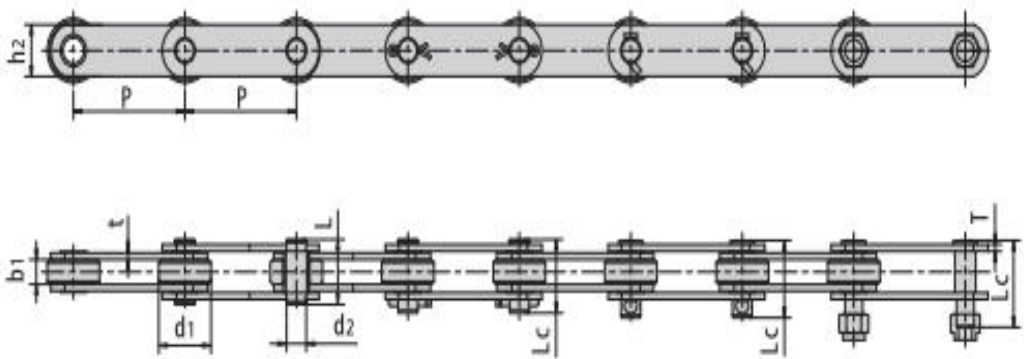

链号	Pitch	Roller diameter	Width between inner plates	Plate depth	Pin diameter	Pin length		Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	h2 max	d2 max	L max	Lc max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P101.6F5	101.6	47.6	19.0	38.1	19.00	45.2	62.6	5.0	97.8/22000	107.58	6.75
P101.6F6	101.6	47.6	19.1	38.1	19.05	51.2	88.9	5.1	97.8/22000	107.58	7.20
P152.4F4	152.4	66.7	25.4	50.0	26.90	58.5	80.3	5.0	89/20000	97.90	5.66
P152.4F6	152.4	66.7	25.4	50.8	27.00	67.5	88.5	8.0	163.3/36000	179.60	12.83
P152.4F7	152.4	66.7	25.4	50.8	27.00	69.5	111.5	9.0/8.0	200/45000	220.00	13.54
P152.4F9	152.4	88.9	38.1	61.0	31.80	—	98.5	10.0	266.72/60000	293.00	26.60

曳引用钢制焊接弯板链

Welded steel type cranked link drag chains

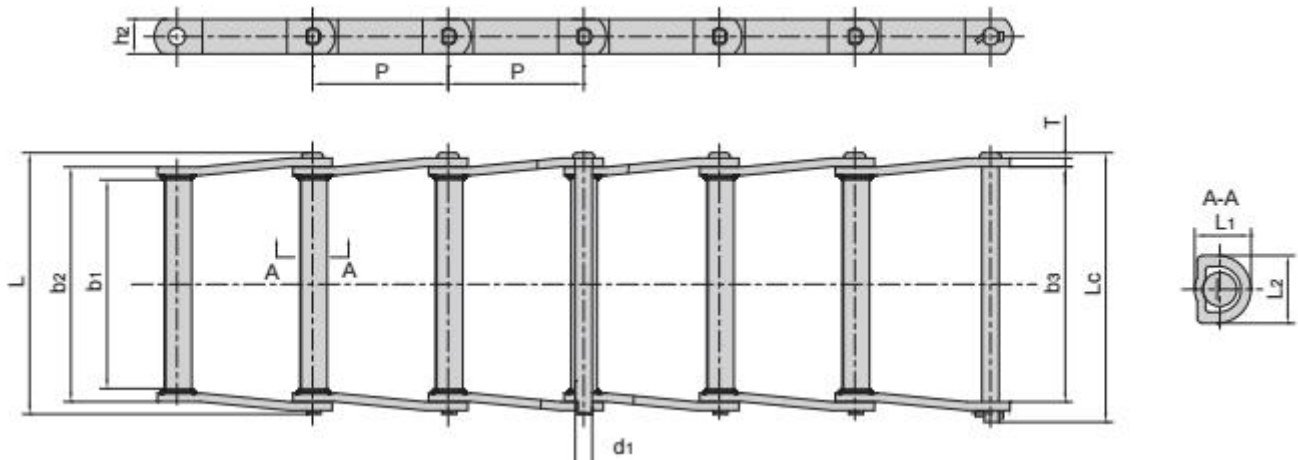


ISO 链号 ISO Chain No.	节距 Pitch	套筒 A-A 截面长度 Bush A-A section length	套筒 A-A 截面高度 Bush A-A section height	链节窄端内宽 Width between narrow linkend	销轴直径 Pin diameter end	链节窄端外宽 Width over narrow linkend	链板宽端内宽 Width between broad linkend	链板高度 Plate depth
	P	L1	L2	b1 min	d1 max	b2 max	b3 min	h2 max
	mm	mm	mm	mm	mm	mm	mm	mm
WD102	127.0	31.7	39.1	162.0	19.13	197.1	197.6	38.12
WD104	152.4	31.7	39.1	104.6	19.13	136.9	137.4	38.12
WD110	152.4	31.7	39.1	228.6	19.13	263.9	264.4	38.12
WD112	203.2	31.7	39.1	228.6	19.13	263.9	264.4	38.12
WD113	152.4	33.2	39.1	228.6	22.30	270.2	270.7	38.12
WD116	203.2	36.6	45.2	330.2	19.13	359.1	359.6	45.21
WD118	203.2	44.5	51.8	336.5	22.30	378.2	378.7	51.80
WD122	203.2	44.5	51.8	222.2	22.30	260.6	261.1	51.80
WD480	203.2	44.5	51.8	282.4	22.30	324.1	324.6	51.80


ISO 链号 ISO Chain No.	销轴长度 Pin length		链板厚度 Plate thickness	极限抗拉强度 Ultimate tensile strength	
	L max	Lc max	T	Q min	Q min
	mm	mm	mm	kN/lbf 销轴热处理 Only pin hardened	kN/lbf 全部热处理 All parts hardened
WD102	255.6	245.4	9.7	170/38217.0	245/55078.20
WD104	188.0	181.4	9.7	170/38217.0	245/55078.20
WD110	315.0	308.6	9.7	170/38217.0	245/55078.20
WD112	315.0	308.6	9.7	170/38217.0	245/55078.20
WD113	330.2	322.3	12.7	213/47884.3	253/56876.68
WD116	410.4	405.9	9.7	245/55078.2	262/58899.90
WD118	440.0	431.1	12.7	311/69915.6	351/78907.96
WD122	324.2	314.5	12.7	311/69915.6	351/78907.96
WD480	387.6	378.0	12.7	311/69915.6	351/78907.96

A 型 CA 型钢制农机链

A type CA type steel agricultural chains

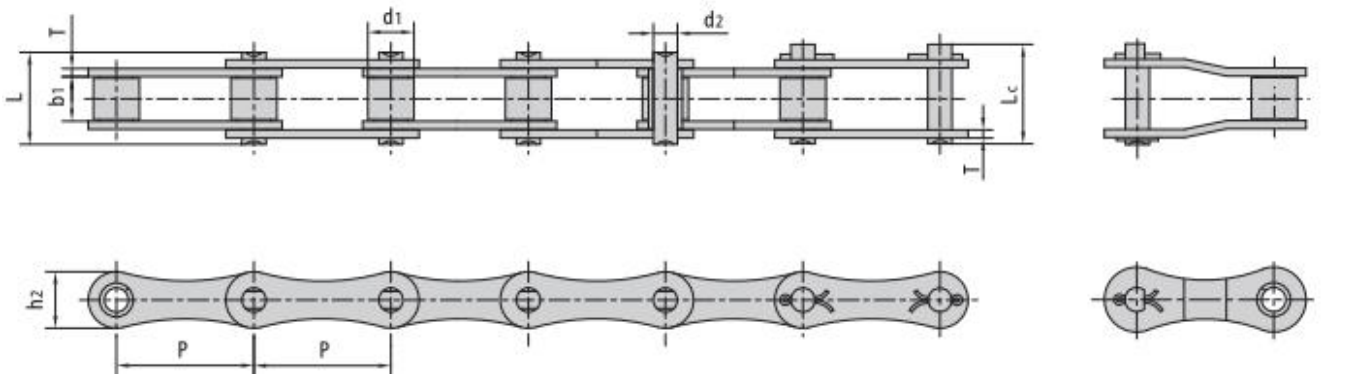


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
A550	41.40	16.87	19.81	7.19	35.0	38.0	19.3	2.80	39.10/8886	51.2	1.79
A555	41.40	16.87	12.70	7.19	29.1	32.0	19.3	3.10	39.10/8886	56.0	1.60
A557	41.40	17.78	20.24	8.00	37.4	40.6	23.1	3.10	55.61/12639	74.3	2.45
A620	42.01	17.91	24.51	7.19	41.8	45.2	20.2	3.25	39.10/8886	55.1	2.18

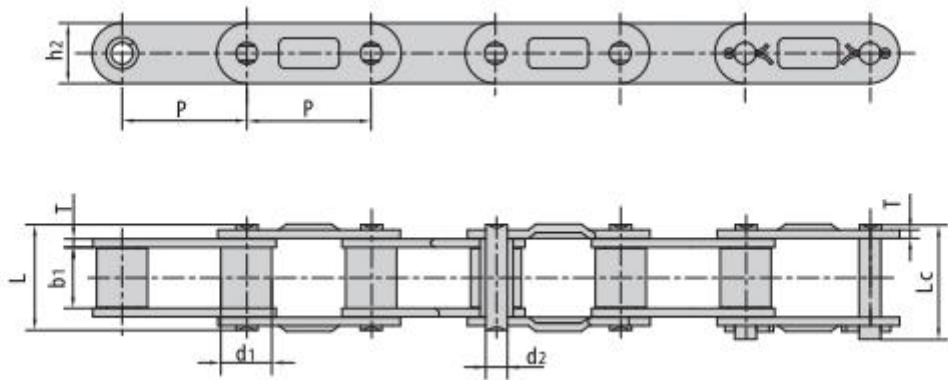


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
P30	30.00	15.88	19.05	8.28	36.1	39.4	20.5	3.00	50.00/11247	55.0	2.51
CA550D	41.40	16.87	19.81	7.19	35.0	38.0	19.3	2.80	39.10/8886	51.2	1.94
CA555D	41.40	16.87	12.70	7.19	29.1	32.0	19.3	3.10	39.10/8886	56.0	1.72
CA557D	41.40	17.78	20.24	8.00	37.4	40.6	23.1	3.10	55.61/12639	74.3	2.60
CA620D	42.01	17.91	24.51	7.19	41.8	45.2	20.2	3.25	39.10/8886	55.1	2.35
CA2062H	38.10	22.23	12.57	5.94	29.2	31.6	18.0	3.25	31.10/6992	35.0	2.30

CA 型钢制农机链

CA type steel agricultural chains

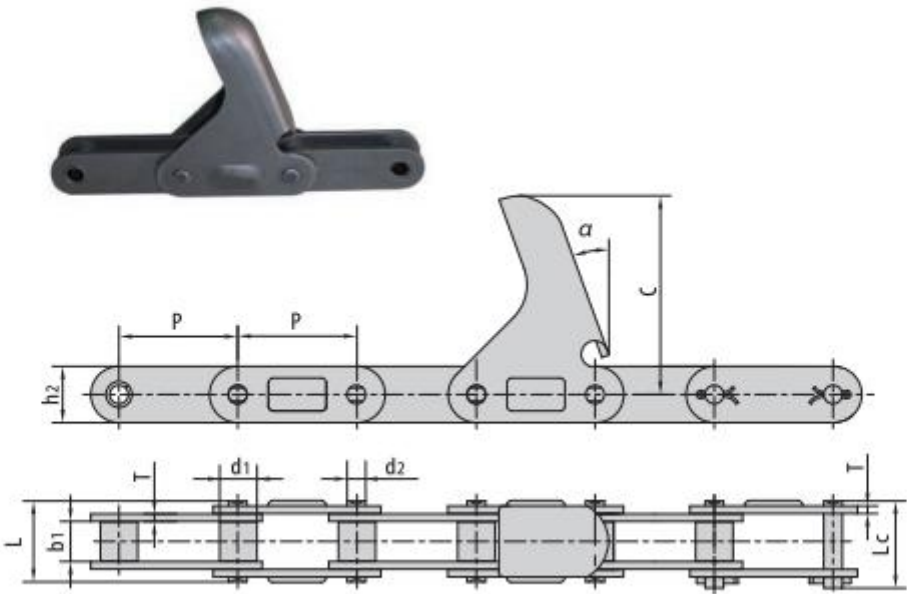



链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension				极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T	C	α	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm		kN/ bf	kg/m
CA2060-C6E	38.1	11.91	12.57	5.94	25.9	28.3	18.0	2.42	63.5	20.0°	31.1/6996	1.40
CA2060H-C6E	38.1	11.91	12.57	5.94	31.0	31.6	18.0	3.25	63.5	22.5°	31.1/6996	1.78
CA550V-C6EF1	41.4	16.80	19.05	8.28	36.1	39.1	22.0	3.00	50.5	15.0°	55/12364	2.65

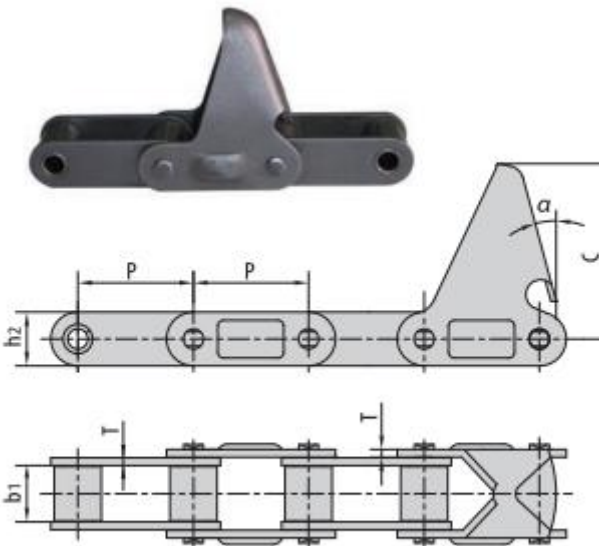

链号 ShenLong Chain No.	P	b1	h2	T	C	α
	mm	mm	mm	mm	mm	
CA550-C6E	41.40	19.81	19.30	2.70	55.6	20°
CA550-C11E	41.40	19.81	19.30	2.70	63.5	15°
CA550-C11EJ	41.40	19.81	19.30	2.70	66.0	17°
CA550-C13E	41.40	19.81	19.30	2.70	92.0	15°
CA550-C17E	41.40	20.00	19.05	2.70	76.2	15°
CA550-C19E	41.40	19.81	19.05	2.70	68.5	20°
CA550F4-C6E	41.40	20.24	19.05	2.70	55.6	22.5°
CA550-C6EF1	41.40	19.81	19.30	2.70	50.0	15°
CA620-C13E	42.01	24.51	20.20	3.25	92.0	15°

CA 型钢制农机链


CA type steel agricultural chains

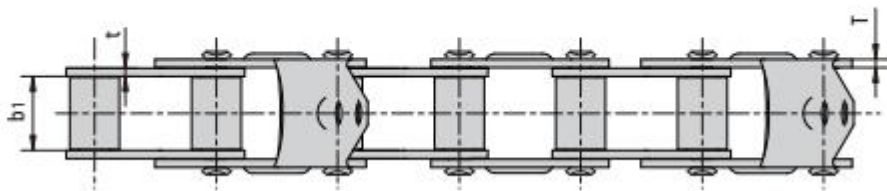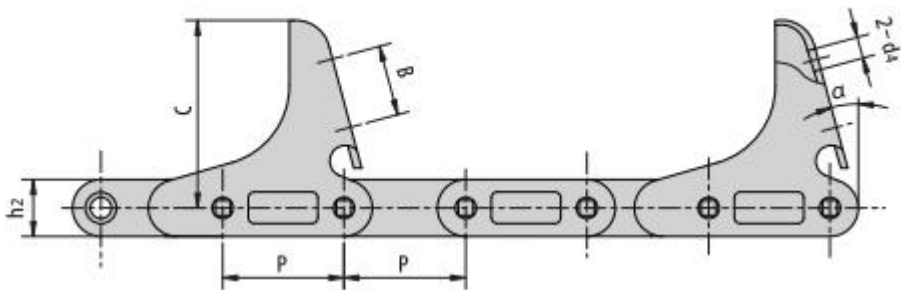

链号	P	b1	h2	t/T	C	B	d4	α
	mm	mm	mm	mm	mm	mm	mm	
CA555-C6E	41.40	12.70	19.05	3.20	63.50	-	-	15°
CA555-C6EJ	41.40	12.70	19.30	3.25	66.00	25.40	7.30	15°
CA555-C6EJF1	41.40	12.70	19.30	3.10	66.00	25.40	5.50	15°
CA555F3-C6EJ	41.40	12.70	19.30	3.15	66.00	25.40	7.30	15°
CA620F3-C6EJ	42.01	24.51	20.20	3.25/3.10	66.00	24.00	6.00	15°
CA620F5-C6EJ	40.25	24.51	20.20	3.25/3.10	66.00	24.00	6.00	15°

CA 型钢制农机链


CA type steel agricultural chains

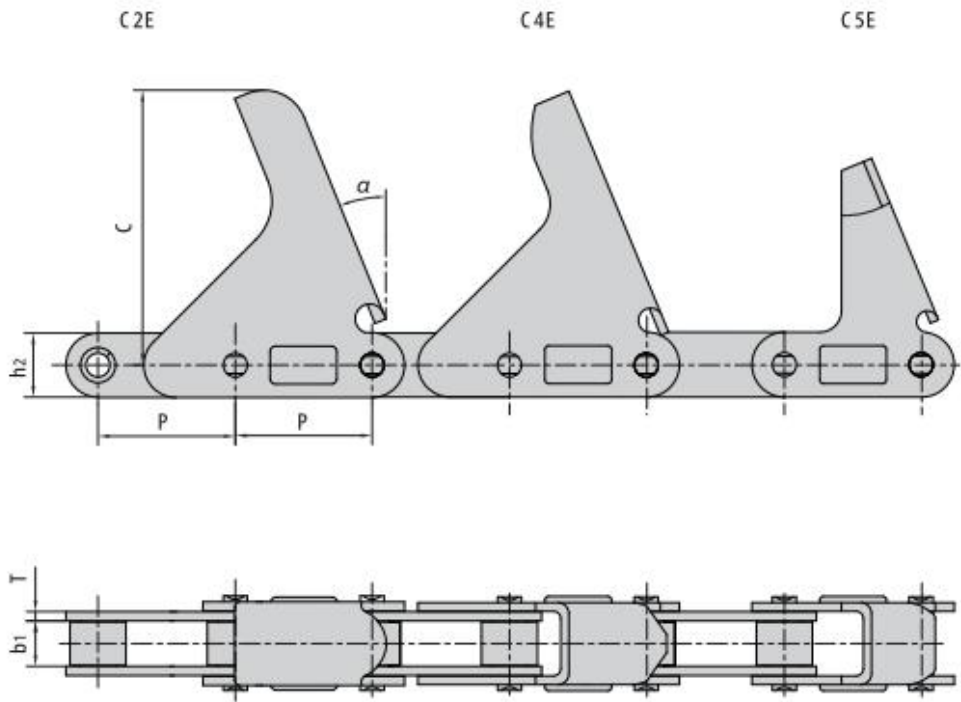


链号	P	b1	h2	T	C	α
	mm	mm	mm	mm	mm	
CA2060H-C2E	38.1	12.57	18.0	3.25	76.2	22.5°
CA2060H-C4E	38.1	12.57	18.0	3.25	75.8	22.5°
CA2060H-C5E	38.1	12.57	18.0	3.25	57.2	22.5°

CA 型钢制农机链

CA type steel agricultural chains

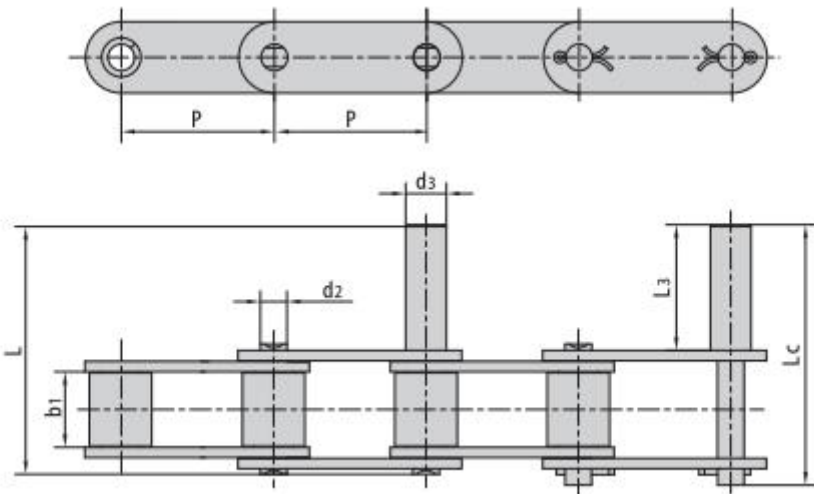


链号	P	b1	d2	d3	L3	L	Lc
	mm	mm	mm	mm	mm	mm	mm
CA550-D1	41.40	19.81	7.19	12.7	50.80	84.5	87.5
CA550-D2	41.40	19.81	7.19	7.19	31.75	65.4	68.4
CA550-D4	41.40	19.81	7.19	11.0	34.00	67.7	70.7
CA620-D1F1	42.01	24.51	7.19	12.0	44.45	84.8	88.2

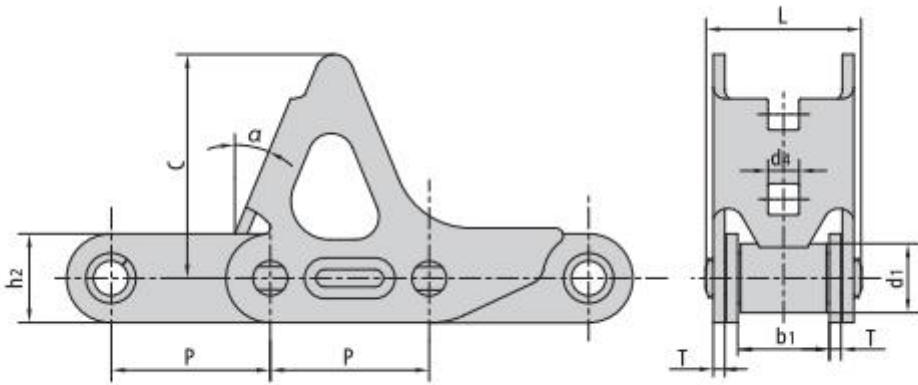


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴长度 Pin length	链板尺寸 Plate dimension					极限拉伸载荷 Ultimate tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	L max	h2 max	T	C	d4	a	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm		kN/ bf	kg/m
55VDF1-CPE	41.4	17.9	22.5	39.7	23.0	3.0	58	8.1	22.5°	50/11248	3.68

CA 型钢制农机链

CA type steel agricultural chains

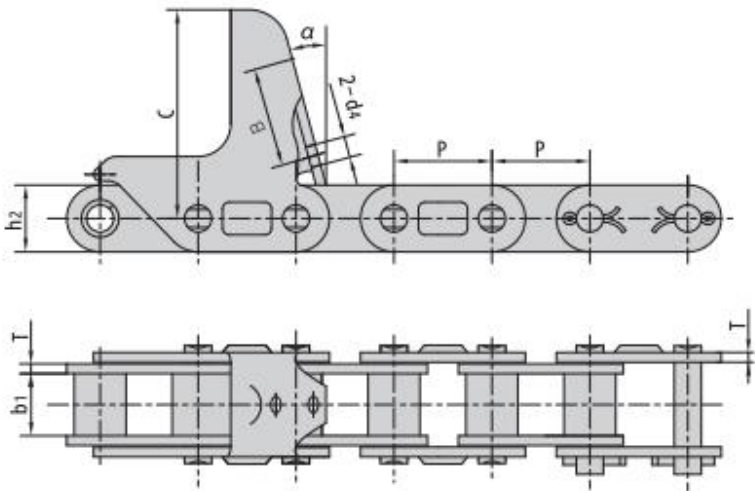


链号	P	b1	h2	B	d4	T	C	α
	mm	mm	mm	mm	mm	mm	mm	
P30-C6EF1	30.0	19.05	20.5	36.1	6.5	3.0	63.85	22.0°
P30-C6EF2	30.0	19.05	20.5	25.5	6.5	3.0	62.50	22.0°
P30-C6EF3	30.0	19.05	20.5	30.0	6.1	3.0	63.85	22.0°
P30-C6EF4	30.0	19.05	20.5	25.5	6.5	3.0	63.00	15.0°
P30-C6EF5	30.0	19.05	20.5	30.0	6.5	3.0	63.00	7.0°

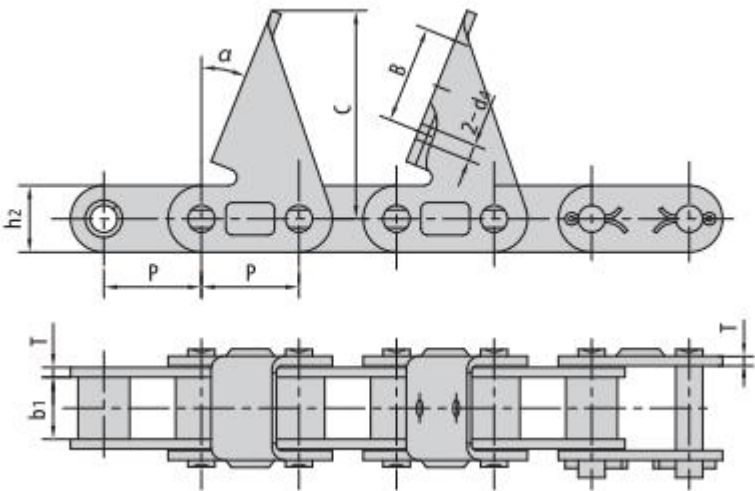


链号	P	b1	h2	B	d4	T	C	α
	mm	mm	mm	mm	mm	mm	mm	
P30-C6E	30.0	19.05	20.5	-	-	3.0	64.0	22°
P30-C6EF6	30.0	19.05	20.5	30.0	5.0	3.0	64.0	22°

CA 型钢制农机链

CA type steel agricultural chains

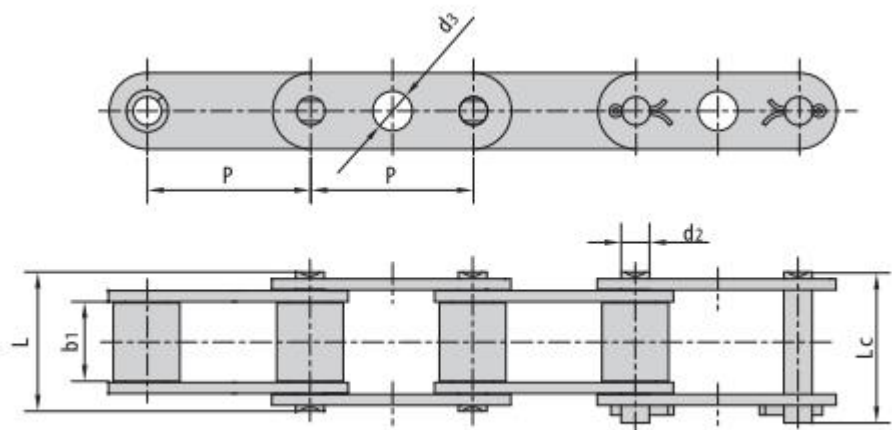


链号	P	b ₁	d ₂	d ₃	L	L _c
	mm	mm	mm	mm	mm	mm
CA550GKF1	41.4	19.81	7.19	10	35	38
CA550GKF3	41.4	19.81	7.19	12	35	38

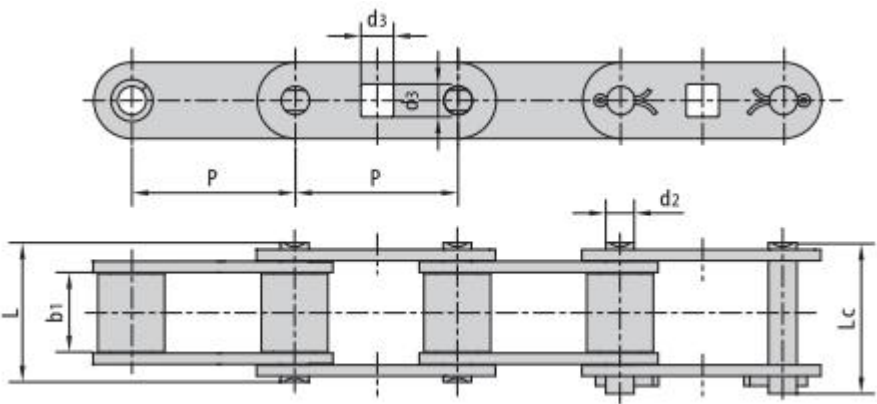


链号	P	b ₁	d ₂	d ₃	L	L _c
	mm	mm	mm	mm	mm	mm
CA550GKF2	41.4	19.81	7.19	8.3	35	38

CA 型钢制农机链

CA type steel agricultural chains

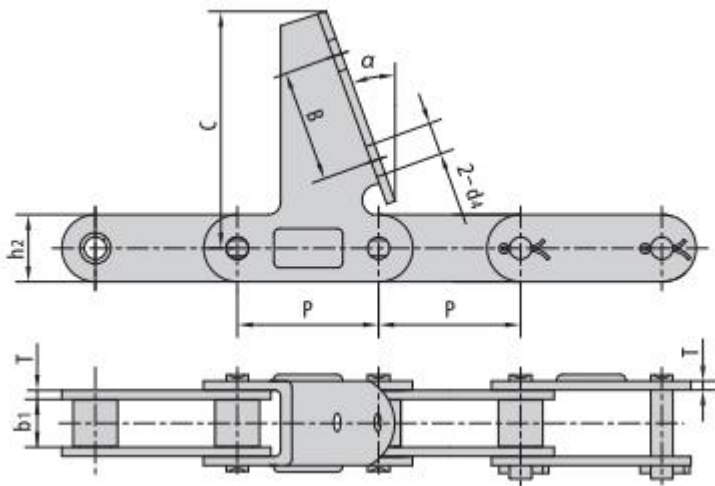


链号	P	b ₁	h ₂	d ₄	T	B	C	α
	mm	mm	mm	mm	mm	mm	mm	
CA2060H-7AUE	38.1	12.57	18.0	8.50	3.25	30.0	57.2	22.5°
CA550-CPEF1	41.4	19.81	19.3	-	2.80	-	63.5	15.0°
CA414-CPEF1	41.4	15.88	20.1	-	3.00	-	66.0	20.0°
CA2060H-CPEF2	38.1	12.57	18.0	-	3.25	-	57.0	22.0°
CA2060H-CPEF3	38.1	12.57	18.0	6.75	3.25	25.4	57.0	22.0°
P30-C6EF7	30.0	19.05	20.5	6.30×6.30	3.00	30.0	62.5	22.5°
P30-C6EF8	30.0	19.05	20.5	6.60×6.60	3.00	30.0	63.5	22.5°
P30-C6EF9	30.0	19.60	20.5	6.50	3.00	30.0	62.5	22.5°

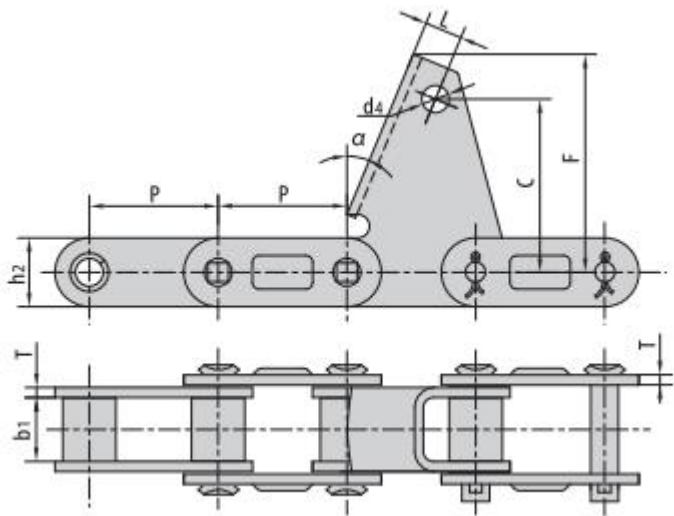


链号	P	b ₁	h ₂	L	d ₄	T	C	F	α
	mm	mm	mm	mm	mm	mm	mm	mm	
38.4VBF4	38.4	19.05	20.5	15.0	8.1	3.0	48.0	64.0	22°

CA 型钢制农机链

CA type steel agricultural chains

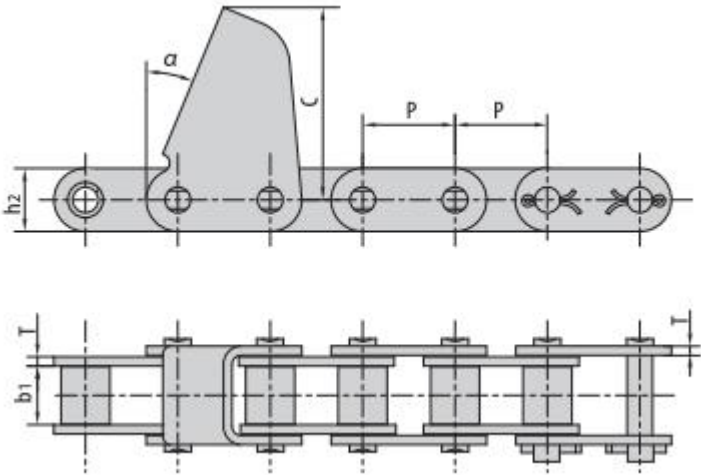


链号	P	b1	h2	T	C	α
	mm	mm	mm	mm	mm	
P30	30.0	19.00	20.5	3.0	62.5	22.5°
P30F1	30.0	19.00	20.5	3.0/2.8	62.5	22.5°
P30F2	30.0	19.60	20.5	3.0	62.5	22.5°
P30F9	30.0	19.05	20.5	3.0	62.5	22.0°
CA550-CPEF2	41.4	19.81	19.3	2.8	63.5	15.0°

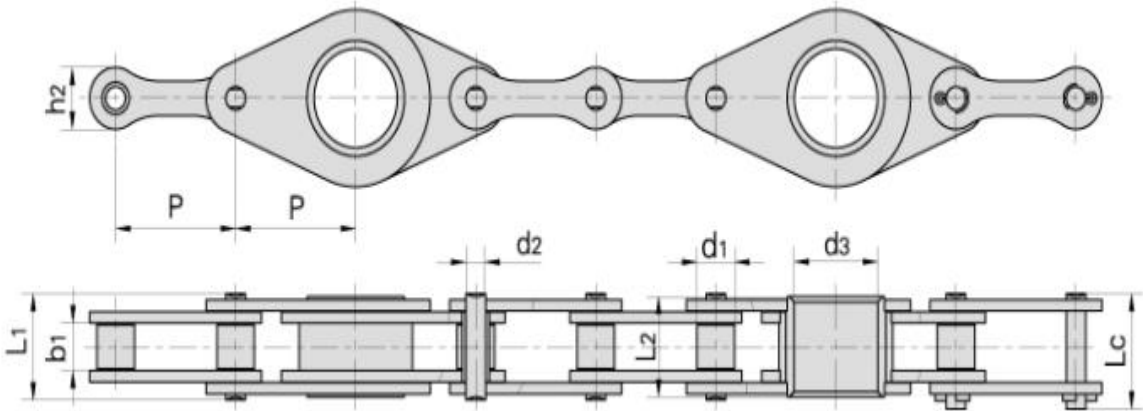

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width Between Inner plates	销轴直径 Pin diameter	空心销轴内径 Hollow pin inner diameter	销轴长度 Pin Length			内链板高度 Inner Plate depth	抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength
	P	d1 max	b1 min	d2 max	d3 max	L1 max	L2 max	Lc max	h2 max	Q min	Qa
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN
CA650F4	50.8	19.05	19.05	10.19	35.35	42	38.5	44.5	26	100	120

CA 型钢制农机链


CA type steel agricultural chains

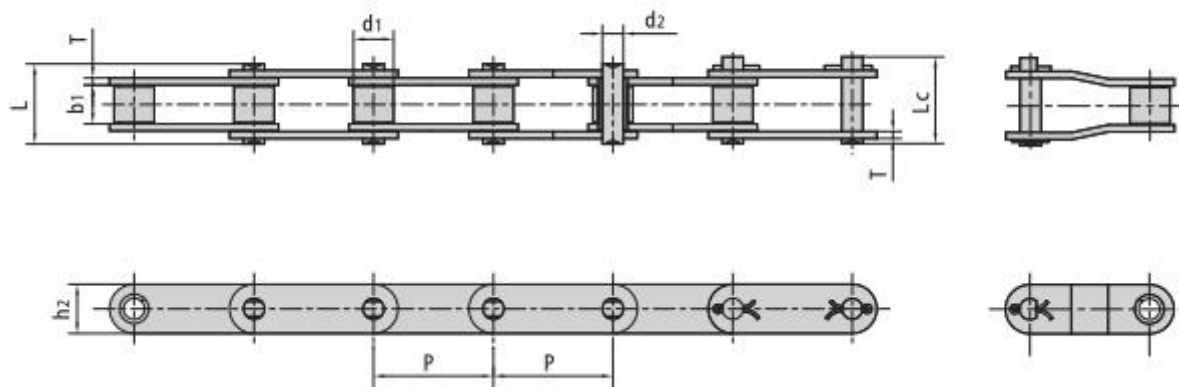

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
CA550	41.400	16.87	19.81	7.15	35.0	39.0	19.30	2.80	39.10/8886	51.2	1.94
CA550V	41.400	16.80	19.05	8.28	36.1	39.1	22.00	3.00	55.00/12499	68.7	2.24
CA555	41.400	16.87	12.70	7.19	29.1	32.0	19.30	3.10	39.10/8886	56.0	1.72
CA557	41.400	17.78	20.24	8.00	37.4	40.6	23.10	3.10	55.61/12639	74.3	2.60
CA620	42.010	17.91	24.51	7.19	41.8	45.2	20.20	3.25	39.10/8886	55.1	2.35
CA2060H	38.100	11.91	12.70	5.94	29.2	31.6	18.00	3.25	31.10/6996	40.5	1.45
CA550F4	41.400	14.35	20.24	7.14	35.0	38.5	19.05	2.80	50.00/11363	52.0	1.76
38.4R	38.400	15.88	19.05	6.92	33.8	36.4	17.30	2.50	33.00/7480	41.2	1.70
38.4V	38.400	15.88	18.00	6.92	35.0	38.0	17.30	3.00	40.00/9091	50.0	1.83
38.4VB	38.400	15.88	19.05	8.28	36.1	39.4	20.50	3.00	50.00/11363	62.5	2.17
55VD	41.400	17.90	23.00	8.22	39.3	42.4	20.00	2.80	42.00/9546	45.0	2.34
S62F3	41.910	19.05	25.40	8.00	42.0	44.6	26.00	3.00	47.00/10796	58.7	3.12
CA960	41.400	17.78	22.61	8.90	40.1	43.0	23.10	3.00	66.00/15160	72.6	6.94
CA550V	41.400	16.80	19.05	8.28	36.1	38.8	20.00	3.00	55.00/12499	68.7	2.13
CA550H	41.400	16.74	20.00	7.14	36.0	39.1	19.10	3.00	57.82/13000	60.8	2.00

C 型钢制农机链附件


C type steel agricultural chain attachments

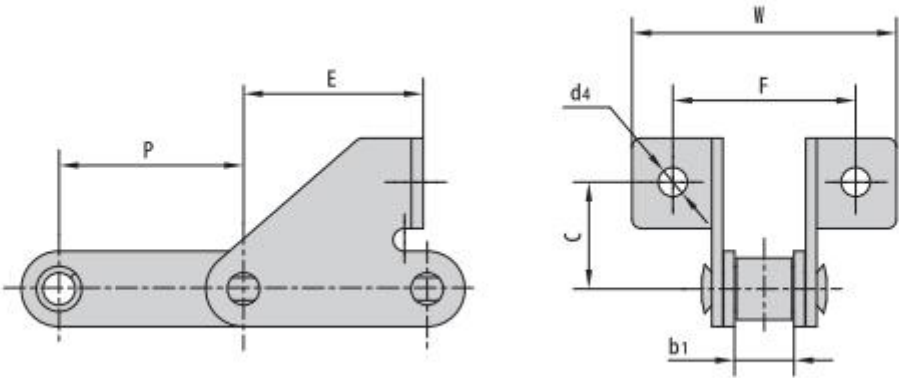

链号	P	b1	E	F	W	C	d4
	mm	mm	mm	mm	mm	mm	mm
38. 4RSD	38. 4	19. 05	38. 4	52. 0	71. 0	24. 5	8. 4
38. 4RSDF1	38. 4	19. 05	38. 4	52. 0	70. 0	24. 5	8. 4
38. 4RSDF2	38. 4	19. 05	38. 4	52. 0	71. 0	24. 5	9. 0
38. 4VSD	38. 4	18. 00	38. 4	52. 0	71. 0	24. 0	8. 4
38. 4VBSD	38. 4	19. 05	38. 4	52. 0	71. 0	25. 0	8. 4
38. 4VBSDF1	38. 4	19. 05	38. 4	52. 0	71. 0	24. 0	8. 3
38. 4VBSDF2	38. 4	19. 05	38. 4	52. 0	73. 0	24. 0	8. 7
38. 4VBSDF3	38. 4	15. 88	38. 4	52. 0	70. 1	24. 5	8. 5
38. 4RSDF4	38. 4	19. 05	37. 4	52. 0	71. 0	24. 0	8. 4
38. 4RSDF5	38. 4	19. 05	35. 9	60. 0	79. 0	24. 0	6. 4
38. 4RSDF6	38. 4	19. 05	38. 4	62. 0	81. 0	24. 5	8. 5
38. 4RSDF7	38. 4	19. 05	38. 4	60. 0	81. 0	24. 5	8. 4
38. 4RSDF8	38. 4	19. 05	38. 4	60. 0	81. 0	24. 5	6. 4
38. 4VBSDF5	38. 4	19. 05	37. 4	52. 0	73. 0	24. 0	8. 7
38. 4RSDF3	38. 4	19. 05	38. 2	52. 0	72. 0	24. 0	8. 4
38. 4RSDF10	38. 4	19. 05	38. 4	52. 0	71. 0	24. 5	8. 4

C 型钢制农机链附件



C type steel agricultural chain attachments

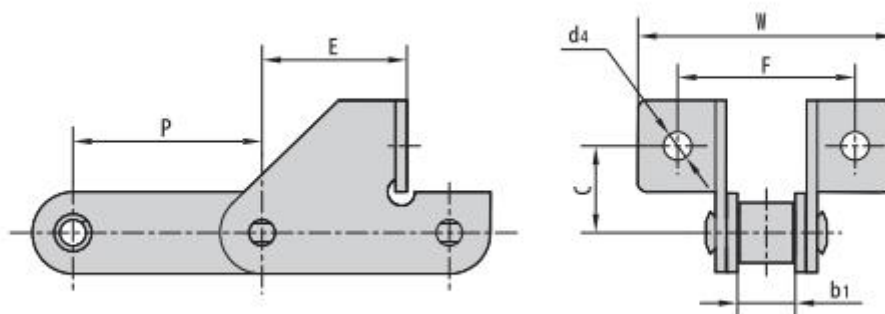



链号	P	b ₁	E	F	W	C	d ₄
	mm	mm	mm	mm	mm	mm	mm
CA550SD	41.1	19.81	36.9	47.6	68.2	31.0	8.7
CA550SDF1	41.4	19.81	35.0	58.0	85.0	20.5	8.5
CA550SDF2	41.4	19.81	32.5	62.0	84.0	20.0	8.6
CA550SDF3	41.4	19.81	35.0	58.0	85.0	20.5	6.5
CA550SDF4	41.4	19.81	36.9	47.6	89.0	31.0	8.7
CA550SDF5	41.4	19.81	34.0	63.0	89.0	20.0	8.0
CA550SDF6	41.4	19.81	33.0	58.0	85.0	20.5	6.5
CA550SDF7	41.4	19.81	32.5	62.0	89.0	20.0	8.6
CA550SDF8	41.4	19.81	33.0	58.0	85.9	20.5	6.5
CA550SDF10	41.4	19.81	37.7	47.6	68.2	31.0	8.5
CA550SDF11	41.4	19.81	31.0	58.0	85.0	20.5	8.5
CA550SDF12	41.4	19.81	31.0	58.0	85.0	20.5	6.5
CA550HSD	41.4	20.00	33.4	58.0	90.0	20.0	6.5
CA550VSD	41.4	19.05	35.0	58.0	88.6	20.5	6.5

C 型钢制农机链附件

C type steel agricultural chain attachments

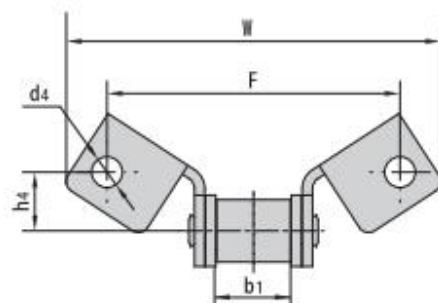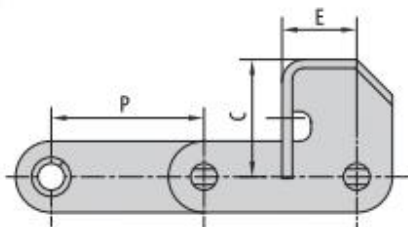


链号	P	b ₁	E	C	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
CA550F14	41.4	19.81	20.24	31.75	79.40	101.60	15.90	8.33
CA550F16	41.4	20.00	22.30	39.00	78.00	109.20	17.70	8.00
CA550VF14	41.4	19.05	20.24	31.75	79.40	101.60	15.90	8.33
CA557F14	41.4	20.24	19.60	34.00	79.40	109.80	15.88	8.60
CA557SFD	41.4	20.24	24.30	50.10	79.40	109.80	28.60	8.30
CA557SFDF1	41.4	20.24	24.30	50.10	79.40	109.80	28.60	9.53
CA550F19	41.4	19.81	20.24	31.75	79.40	101.60	15.90	10.50
CA550VF1SD	41.4	19.05	20.70	49.50	79.20	119.00	28.00	8.70
CA550VF2SD	41.4	19.05	20.70	49.50	79.20	119.00	28.00	8.70

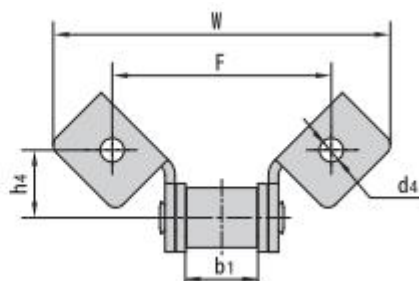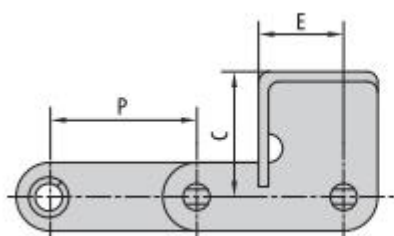

链号	P	b ₁	E	C	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm	mm
CA550F5	41.4	19.81	21.60	32.90	79.20	104.80	16.60	10.30
CA550F6	41.4	19.81	25.90	41.00	114.50	140.00	20.40	10.20
CA550F15	41.4	19.81	24.00	35.26	61.98	95.25	19.05	6.73
CA550F17	41.4	19.81	23.68	40.89	114.30	143.70	20.57	9.91
CA550VF13	41.4	19.05	25.40	59.60	79.35	135.45	28.60	8.74
CA550F18	41.4	19.81	24.00	35.26	61.98	95.25	19.05	8.33
CA550F12	41.4	20.24	23.68	40.89	114.30	143.70	20.57	9.91
CA550F5-G18	41.4	20.24	24.13	20.32	63.50	84.00	8.38	8.38
CA550VF17	41.4	19.05	23.68	40.89	114.30	143.70	20.57	9.91

C 型钢制农机链附件


C type steel agricultural chain attachments

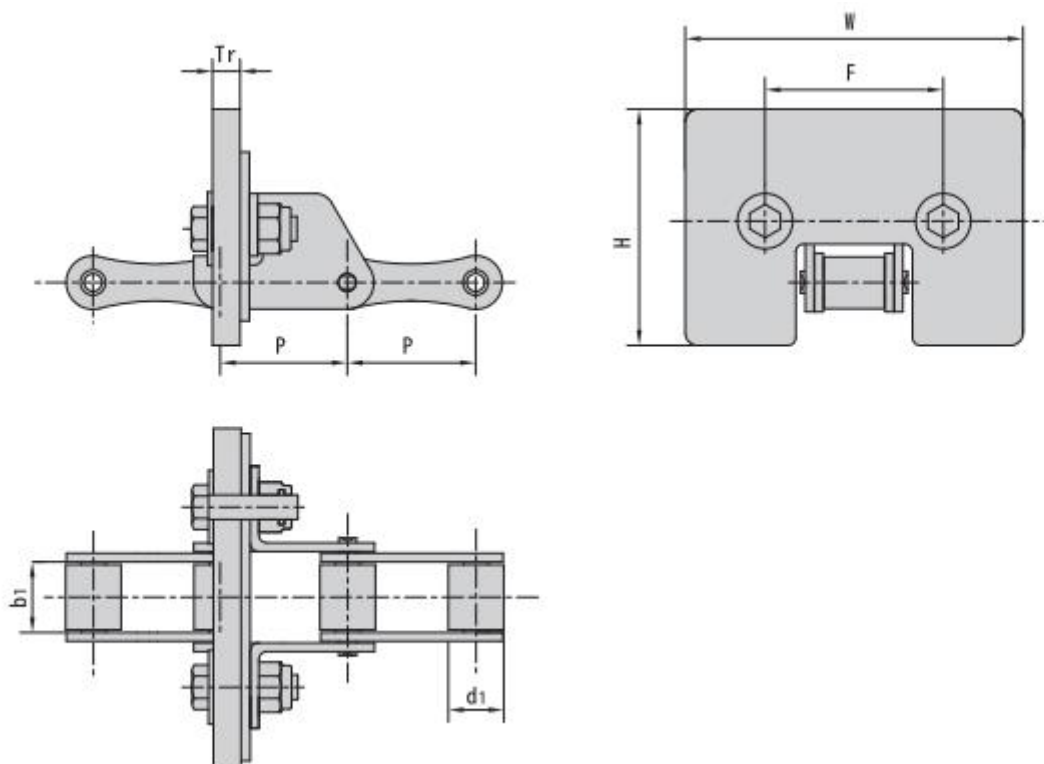


链号 Pitch	节距	滚子直径	内节内宽	橡胶附板尺寸			
	P	d1	Width	Rubber attachment dimension			
	mm	max	between inner plates	W max	H max	F	Tr
	mm	mm	mm	mm	mm	mm	mm
S45SDF1-GB	41.4	15.24	22.23	150.0	100.0	62.0	9.0
S52LF1SD-GB	38.1	15.24	16.40	152.0	80.0	54.5	9.0
S55F6-GB	41.4	17.78	22.23	110.0	85.0	58.0	9.0
38.4RSD-GB	38.4	15.88	19.05	154.0	78.0	52.0	9.0
38.4RSDF10-GB	38.4	15.88	19.05	107.0	80.0	52.0	9.0
CA550SDF1-GB	41.4	16.87	19.81	151.0	85.0	58.0	9.0
CA550F5-GB	41.4	16.87	19.81	104.8	80.0	79.2	10.0
CA550F6-GB	41.4	16.87	19.81	214.0	123.0	114.5	10.0
CA550F14-GB	41.4	16.87	19.81	152.0	79.0	79.4	9.0
CA550VF2SEL-GB	41.4	16.80	19.05	224.0	79.4	79.4	11.0
CA550HF6-GB	41.4	16.74	20.00	197.0	96.0	58.0	9.0

C 型钢制农机链附件


C type steel agricultural chain attachments

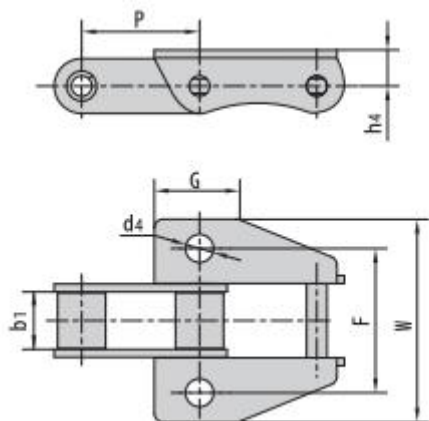

链号	P	b ₁	G	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm
CA550K39M	41.4	19.81	29.5	50.80	71.4	12.7	9.8
CA550K39MF3	41.4	19.81	29.5	50.80	71.4	12.7	10.3
CA550HK39M	41.4	20.00	31.0	57.00	78.0	14.2	10.5
CA557K39M	41.4	20.24	29.5	50.80	71.4	12.7	9.8
CA557K39MF1	41.4	20.24	22.0	57.15	77.6	14.0	9.9
CA557K39MF3	41.4	20.24	31.0	57.00	78.0	14.5	10.3
CA557K39MF7	41.4	20.24	29.5	63.00	88.0	13.5	11.0
CA557K39MF9	41.4	20.24	31.0	57.20	77.7	13.8	10.3
CA557K40M	41.4	20.24	29.5	54.00	78.0	12.7	9.8/12.5
CA550F5K39M	41.4	20.24	29.5	50.80	71.4	12.7	10.3

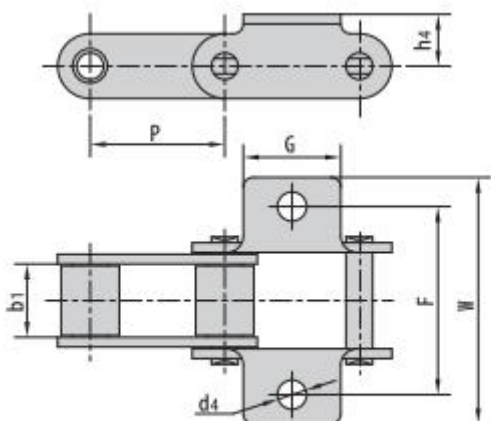


链号	P	b ₁	G	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm
CA557K1F5	41.40	20.24	32.0	54.0	75.8	15.9	10.5
CA557K1F1	41.40	20.24	38.1	74.6	105.6	12.7	10.3
CA557K1F2/F3	41.40	20.24	22.0	51.0	74.2	15.9	10.5
CA557K1F4	41.40	20.24	38.1	75.0	108.0	15.5	10.5
CA557K1F6	41.40	20.24	25.0	50.6	76.0	17.3	8.9
CA557K1F8	41.40	20.24	22.0	54.1	79.0	15.9	10.5
CA550K1	41.40	19.81	22.0	52.5	76.2	12.7	8/10
CA550K1F5	41.40	19.81	38.1	74.6	105.6	12.7	10.3
CA550K1F7	41.40	19.81	22.0	54.5	71.12	12.7	8.5
CA550K1F9	41.40	19.81	22.0	51.0	74.2	12.7	10.5
CA550K1F10	41.40	19.81	22.0	54.0	76.2	16.5	8.5
CA550K1F12	41.40	19.81	22.0	53.8	76.2	12.7	8.5

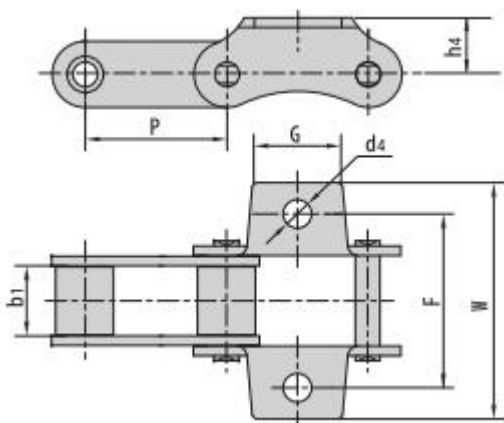

链号	P	b ₁	G	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm	mm	mm
CA550F1	41.4	19.81	22.23	53.95	70.6	12.7	9.90
CA550K19F3	41.4	19.81	25.50	50.80	68.4	16.5	8.33
CA550VK19F1	41.4	19.05	25.50	50.80	67.8	16.5	8.33
CA557AK4	41.4	20.24	26.19	50.80	69.4	16.5	8.33
CA550F20K19	41.4	20.24	22.00	50.80	71.0	12.7	9.75
CA557AK4F1	41.4	20.24	26.00	53.50	80.6	16.5	10.70



C 型钢制农机链附件

C type steel agricultural chain attachments

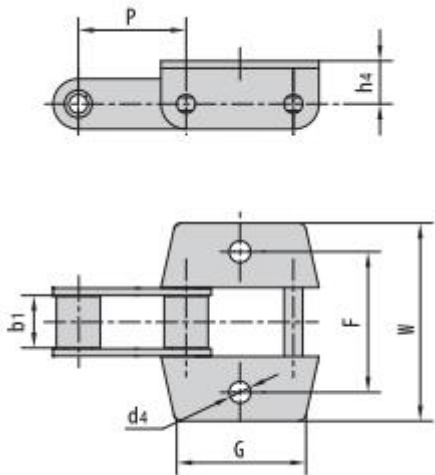

链号	P	b1	G	F	W	h4	d4
	mm	mm	mm	mm	mm	mm	mm
CA557K1F5	41.4	20.24	32.0	54.0	75.8	12.7	15.9
CA550K1F4	41.4	19.08	48.5	54.0	76.2	16.5	8.5
CA550VK1F3	41.4	19.05	33.0	54.0	83.0	15.1	8.5


链号	P	b1	G	F	W	h4	d4	K
	mm	mm	mm	mm	mm	mm	mm	mm
CA550K19	41.4	19.81	22.0	50.8	71.0	12.7	8.3	11.0
CA550K19F1	41.4	19.81	22.0	54.0	71.0	12.7	8.3	11.0
CA550K19F2	41.4	19.81	25.4	50.8	71.0	12.7	8.4	11.5

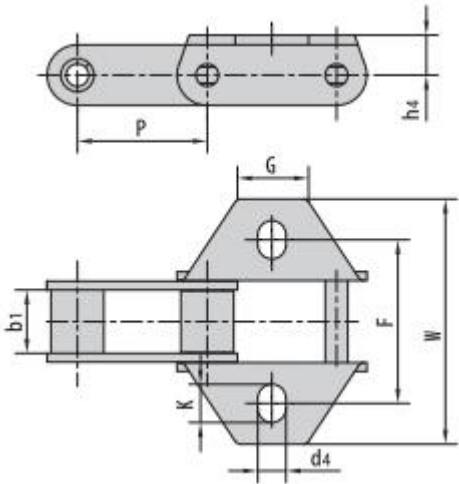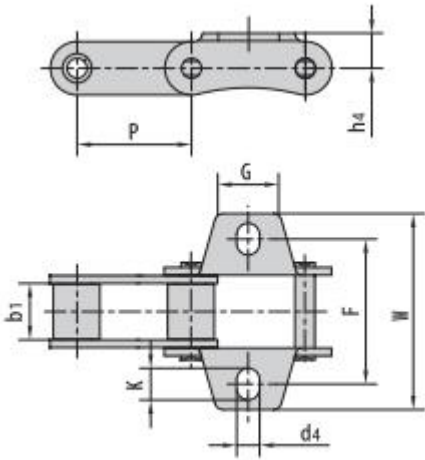


链号	P	b1	G	F	W	h4	d4	K
	mm	mm	mm	mm	mm	mm	mm	mm
CA557F2	41.4	20.24	22.23	53.98	79.3	14.3	9.9	13.6

C 型钢制农机链附件

C type steel agricultural chain attachments

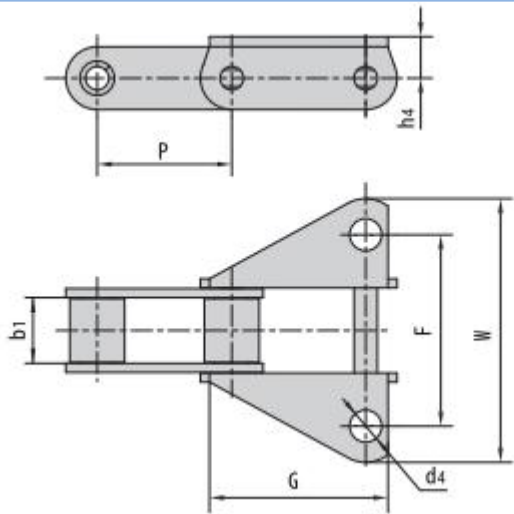


链号	P	b1	G	F	W	h4	d4
	mm	mm	mm	mm	mm	mm	mm
CA557F1	41.4	20.24	60.0	53.94	76.2	14.6	9.9
38.4VBK39M	38.4	19.05	20.0	58.00	86.4	14.0	10.5
38.4VBF8	38.4	19.05	20.0	58.00	87.4	14.0	10.5

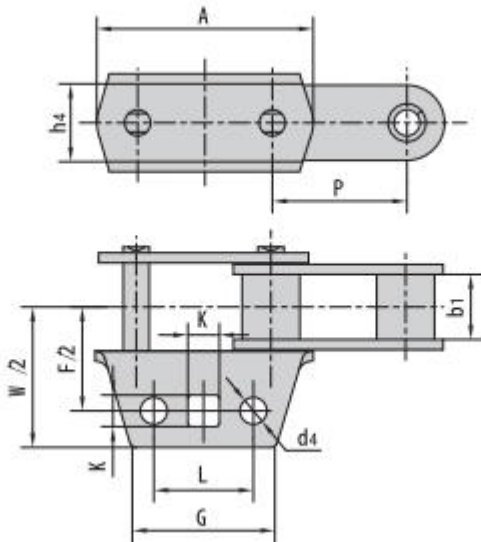


链号	P	b1	A	L	G	F	W	h4	d4	K
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
CA557F3	41.4	20.24	66.55	30.22	44.45	64.14	86.6	23.9	8.25	9.7

C 型钢制农机链附件

C type steel agricultural chain attachments

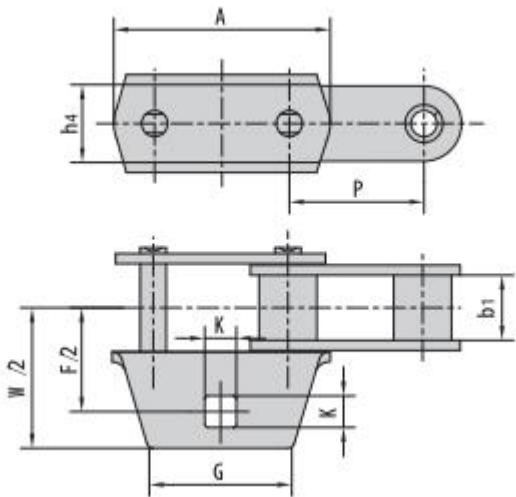


链号	P	b1	A	G	F	W	h4	K
	mm	mm	mm	mm	mm	mm	mm	mm
CA557F4	41.4	20.24	66.55	44.45	64.14	86.6	23.9	9.7

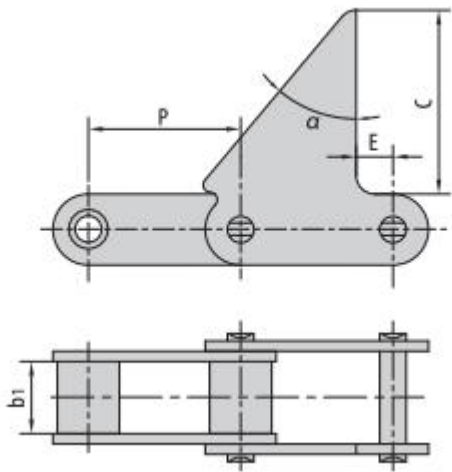

链号	P	b1	C	α	E
	mm	mm	mm		mm
CA550F6	41.4	19.81	50.0	40°	10
CA550F9	41.4	19.81	40.7	40°	10

S 型钢制农机链


S type steel agricultural chains

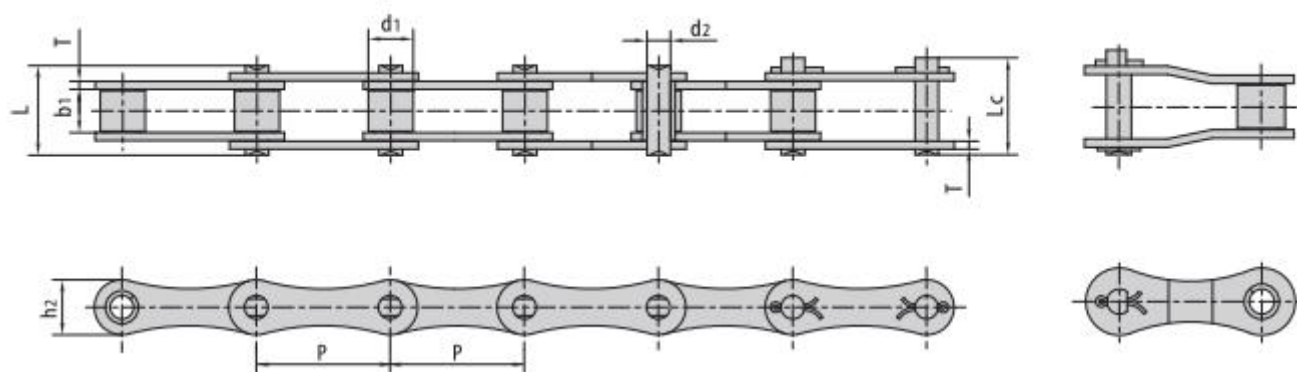


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	t/T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/ bf	kN	kg/m
S32	29.21	11.43	15.88	4.45	26.7	28.8	13.2	1.8	8.0/1818	21.6	0.86
S32V	29.21	11.43	15.88	5.08	27.3	29.7	13.5	2.1	25.0/5680	27.0	0.96
S42	34.93	14.27	19.05	7.00	34.3	37.0	19.8	2.8	27.0/6136	50.8	1.60
S45	41.40	15.24	22.23	5.72	37.7	40.4	17.3	2.8	18.0/4091	36.1	1.66
S51	38.10	15.24	16.00	5.72	30.9	33.8	17.3	2.8	28.0/6364	30.8	1.48
S52L	38.10	15.24	16.40	5.72	30.9	33.8	16.5	2.5	29.2/6636	32.2	1.36
S52LV	38.10	15.88	17.80	6.94	33.8	37.0	16.7	3.0	30.0/6818	32.5	1.58
S52	38.10	15.24	22.23	5.72	37.7	40.4	17.3	2.8	18.0/4091	36.1	1.68
55V	41.40	17.90	22.23	8.22	39.3	42.4	20.0	3.0	42.0/9546	45.0	2.22
55VF1	41.40	17.90	22.23	8.22	39.3	42.4	21.4	3.0	45.0/10227	73.1	2.32
S55	41.40	17.78	22.23	5.72	37.7	40.4	17.3	2.8	18.0/4091	36.1	1.80
S55R	41.40	17.78	22.23	8.90	41.0	44.0	22.4	3.5	45.0/10227	73.1	2.49
S55RH	41.40	17.78	22.23	8.90	43.2	46.4	22.4	4.0	65.0/14772	84.5	2.74
S55RHF1	41.40	25.00	22.23	8.90	43.2	46.4	22.4	4.0	65.0/14772	84.5	2.74
S62	41.91	19.05	26.20	5.72	40.3	43.0	17.3	2.5	26.7/6067	36.1	1.87
S62F5	41.91	19.05	26.20	5.72	40.3	43.0	16.7	2.5	26.7/6067	36.1	2.07
S77	58.34	18.26	22.23	8.90	43.2	46.4	26.2	4.0	45.0/10227	73.1	2.66
S88	66.27	22.86	28.58	8.90	49.8	53.0	26.2	4.0	45.0/10227	73.1	3.25
CA642	41.40	15.88	19.00	8.28	36.1	39.1	21.2	3.0	50.0/11363	55.0	1.98
CA650	50.80	25.00	18.90	9.53	40.4	44.7	25.0	4.0	90.0/20454	95.5	3.49
CA650F2	50.80	20.00	18.90	9.53	40.4	44.7	25.0	4.0	90.0/20454	95.5	2.98
S42F2	34.93	14.27	19.05	7.00	34.3	37.0	19.8	2.5/3.0	27.0/6136	50.8	1.82
S52F10	38.10	14.00	22.00	6.92	36.5	39.1	18.2	2.5	23.5/5283	28.2	1.60
S62F10	41.91	19.05	25.40	5.72	39.4	42.2	17.3	2.5	26.7/6067	36.1	2.04
S62F8	41.91	19.05	27.90	10.00	44.9	49.3	25.0	3.0	45.0/10227	60.0	2.96
CA620F4	42.01	19.05	27.90	10.19	44.9	46.5	25.0	3.0	45.0/10277	60.0	2.95

ZGS38 联合收割机链及附件

ZGS38 combine chain with attachments

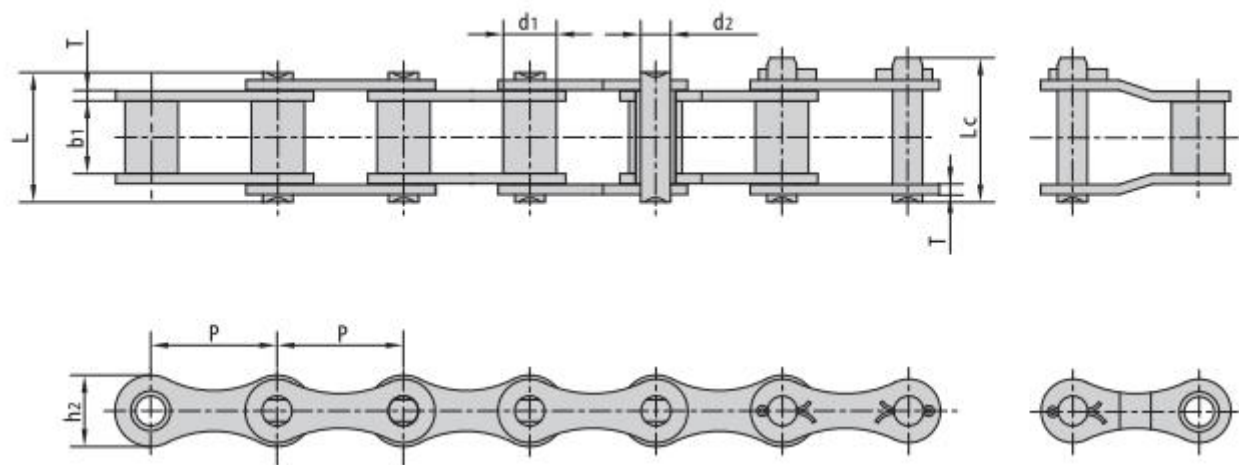


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
ZGS38	38.0	16.0	22.00	9.0	39.0	43.0	21.5	3.0	40.0/9091	55.3	2.00

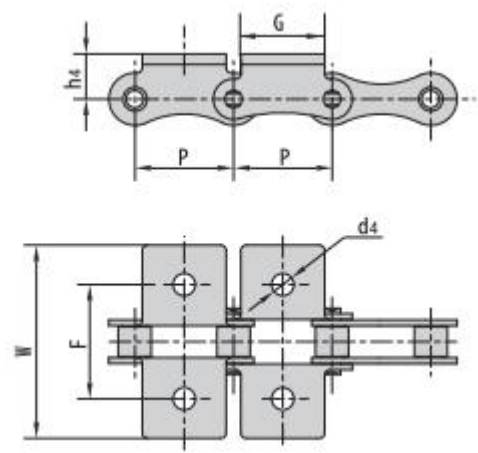


链号	P	G	F	W	h4	d4
	mm	mm	mm	mm	mm	mm
ZGS38K1	38.0	32.0	53.0	83.2	20.0	8.5

ZGS38 联合收割机链及附件

ZGS38 combine chain with attachments

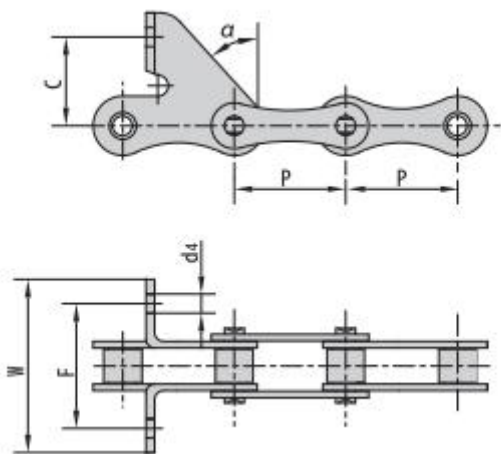


链号	P	C	F	W	α	d ₄
	mm	mm	mm	mm		mm
ZGS38F3	38.0	30.0	52.0	68.4	43.5°	6.5
ZGS38F16	38.0	61.0	49.0	68.0	25.0°	7.0
ZGS38F21	38.0	30.0	52.0	68.4	43.5°	6.5

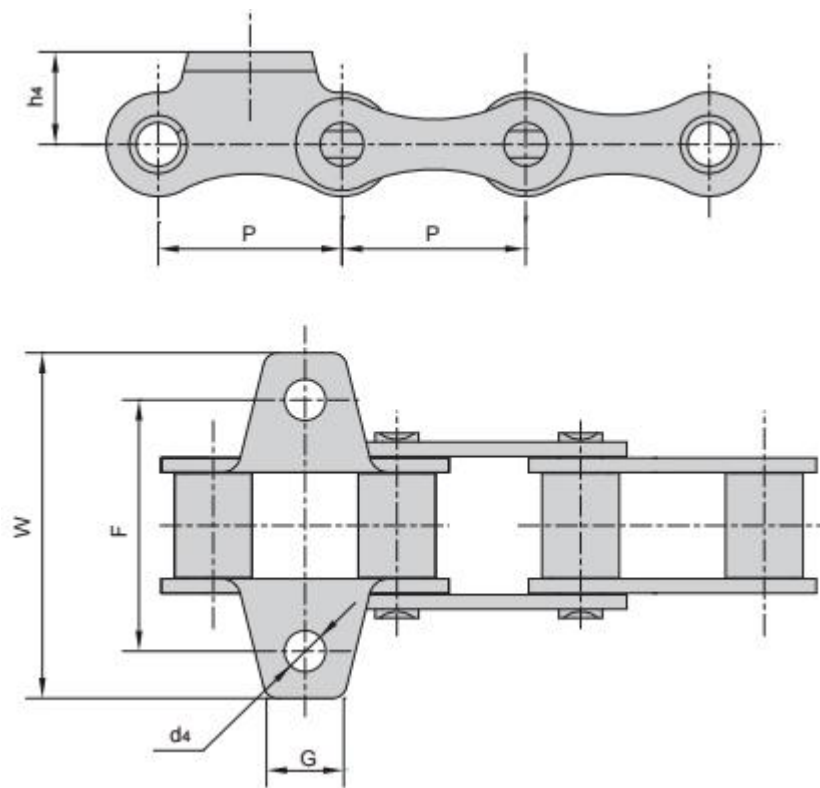


链号	P	G	F	W	h ₄	d ₄
	mm	mm	mm	mm	mm	mm
ZGS38F2	38.0	17.8	52.0	72.0	19.6	11.2
ZGS38F6K1	38.0	16.0	52.0	74.6	19.6	8.5
ZGS38F10K1	38.0	20.0	52.0	72.0	17.0	8.4
ZGS38F13K1F1	38.0	20.0	52.0	80.0	17.0	8.6
ZGS38HF12K1F1	38.0	25.0	52.0	72.0	17.0	8.4
ZGS38F11	38.0	21.0	52.0	72.0	19.6	8.5

联合收割机链
Combine chains

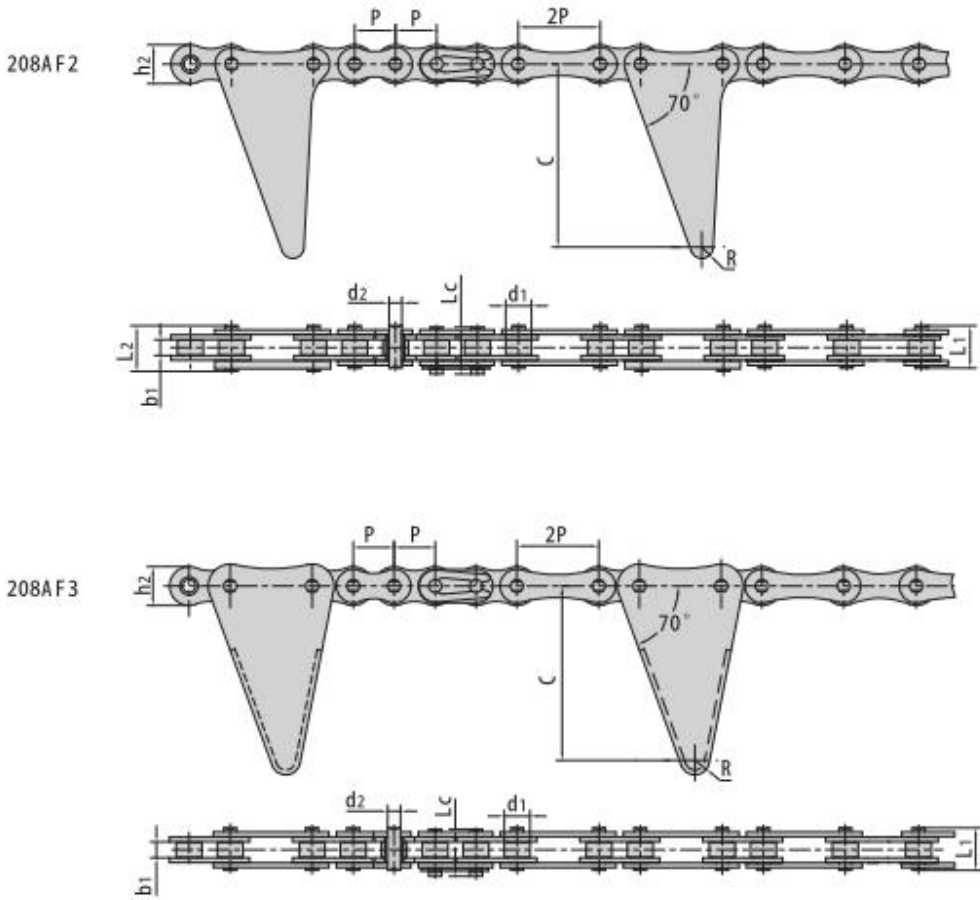


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length			内链板高度 Inner plate depth	附板尺寸 Attachment dimension		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength
	P	d1 max	b1 min	d2 max	L1 max	L2 max	Lc max	h2 max	C	R	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN
208AF2	12.7	7.95	4.80	3.96	13.1	14.7	14.5	12.0	56.5	3.5	13.8/3136	16.0
208AF3	12.7	7.95	4.80	3.96	13.1	-	14.5	12.0	60.5	4.5	13.8/3136	16.0
208AF3A	12.7	7.95	7.85	3.96	16.6	-	17.8	12.0	60.5	4.5	13.8/3136	16.0

联合收割机链
Combine chains

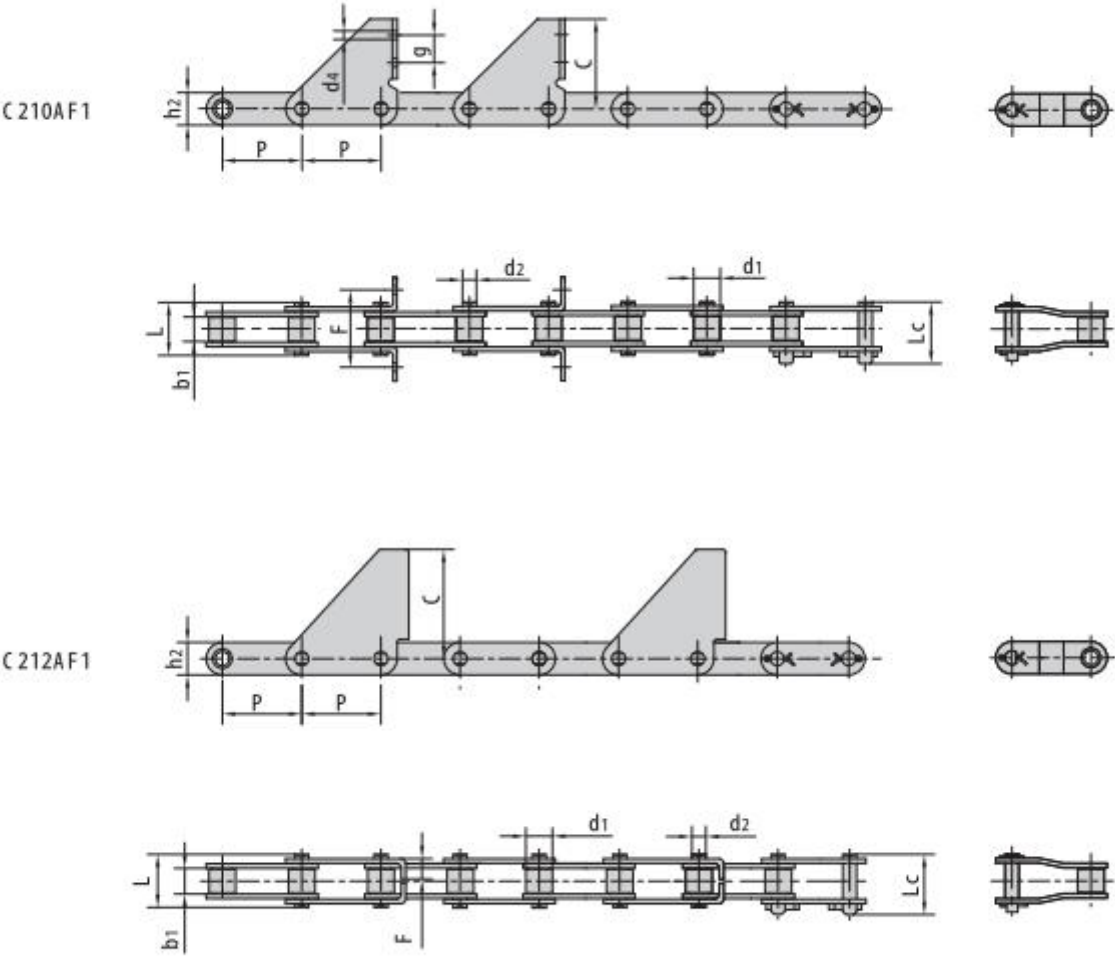


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	附板尺寸 Attachment dimension				极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	F	C	d4	g	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN
C210AF1	31.75	10.16	9.40	5.08	20.7	23.3	15.0	35.20	54.0	7.0	23.0	21.8/4955	28.5
C212AF1	38.10	11.91	12.57	5.94	25.9	28.3	18.0	10.92	56.0	-	-	31.1/7068	38.7

水稻收割机链
Rice harvester chain

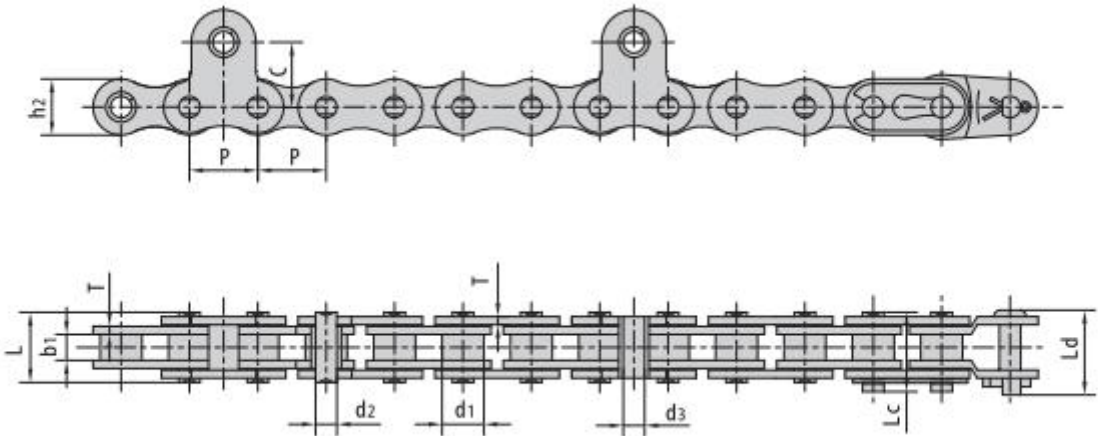


链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length			内链板高度 Inner plate depth	链板厚度 Plate thickness	附板尺寸 Attachment dimension		极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength
	P	d1 max	b1 min	d2 max	L max	Lc max	Ld max	h2 max	T max	d3 nom	C	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN
415	12.7	7.77	4.90	3.64	11.0	12.1	12.95	9.5	1.1	4.02	12.0	6.86/1559	8.1
415F4	12.7	7.77	4.68	3.62	11.8	—	—	9.6	1.3	4.00	12.0	10.30/2341	12.1
415F5	12.7	7.77	4.68	3.63	11.8	13.0	14.00	9.6	1.3	4.00	12.0	10.30/2341	12.1
415S	12.7	7.77	4.80	3.96	13.0	14.5	15.70	12.0	1.5	—	—	15.69/3566	16.3
415SF1	12.7	7.77	4.90	3.96	13.0	14.5	15.70	12.0	1.5	4.45	12.0	13.80/3136	16.3
415SF2	12.7	7.77	4.80	3.96	13.0	14.5	15.70	12.0	1.5	3.96	12.0	13.93/3166	16.3

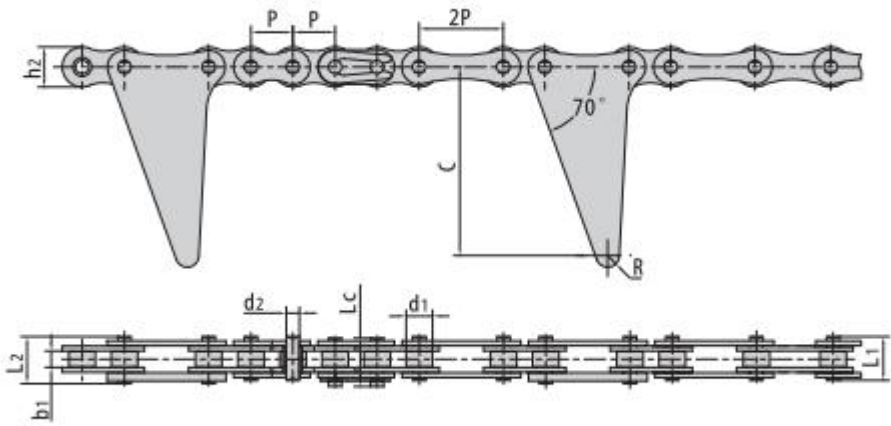

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length			内链板高度 Inner plate depth	附板尺寸 Attachment dimension		链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength
	P	d1 max	b1 min	d2 max	L1 max	L2 max	Lc max	h2 max	C	R	T/T1 max	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN
415SF4	12.7	7.77	4.80	3.96	13.0	14.7	14.5	12.0	60.8	3.5	1.5/2.7	13.8/3136	16.0
415SF5	12.7	7.77	4.80	3.96	13.0	14.7	14.5	12.0	60.8	3.5	1.5/2.42	13.8/3136	16.0

水稻收割机链


Rice harvester chains

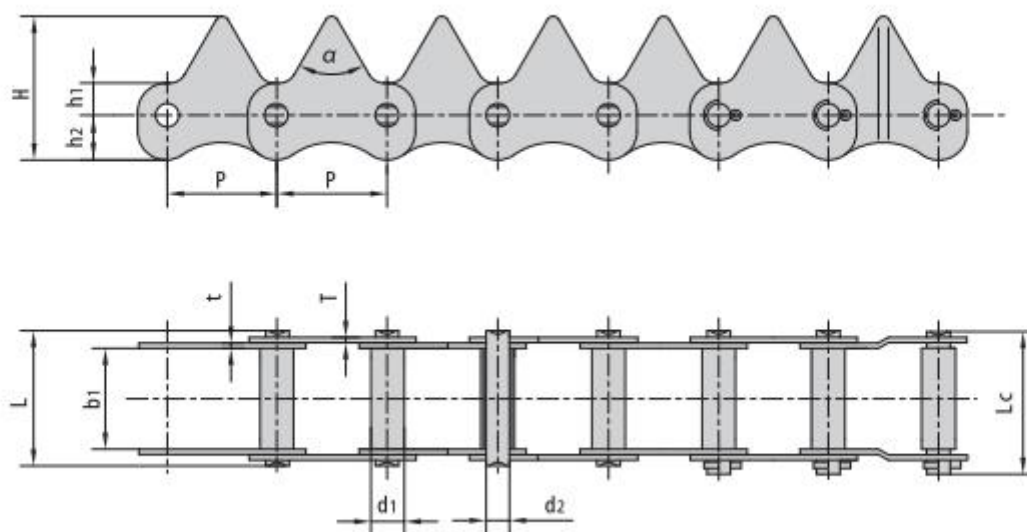

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		链板尺寸 Plate dimension				链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载荷 Average tensile strength
	P	d1 max	b1 min	d2 max	L max	Lc max	α	h1	h2	H	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	kN/lbf	kN
3325-4LB1.35	33	10.1	25.0	7.0	37.00	39.50	90°	10	13	38	2.03	19.60/4455	24.0
3325-4LB1.45	33	10.1	25.0	7.0	35.60	37.60	70°	10	13	38	1.70	19.60/4455	22.5
3325-3572	33	10.1	25.0	7.0	36.80	39.00	70°	10	13	38	2.00/1.60	19.60/4455	23.0
3325-1E6410	33	10.1	25.0	7.0	36.80	39.00	90°	10	13	38	2.00/1.60	19.60/4455	23.0
3325-3555	33	10.1	25.0	7.0	36.80	39.00	70°	10	13	38	2.00/1.60	19.60/4455	22.5
3330-4LB1.45	33	10.1	30.0	7.0	40.30	42.70	60°	10	13	43	1.70	19.60/4455	22.5
3340-3572	33	10.1	40.0	7.0	51.80	54.00	70°	10	13	38	2.00/1.60	19.60/4455	23.0
3340-1E8570	33	10.1	40.0	7.0	49.20	52.50	90°	18	10	38	1.60/1.20	19.60/4455	22.0
3340-3555	33	10.1	40.0	7.0	50.35	52.65	70°	18	10	43	1.60	19.60/4455	22.5
3350-3555	33	10.1	50.0	7.0	60.20	62.50	70°	18	10	43	1.60	19.60/4455	22.5
3358-1E8350	33	10.1	58.0	7.0	68.00	72.00	90°	18	10	38	1.60	19.60/4455	22.5
3358-1E7070	33	10.1	58.0	7.0	68.00	-	90°	18	10	38	1.60	19.60/4455	22.5
3358-6365	33	10.1	58.0	7.0	68.20	70.50	70°	18	10	43	1.60	19.60/4455	22.5
3540-0875	35	10.1	40.0	7.0	50.20	52.50	70°	18	10	43	1.60	19.60/4455	22.5
3540-3572	35	10.1	40.0	7.0	50.20	52.50	70°	10	10	35	1.60	19.60/4455	22.5
3550-5080	35	10.1	50.0	7.0	60.20	62.50	70°	18	10	38	1.60	19.60/4455	22.5
3558-4LB1.35	35	13.2	58.0	9.4	70.00	73.20	90°	15	18	47	2.03	22.54/5123	27.1
3322C	33	12.7	22.0	5.94	36.40	39.30	70°	10	13	38	2.42	17.64/4010	20.0
3325C	33	12.7	25.0	5.94	39.40	42.30	70°	10	15	40	2.42	19.60/4455	20.0
3330C	33	12.7	30.0	5.94	44.40	47.40	70°	10	15	53	2.42	19.60/4455	20.0
3358C	33	12.7	58.0	7.0	70.40	73.50	90°	15	13	46	2.03	19.60/4455	20.0

水稻收割机链

Rice harvester chains

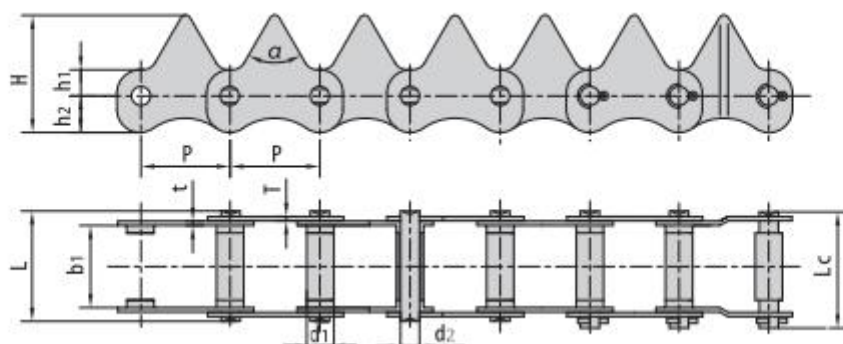

链号	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		齿形角 Tooth angle	链板尺寸 Plate dimension			链板厚度 Plate thickness	极限拉伸载荷 Ultimate tensile strength	平均拉伸载 荷 Average tensile strength
	P	d1 max	b1 min	d2 max	L max	Lc max	α	h1	h2	H	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	kN/lbf	kN
3322T-52800	33	10.1	22.0	7.0	31.5	34.5	70°	10	13	38	1.6	17.64/4010	20.2
3322T-28241	33	12.1	21.3	7.0	31.8	34.1	60°	10	13	43	1.6	19.60/4455	22.5
3325T-23151	33	10.1	25.0	7.0	35.5	37.7	60°	10	13	43	1.6	19.60/4455	22.5
3325T-49201	33	10.1	25.0	7.0	35.5	37.7	90°	10	13	38	1.6	19.60/4455	22.5
3325T-A0680110	33	10.1	25.0	7.0	35.5	37.7	70°	10	13	38	1.6	19.60/4455	22.5
3325T-A0680110F1	33	12.6	25.0	7.0	35.5	37.7	70°	10	13	38	1.6	19.60/4455	22.5
3325T-3650	33	10.1	25.0	7.0	35.5	37.7	70°	10	13	38	1.6	19.60/4455	22.5
3330T-27151	33	10.1	30.0	7.0	40.5	42.8	70°	10	13	38	1.6	19.60/4455	22.5
3330T-28241	33	10.1	30.0	7.0	40.5	42.8	60°	10	13	43	1.6	19.60/4455	22.5
3330T-28241F1	33	12.6	30.0	7.0	40.5	42.8	60°	10	13	43	1.6	19.60/4455	22.5
3330T-28241F2	33	12.1	29.3	7.0	39.8	42.1	60°	10	13	43	1.6	19.60/4455	22.5
3330T-3501	33	10.1	30.0	7.0	40.5	42.8	70°	10	13	38	1.6	19.60/4455	22.5
3330T-59750	33	10.1	30.0	7.0	39.5	42.5	60°	10	13	43	1.6	19.60/4455	22.5
3330T-5028	33	10.1	30.0	7.0	40.9	43.7	60°	10	13	43	1.6/2.0	19.60/4455	22.5
3330T-52200	33	10.1	30.0	7.0	40.9	43.7	60°	10	13	43	1.6/2.0	19.60/4455	22.5
3335T-27151	33	10.1	35.0	7.0	45.5	47.8	70°	10	13	38	1.6	19.60/4455	22.5
3358T-3330	33	10.1	58.0	7.0	68.0	72.0	90°	18	10	38	1.6	19.60/4455	22.5
3358T-53871	33	10.1	58.0	7.0	68.0	70.8	75°	18	10	43	1.6	19.60/4455	22.5
3358T-6365	33	10.1	58.0	7.0	68.2	72.0	75°	18	10	43	1.6	19.60/4455	22.5
3330T-28242	33	12.8	30.0	7.0	40.5	42.8	60°	10	13	43	1.6	19.60/4455	22.5
3330T-27152	33	12.8	30.0	7.0	40.5	42.8	70°	10	13	38	1.6	19.60/4455	22.5
3350T-744	33	10.1	50.0	7.0	60.2	63.0	90°	18	10	38	1.6	19.60/4455	22.5
3325T-699	33	10.1	25.0	7.0	36.2	39.3	90°	10	13	38	2.0/1.6	19.60/4455	22.5
3325T-3817	33	10.1	25.0	7.0	36.2	39.0	90°	10	13	38	2.0/1.6	19.61/4455	22.5
3330T-3817	33	12.1	30.0	7.0	40.5	42.8	60°	10	13	43	1.6	19.61/4455	22.5
3330T-53981	33	12.8	30.0	7.0	40.5	42.8	70°	10	13	38	1.6	19.60/4455	22.5
3330T-5441	33	10.1	30.0	7.0	40.9	43.7	60°	10	13	43	1.6/2.0	19.61/4455	22.5
3358T-6365F1	33	12.8	58.0	7.0	68.2	72.0	75°	18	10	43	1.6	19.6/4455	22.5
3325T-5060	33	10.1	25.0	7.0	36.8	39.0	70°	10	13	38	1.6/2.0	19.61/4455	22.5
3350T-6379	33	10.1	50.0	7.0	60.2	62.5	75°	18	10	43	1.6	19.6/4455	22.5

链传动维护保养 Maintenance For Roller Chain Drive

■ 滚子链传动的维护保养

由于链传动应用的广泛性，阐明其常规的保养与维修方法是有实用意义的，保养与维修做的越好，链传动的故障就越少，实践表明，使用中如能遵守几条相当简单的保养与维护原则，就可以节约费用，延长使用寿命，充分发挥链传动的工作能力：

1、传动的各个链轮应当保持良好的共面性，链条通道应保持畅通；2、链条松边垂度应保持适当。对可调中心距的水平和倾斜传动，链条垂度应保持为中心距的 1%~2%左

右，对垂直传动或受振动载荷、反向传动及动力制动时，应使链条垂度更小些。经常检查和调整链条松边垂度是链传动保养工作中的重要项目。

3、经常保持良好的润滑，这是保养工作中的重要项目。不管采用哪种润滑方式，最重要的能使润滑油脂很及时很均匀地分布到链条铰链的间隙中去。如无必要，尽量不采用粘度较大的重油或润滑脂，因为它们使用一段时间后易与尘土一起堵塞通往铰链摩擦表面的通路（间隙）。应定期将滚子链进行清洗去污，并经常检查润滑效果，必要时应拆开检查销轴和套筒，如摩擦表面呈棕色或暗褐色时，一般是供油不足，润滑不良。

4、链条链轮应保持良好的工作状态。5、经常检查链轮轮齿工作表面，如发现磨损过快，及时调整或更换链轮。

滚子链传动故障维修指导

故障症状	可能的原因	维修措施
噪声过大	1. 链轮不对正	1. 重新对正链轮
	2. 松边垂度不合适	2. 适当调整链条松边垂度
	3. 润滑不良	3. 改善润滑条件
	4. 链箱或支承松动	4. 紧固链箱或支承
	5. 链条或链轮磨损严重	5. 更换磨损的链条或链轮
	6. 链条选型不当，节距过大	6. 链条重新选型，采用小节距
	7. 链轮齿数太少	7. 增加链轮齿数，如不能重新设计
链条跳齿	1. 链条太松，使垂度过大	1. 适当张紧
	2. 链条或链轮磨损严重	2. 更换链条或链轮
	3. 严重超载	3. 选用高强度链条，消除过载原因
链条脱不开链轮	1. 链轮不对正	1. 重新对正链轮
	2. 链轮磨损严重	2. 更换链轮
链条死节	1. 链轮不对正	1. 重新对正链轮
	2. 链条铰链中有杂物	2. 清除铰链处杂物
	3. 润滑不良	3. 改善润滑条件
	4. 载荷过大	4. 减小载荷或改用强度适合的链条
	5. 链条锈蚀	5. 改用防锈蚀链条
	6. 链板或附件干涉	6. 检查链条是否干涉

链传动维护保养 Maintenance For Roller Chain Drive

故障症状	可能的原因	维修措施
滚子碎裂、 出现裂纹或变形	1. 链条节距过大或链轮齿数太小	1. 选用小节距链条或增加链轮齿数
	2. 链轮齿沟有杂物	2. 清除齿沟杂物或更新链条
	3. 链条在链轮齿上爬位过高	3. 更换链条，适当张紧
	4. 链条受冲击过大	4. 减小链条冲击
销轴旋转或 链板孔被拉长	1. 链条过载	1. 消除过载原因，或更换大规格的链条
销轴断裂或链板沿 链板孔连线方向断裂	1. 严重超载	1. 消除过载原因或重新选用大规格或强度更高的链条；如发现链轮有问题的征兆，必须更换链轮
链板断裂	1. 载荷大于链条动载承受能力	1. 选用大节距链条，或减小动态载荷
链板或链轮齿严重侧磨	1. 链轮不共面或链轮端面跳动严重	1. 提高加工与安装精度
	2. 链轮支承刚度差	2. 提高支承件刚度
	3. 链条扭曲严重	3. 更换合适链条
外链节外侧擦伤	1. 链条未张紧，发生跳动，从而与邻近物体相撞	1. 使链条适当张紧
	2. 链箱变形或内有杂物	2. 消除链箱变形，清除杂物
销轴磨损或 销轴与套筒胶合	1. 润滑不良	1. 提供适当的润滑系统
	2. 链条速度过高或载荷过大	2. 降低速度或载荷
链轮齿磨损严重	1. 润滑不良	1. 改善润滑条件
	2. 链轮材质较差，齿面硬度不足	2. 提高链轮材质和齿面硬度
卡簧、开口销等链条 止锁元件松脱	1. 链条抖动过烈	1. 当张紧或考虑增设导板托板
	2. 有障碍物磕碰	2. 消除障碍物
	3. 止锁元件安装不当	3. 改善止锁元件安装质量

链传动维护保养 Maintenance For Roller Chain Drive

■ Maintenance for Roller Chain Drive

It's very practical to illustrate the conventional maintenance of roller chain drive because of its wide application in industry. Better maintenance, less failure. In practice, only following some simple maintenance principals, we can easily save costs and make its service life longer, and then making the operation more efficient.

- 1、Each sprocket in the driving system should have good coplanarity and the chain path should always be smooth.
- 2、The sagging of chain loose side should be suitable and for the adjustable center distance level and angle drive, the sagging should be 1%~2% of the center distance. For conditions of vertical drive and under vibration load, reverse drive and dynamic brake, the sagging should be smaller. It's very important to check and adjust the loose side sagging frequently in the chain drive maintenance.
- 3、Good lubrication is also very important. Whichever lubrication method you choose, the most important thing is to make the lubricating grease distribute evenly in each chain joint clearance. If not necessary, avoid selecting big viscosity heavy oil or lubricating grease since it will jam the clearances gone to joints friction surface with dust after a period of time. Periodically clean the roller chain and check its lubrication condition frequently. Disassembly the pin and bush, if necessary. If the friction surface is brown or dust color, it may be caused by insufficient lubrication.
- 4、Chains and sprockets should be always in good condition.
- 5、Frequently check the working surface of sprocket teeth, adjust or replace it when it's excessively worn.

Troubleshooting Instructions

Failure Symptom	Possible Causes	Actions
Very noisy	1.unalignment of sprockets	1.realignment of sprockets
	2.unsuitable loose side sagging	2.make suitable adjustment of chain loose side sagging
	4.chain box or bearing loose	3.improve lubrication conditions
	3.bad lubrication	4.fasten chain box or bearing
	5.excessive wear of chain or sprocket	5.replace worn chains or sprockets.
	6.wrong selection of chain type and too big pitch	6.reselect chain type and adopt smaller pitch
	7.too small number of sprocket teeth	7.add chain teeth number or redesign it
Chain jumps off from sprocket teeth	1.chain is very loose which makes the sagging too big.	1.make suitable tensioning adjustment
	2.excessive wear of chain or sprocket	2.replace the chain or sprocket
	3.excessive overloading	3.select high strength chain to avoid overloading
The chain can't be taken off from the sprocket.	1.unalignment of sprocket	1.realignment of sprocket
	2.excessive wear of sprocket	2.replace it
Dead link of chain	1.unalignment of sprocket	1.realignment of sprockets
	2.with foreign bodies in chain joints	2.remove the foreign bodies of joints
	3.bad lubrication	3.improve lubrication conditions
	4.too big load	4.reduce the load or adopt suitable chain
	5.the corrosion of chain	5.choose anticorrosion chain
	6.the interferences between plates or attachments	6.check the interferences of chain

链传动维护保养

Maintenance For Roller Chain Drive

Failure Symptom	Possible Causes	Actions
Roller cracked or deformed	1.too big chain pitch or too small number of sprocket teeth	1.select small pitch chain or add sprocket teeth number
	2.Sprocket teeth have foreign bodies.	2.remove all the foreign bodies or replace chain
	3.The chain climbs onto sprocket teeth too high.	3.replace the chain and make appropriate tensioning
	4.excessive chain impact load	4.reduce the impact of chain
Pin rotates or plate hole drawn long	1.chain overloaded	1.eliminate the overloading causes or adopt large specification chain
Pin broken or plate broken along the hole connecting line direction	1.excessive overloading	1.eliminate the overloading causes or adopt large specification or higher strength chain; if sprocket failure symptom found, replace it
Plates broken	1.the load above chain dynamic capacity	1.selecting big pitch chain or reduce dynamic load
Excessive side-wear of plates or sprocket teeth	1.sprocket not coplanar or ending beat severely	1.increase machining and installation precision
	2.bad bearing stiffness of sprocket	2.increase bearing parts stiffness
	3.severe twist of chain	3.replace chain
Outer link outside rubbed	1.chain not tensioned and jump, then to hit adjacent bodies	1.make appropriate chain tensioning
	2.chain box deformed or with foreign bodies inside	2.eliminate chain box deformation and remove foreign bodies
Pin worn or bush bonded with pin	1.bad lubrication	1.supply suitable lubrication system
	2.chain speed too high or chain overloaded	2.lower the speed or reduce the load
Excessive wear of sprocket	1.bad lubrication	1.improve lubrication conditions
	2.inferior material of sprocket and insufficient teeth surface hardness	2.improve sprocket material quality and its teeth surface hardness
Locking parts such as spring clip and cotter pin etc. become loose.	1.chain wobbling heavily	1.make suitable tensioning or consider adding supporting board for guide plate
	2.knock with obstructions	2.remove all obstructions
	3.locking parts wrong installed	3.improve the installation quality of locking parts